




CFM40M SERIES

40W MEDICAL AND ITE OPEN FRAME AC-DC MODULES



Features

- * Universal Input Range 90~264VAC
- * Efficiency to 88% Typical
- * Continuous Short Circuit Protection
- * No Load Power Consumption<0.3W
- * 2"x 3" Size
- * Meets 2 MOPP
- * Medical and ITE Approved
- * Meets IEC/EN60335-1
- * Meets EN55011 and EN55032 Class B

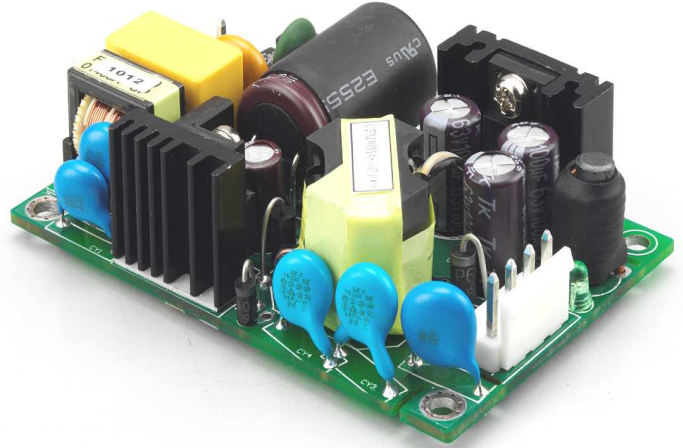


| MODEL | OUTPUT VOLTAGE | OUTPUT CURRENT | RIPPLE & NOISE NOTE 2 | VOLTAGE ACCURACY NOTE 1 | LINE REGULATION NOTE 3 | LOAD REGULATION NOTE 4 | % EFF (Typ.) NOTE 5 |
|-----------|----------------|----------------|--------------------------|----------------------------|---------------------------|---------------------------|------------------------|
| CFM40M033 | 3.3 V | 6 A | 50 mV | ±1% | ±0.5% | ±1% | 76% |
| CFM40M050 | 5 V | 6 A | 1% | ±1% | ±0.5% | ±1% | 80% |
| CFM40M090 | 9 V | 4.45 A | 1% | ±1% | ±0.5% | ±1% | 84% |
| CFM40M120 | 12 V | 3.34 A | 1% | ±1% | ±0.5% | ±1% | 86% |
| CFM40M150 | 15 V | 2.67 A | 1% | ±1% | ±0.5% | ±1% | 87% |
| CFM40M240 | 24 V | 1.67 A | 1% | ±1% | ±0.5% | ±1% | 88% |
| CFM40M300 | 30 V | 1.33 A | 1% | ±1% | ±0.5% | ±1% | 88% |
| CFM40M360 | 36 V | 1.11 A | 1% | ±1% | ±0.5% | ±1% | 88% |
| CFM40M480 | 48 V | 0.834 A | 1% | ±1% | ±0.5% | ±1% | 88% |

Specifications are subject to change without notice.

Mechanical Specification

CFM40MXXX-C

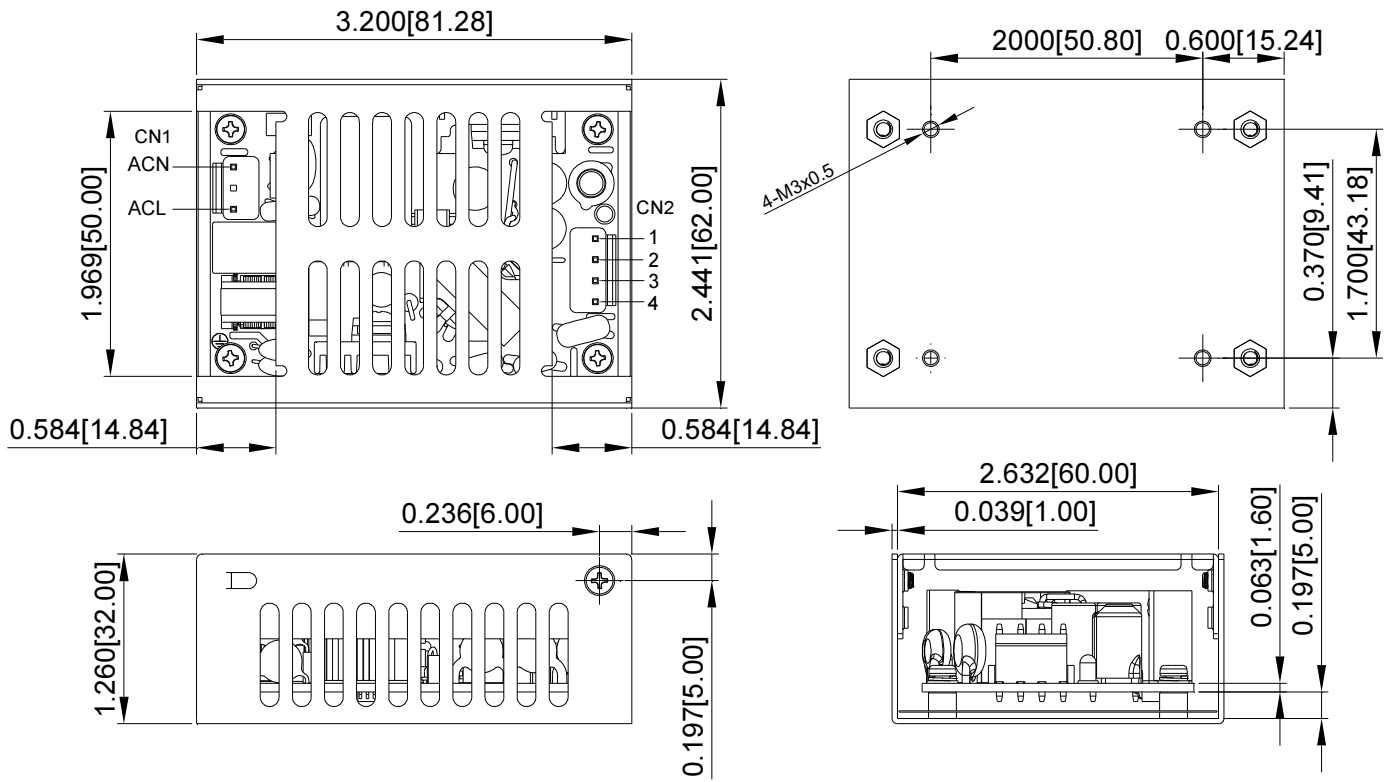

Typical at 25°C, nominal line and 75% load, unless otherwise Specified

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [Cincon](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [VI-LUL-IU](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-](#)
[OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#)
[TVQF-1219-18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-](#)
[0028G](#) [EP3000AC48INZ](#) [VP-C2104853](#)