


DL-806 Series The Professional Hex Crimping Tool For Crimping BNC,F,TNC Connectors.

Specification:

Item No:

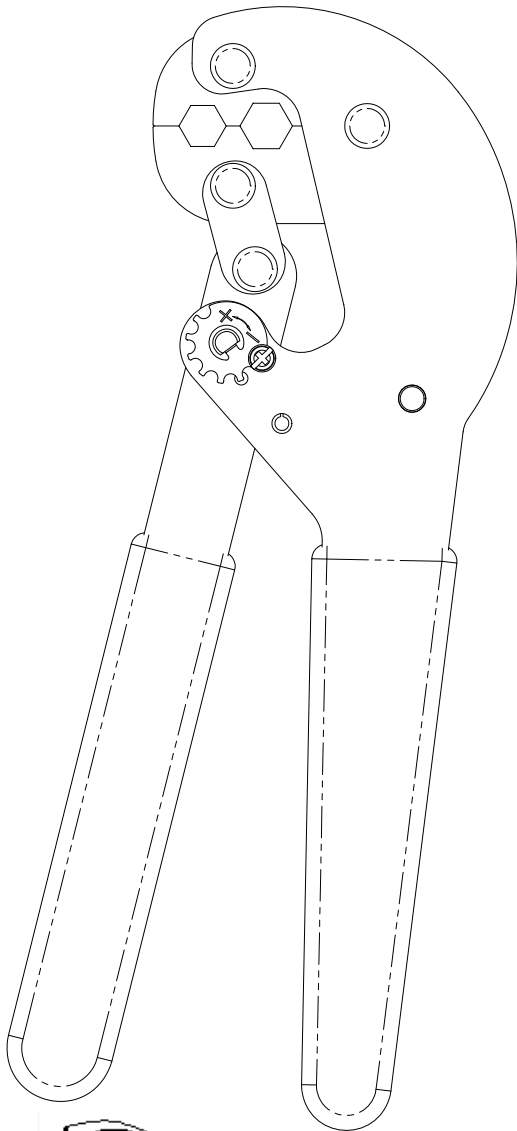

w/ Adjustment

DL-	±0.10			Crimping Cable Size	
806A	.255"(6.48mm)	.213"(5.40mm)	.068"(1.72mm)	RG-58,59,62	
806B	.324"(8.22mm)	.255"(6.48mm)	.068"(1.72mm)	RG-59,62,6	
806C	.324"(8.22mm)	.216"(5.48mm)	.068"(1.72mm)	RG-58,6	
806D	.255"(6.48mm)	.213"(5.40mm)	.068"(1.72mm)	RG-58,59,62	
806E	.213"(5.40mm)	.324"(8.22mm)	.448"(11.4mm)	RG-58,6,11,213	
806F	.100"(2.54mm)	.324"(8.22mm)	.476"(12.1mm)	RG-6,11,213	
806G	.100"(2.54mm)	.324"(8.22mm)	.448"(11.4mm)	RG-6,11,213 BELDEN8281	
806H	.324"(8.22mm)	.359"(9.12mm)		F-59,62,6	
806J	.472"(12.1mm)	.361"(9.18mm)		F-59,6,11	
806L	.100"(2.54mm)	.359"(9.12mm)	.406"(10.3mm)	F-59,6,11& UHF-58,8	
806M	.100"(2.54mm)	.359"(9.12mm)	.475"(12.06mm)	F-59,6,11	
806N	.133"(3.38mm)	.151"(3.84mm)	.122"(3.10mm)	.188"(4.78mm)	ST/SC FIBER OPTIC
806P	.095"(2.41mm)	.386"(9.80mm)	.453"(11.5mm)		
806Q	.324"(8.22mm)	.470"(11.94mm)		F-59,6,11,213	
806R	.480"(12.19mm)	.362"(9.19mm)		F-59,6,11	
806S	.102"(2.60mm)	.406"(10.30mm)		UHF-8	
806T	.096"(2.44mm)	.410"(10.40mm)	.475"(12.06mm)	UHF-8,F-11	
806U	.255"(6.48mm)	.068"(1.72mm)	.360"(9.14mm)	F-59,6	
806X	.076"(1.93mm)	.338"(8.60mm)		TWINAX CONN	

*All Above Tools With Adjustment, Except DL-806A

* **Length:** 9" (225+/-3mm)

* **Material:** Carbon Steel And Hardness

* **Weight:** 380g

* **Finished:** Black oxide finished.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [cnc manufacturer](#):

Other Similar products are found below :

[741-20010-00500](#) [DL-5468](#) [2725-2828-01000-T](#) [300-30-40-GR-0250F](#) [743-60012-00300](#) [302-28-50-GR-0250F](#) [302-28-10-GR-0100F](#)
[3020-10-0300-00-TR](#) [FM-213-4](#) [FM-214-4](#) [302-28-26-GR-0250F](#) [302-28-40-GR-0250F](#) [304-28-26-MC-0250F](#) [304-28-40-MC-0250F](#)
[302-28-09-GR-0250F](#) [1002-003-02000](#) [302-28-37-GR-0250F](#) [302-28-25-GR-0250F](#) [3020-10-0300-00](#) [300-30-14-GR-0250F](#) [302-28-14-GR-](#)
[0250F](#) [300-30-04-GR-0250F](#) [300-30-26-GR-0250F](#) [304-28-16-MC-0250F](#) [304-28-26-MC-0100F](#) [302-28-10-GR-0250F](#) [800-1401-2-SJT0-](#)
[BL-00200](#) [300-30-20-GR-0250F](#) [304-28-14-MC-0250F](#) [800-1800-2-SVT0-BL-00100](#) [741-20010-01000](#) [CNC-99-16](#) [302-28-20-GR-0100F](#)
[302-28-26-GR-0100F](#) [304-28-40-MC-0100F](#) [600218](#) [510-26-6600-WH-0007F](#) [610230](#) [3010-10-003-13-00](#) [304-28-14-MC-0100F](#) [302-28-50-](#)
[GR-0100F](#) [3030-16-0102-00](#) [3221-10-0300-00](#) [304-28-16-MC-0100F](#) [610234](#) [302-28-37-GR-0100F](#) [800-12-32D-BL-0008F](#) [FM-215-8](#) [DL-](#)
[1006](#) [304-28-20-MC-0250F](#)