

产品承认书

SPECIFICATION FOR APPROVAL

CUSTOMER: _____

CUSTOMER P/N: _____

CND-TEK P/N. : _____ QA021G00

DESCRIPTION: _____ SMD PULSE TRANSFORMER

REF NO: _____ QTC-003

REV/NO: _____ A/0

DATE: _____ 2022/05/18

ATTACHMENT:			
<input checked="" type="checkbox"/>	SPECIFICATION		
<input checked="" type="checkbox"/>	SAMPLE	Q'TY OF SAMPLES	PCS

	√	CUSTOMER'S SIGNATURE	REMARK
FULL APPROVED			
CONDITIONAL APPROVED			
REJECTED			



QA021G00

SMD PULSE TRANSFORMER



V1.0.1
May 18,2022



深圳磁联达电子有限公司

Shenzhen CND-TEK Electronics Co.,Ltd

公司地址: 深圳市南山区西丽镇街道百旺社区牛城村牛城路221号505

TEL: 86-755-29016433 FAX:86- 755-27652977

Email: sales2@cd-tek.com

Http: //www.cd-tek.com

1. FEATURES:


- 1.1 Meets IEEE 802.3at Standards.
- 1.2 Designed For 2.5G BASE-T Applications, Surface Mount Type.
- 1.3 Operating Temperature Range: -40 °C to +85 °C.
- 1.4 RoHS Compliant.
- 1.5 720mA Current Capability.

2. ELECTRICAL SPECIFICATIONS @25C°


- 2.1 **Turns Ratio** ($\pm 5\%$): 1CT:1CT
- 2.2 **OCL(uH Min)** [100kHz/0.1V] With 10.BmA DC Bias : 120
- 2.3 **CWW(pF Max)**@100KHz,0.1V:35
- 2.4 **DCResistance (Ω) max:** 1.20
- 2.5 **Return Loss(dB Min):** -23@1.0-40MHz
-23+15*Log1 O(F/40)@40-200MHz
- 2.6 **Insertion Loss (dB Max):** -0.8@1-100MHz
-1.2@100-200MHz
- 2.7 **HI-POT (Vrms):** 1500

DRAWN BY:	CHECKED BY:	APPROVED BY:	CUSTOMER:
zouwenqiang	Liyonghua	wangshengli	PART NO. : QA021G00
 深圳磁联达电子有限公司			REV. : A1
			PAGE: 3 OF 5


3. SCHEMATICS:

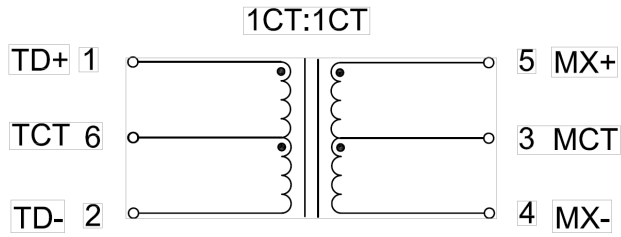


4. DIMENSIONS & MARKING:




TOP VIEW



SUGGEST LAYOUT



BOTTOM VIEW



FRONT VIEW

Unless otherwise specified all tolerances are:±0.25 in mm

DRAWN BY:

CHECKED BY:

APPROVED BY:

CUSTOMER:

zouwenqiang

Liyonghua

wangshengli

PART NO. :QA021G00

CND-TEK


深圳磁联达电子有限公司

REV.: A1

PAGE: 4 OF 5


CND-QTC-003

5. Typical Impedance v.s. Frequency Curve:

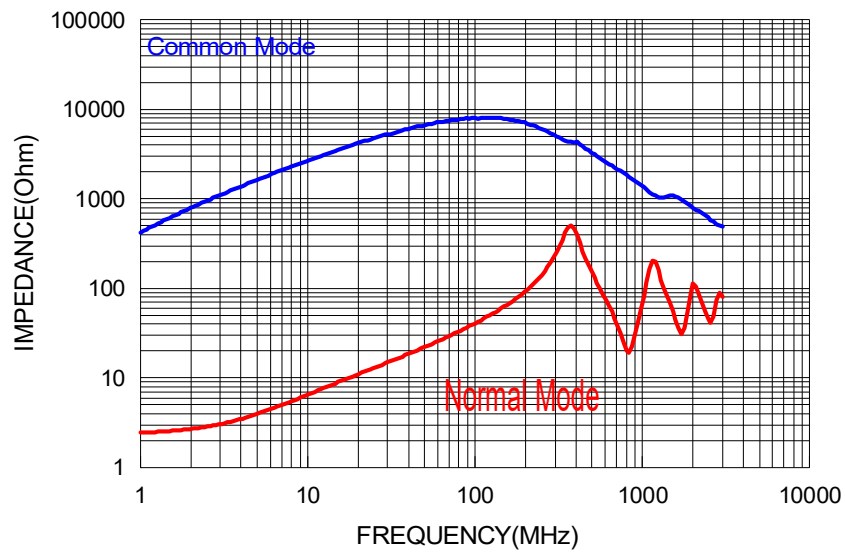

6. Materials:

No.	Description	Specification
a.	Upper Plate	Ferrite
b.	Core	Ferrite Core
c.	Termination	Tin (Pb Free)
d.	Wire	Enameled Copper Wire

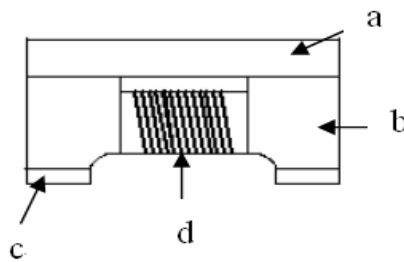

DRAWN BY:	CHECKED BY:	APPROVED BY:	CUSTOMER:
zouwenqiang	Liyonghua	wangshengli	PART NO. : QA021G00
 深圳磁联达电子有限公司			REV. : A1 PAGE: 5 OF 5

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [CND-tek](#) manufacturer:

Other Similar products are found below :

[74279408](#) [PE-62911NL](#) [PE-64683](#) [RD5122-6-9M6](#) [RGCMF1210900H3T](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [T8114NLT](#) [RD5122-10-6M0](#)
[TCM0806G-350-2P-T](#) [TCM0806G-650-2P-T](#) [B2013FNLT](#) [IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSU10VR15019](#)
[UALSU9VD070100](#) [36-00037](#) [5701610000](#) [UALW21HS072450](#) [UALSU9HF050500](#) [UALSU9H0208000](#) [UAL24VK06450CH](#)
[PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#) [PE-67531](#) [TLH10UB](#) [113 OR5](#) [2752045447](#) [CMS3-11-R](#) [7351V](#)
[CMF16-153131](#) [744252510](#) [T8116NLT](#) [CMS2-10-R](#) [FE2X10-4-2NL](#) [744253200](#) [744253101](#) [744252220](#) [TX8111NLT](#) [UAL30VR3500470](#)
[CTX01-19077-R](#) [T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#) [7446630047](#) [744136](#) [744150](#) [RC212-0.25-47M](#) [RC212-0.5-10M](#)