

Ø 27.5 mm 3.2 Watts 3.2 W Part number 82720002


- Long service life
- Resistant to prolonged jamming
- Class A EMC interference suppression
- Compatible with 6 V, 9 V or 12 V battery power supply
- Optional class B interference suppression
- Optional encoder

Part numbers

	Type	Type	Voltage	References
82720002	3.2 W	827200	24 V	Without option

Specifications
No-load characteristics

Speed of rotation (rpm)	4740
Absorbed power (W)	1,2
Absorbed current (A)	0,049

Nominal characteristics


Speed (rpm)	3500
Torque (mNm)	7
Usable power (W)	2,6
Absorbed power (W)	5,0
Absorbed current (A)	0,21
Gearbox case temperature rise (°C)	25
Efficiency (%)	51

General characteristics

Conformity to standard EN 55022 (radiated EMC)	Class A
Temperature rise conf. to EN 60950	■
Coil wire insulation class	H
Protection rating	IP 30
Max. output power (W)	3,20
Start torque (mNm)	26
Starting current (A)	0,64
Resistance (Ω)	37,5
Inductance (mH)	52
Torque constant (Nm/A)	0,044
Electrical time constant (ms)	1,4
Mechanical time constant (ms)	16,5
Thermal time constant (mn)	6,3
Inertia (g.cm ²)	9
Weight (g)	70
Number of of segments	5
Service life (h)	4000
Sintered bronze bearings	■

Dimensions (mm)

82720001 - 82720002

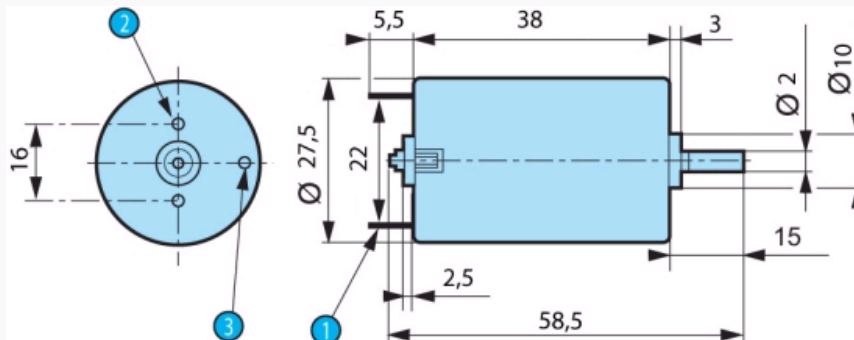


N° | Legend

①	2 solder tags 2.8 x 0.5 mm
②	2 holes M2.6 screw depth max. 3 mm
④	Hole \varnothing 2.38 mm

Curves


Curve : torque/speed 827200

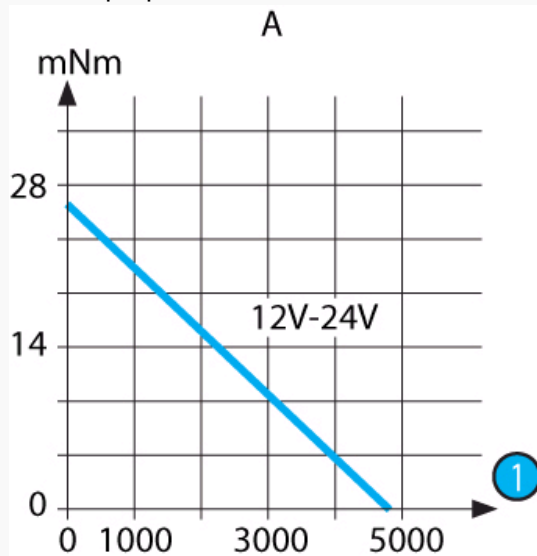

N°	Legend
①	rpm

Curves

Curve : torque/current 827200

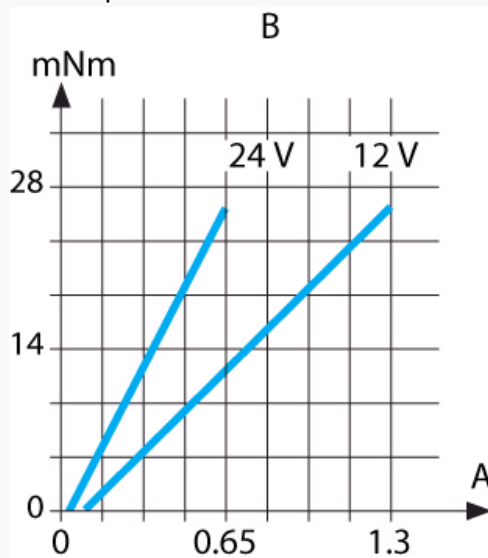

Product adaptations



- Encoder with different number of pulses per revolution
- Push-fit pinion
- Additional connectors

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [AC, DC & Servo Motors](#) category:

Click to view products by [Crouzet](#) manufacturer:

Other Similar products are found below :

[79207644](#) [805470B40040MY](#) [80807028](#) [808070Y01125Z](#) [808550Y00049Z](#) [823055C10001MWY](#) [82520405](#) [82664024](#) [82802504](#)
[R88MK10030H](#) [M4E068-EC03-01](#) [M4E068-CF01-01](#) [79265119](#) [80510503](#) [805470A40040MY](#) [805470B40020MY](#) [80627003](#)
[808070Y00250Y](#) [808070Y83.33Y](#) [823055A20001MW](#) [825140A40010MP](#) [825290C43.75MX](#) [82714023](#) [82800003](#) [82830009](#) [82810017](#)
[R88M-K90010F-S2](#) [R88M-K1K030H-S2](#) [89830012](#) [82840003](#) [82840004](#) [82869011](#) [82524021](#) [82862202](#) [82869006](#) [82861013](#) [80803009](#)
[80547015](#) [82862205](#) [R88M-K40030T-B](#) [80527006](#) [82330514](#) [81021118](#) [82524004](#) [89800008](#) [82867009](#) [82662564](#) [82662515](#) [82600041](#)
[82524008](#)