
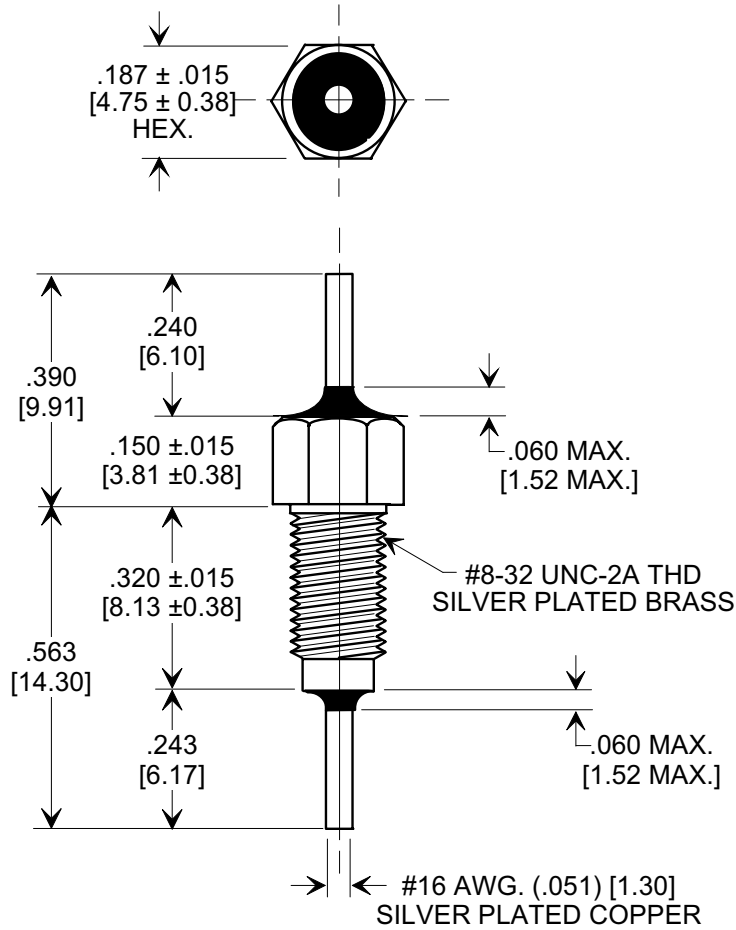



Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

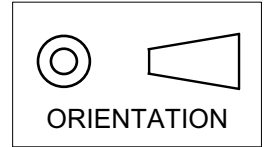

NOTES:

1. SUPPLIED WITH SILVER PLATED HEX NUT AND INTERNAL TOOTH LOCK WASHER.
2. TUSONIX STANDARD PART NUMBER: 2425-601-X5W0-103Z.. TUSONIX RoHS COMPLIANT PART NUMBER: 2425-601-X5W0-103Z LF. CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
3. PART MARKING: STANDARD BLACK INK FOR TRADEMARK AND CAP CODE. RoHS PART: GREEN TRADEMARK AND CAP CODE.
4. MOUNTING TORQUE NOT TO EXCEED 5 lb - in. MAX. [.565 N-m]

SPECIFICATIONS

Tusonix Style:	2425-601
Capacitance Value:	10,000 pF
Capacitance Tolerance:	+80 / -20%
Temp. Characteristic:	X5W
Rating:	200 VDC @ + 85°C / 100 VDC @ +125°C
Current (A):	20
Operating Range:	-55°C TO +125°C
Insulation Resistance:	10,000 megohms (min.) @ +25°C
DWV @ 2 Sec. Min:	600 VDC

X-2015 Rev-0

REVISION RECORD	Original Release C.O. 19991022-14-01	0	TUSONIX STYLE, CURRENT (A), DWV COLUMNS ADDED & NOTE 2 & DIM'S REVISED L.E. 05-27-04
	20040514-3-17		
	ADDED NOTES 2 & 3. S.M. 08-26-05		
	20050826-1-01	2	

--TOLERANCES-- Unless Otherwise Specified
DECIMAL ± $\frac{.031}{[0.79]}$
ANGLES ± $\frac{\text{---}}{\text{---}}$
TUSONIX TUCSON, ARIZONA

Title BUSHING TYPE FEED-THRU CAPACITOR	
Drawn S.M. 10-22-99	Scale 3 X
Approved B.M. 10-22-99	
A	2425-601-X5W0-103Z

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [EMI Feedthrough Filters](#) category:

Click to view products by [CTS](#) manufacturer:

Other Similar products are found below :

[FN7611-63-M6](#) [FN7612-10-M3](#) [FN7660-100-M8](#) [1202F-054](#) [1609991-8](#) [1609992-2](#) [16DFC6-C](#) [16FFD6-HE](#) [2-1609992-2](#) [2443-007-X5S0-102MLF](#) [2443-007-X5W0-502ZLF](#) [2463-001-X5S0-471MLF](#) [1609990-8](#) [1609991-3](#) [1609992-1](#) [1609992-3](#) [1609993-1](#) [1609993-7](#)
[200AFC6-P](#) [200DFC6-P](#) [FN7510-100-M8](#) [FN7510-32-M4](#) [FN7562-100-M8](#) [FN7562-200-M10](#) [FN7563-100-M8](#) [FN7611-10-M3](#) [FN7612-63-M6](#) [FN7661-16-M4](#) [2450-001-X5U0-102PLF](#) [2499-003-X5S0-152MLF](#) [32AFC6-H](#) [4100-000LF](#) [4201-050LF](#) [4204-001LF](#) [4253-002LF](#)
[4306-019LF](#) [4101-004LF](#) [4201-003LF](#) [4208-000LF](#) [4600-067](#) [094-6526-0000](#) [100AFC6-G](#) [10AFC6-B](#) [10DFC6-C](#) [1-1609990-3](#) [1-1609990-7](#) [1-1609992-8](#) [1-1609990-1](#) [1-1609991-1](#) [FN7514-32-M4](#)