


# DAIGOK 选型规格指引

型号	NPN		PNP		NPN		PNP		NPN		PNP	
操作模式	NO常开	NC常闭	NO常开	NC常闭	NO常开	NC常闭	NO常开	NC常闭	NO常开	NC常闭	NO常开	NC常闭
选型规格	DL-2C8AN-UP	DL-2C8BN-UP	DL-2C8AP-UP	DL-2C8BP-UP	DL-2C8AN	DL-2C8BN	DL-2C8AP	DL-2C8BP	DL-2C10AN-UP	DL-2C10BN-UP	DL-2C10AP-UP	DL-2C10BP-UP
产品图												
外观尺寸	H7.5*W7.8*L24mm				H9*W8*L25mm				H6*W10*L27mm			
孔径	Ø2.8mm				Ø3.0mm				Ø4.0mm			
检测动作距离	SN2mm				SN2mm				SN3mm			
环境温度	0至50°C无冻结											
工作湿度	35至95%无凝结											
防护等级	IP65											
外壳	塑料											
电压	6-36VDC											


## 常开时

未感应到金属物体时常开触点总是处于断开状态  
感应到金属物体时常开触点总是处于接通状态




## 常闭时


未感应到金属物体时常闭触点总是处于接通状态  
感应到金属物体时常闭触点总是处于断开状态



1. 检测到不同材料的物体，其检测距离不同，如下图；
2. 安装：螺丝安装，因受温度、电压的影响，一般安装额定检测距离的85%；
3. 检测面应定期做好清理金属粉尘等沉积物，以免影响性能；
4. 使用环境温度：-25°C~+65°C；相对湿度：35-95%HR；
5. 振动：耐久：10~55Hz 复振幅 1.5mm，X、Y、Z各2小时；
6. 冲击：耐久：500m/s(约50g)，X、Y、Z向10次；
7. 在强磁场环境下使用，建议使用屏蔽导线。

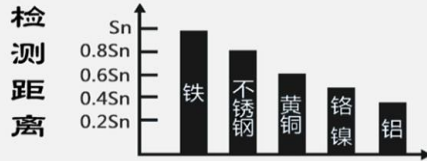

注意：SN为检测动作距离

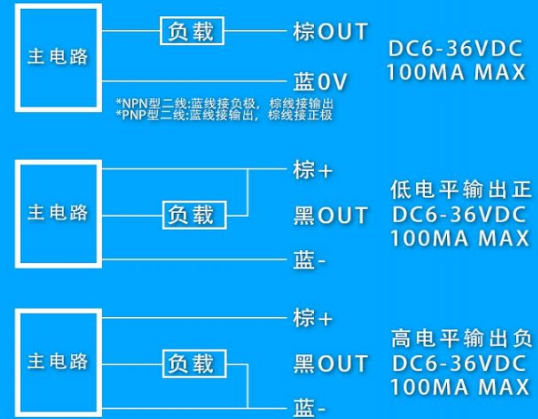

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Board Mount Hall Effect/Magnetic Sensors](#) category:*

*Click to view products by [DAIGOK](#) manufacturer:*

Other Similar products are found below :

[HGPRDT005A](#) [AH1894-FA-7](#) [AH277AZ4-AG1](#) [AV-10448](#) [SS41C](#) [AH1894-Z-7](#) [TLE4946-1L](#) [TLE4976L](#) [SS85CA](#) [BU52003GUL-E2](#)  
[AH277AZ4-BG1](#) [AH3376-P-B](#) [TLE4941](#) [AH3382-P-B](#) [TLE4945-2L](#) [AH3360-FT4-7](#) [TLE4941-1](#) [AH374-P-A](#) [SS41-JL](#) [AH1913-W-7](#)  
[AH3373-P-B](#) [MA732GQ-Z](#) [MA330GQ-Z](#) [S-57K1NBL2A-M3T2U](#) [S-57P1NBL9S-M3T4U](#) [S-576ZNL2B-L3T2U](#) [S-576ZNL2B-A6T8U](#) [S-](#)  
[57P1NBL0S-M3T4U](#) [S-57A1NSL1A-M3T2U](#) [S-57K1RBL1A-M3T2U](#) [S-57P1NBH9S-M3T4U](#) [S-57P1NBH0S-M3T4U](#) [S-57A1NSH1A-](#)  
[M3T2U](#) [S-57A1NSH2A-M3T2U](#) [S-57K1NBH1A-M3T2U](#) [S-57A1NNL1A-M3T2U](#) [S-5701BC11B-L3T2U5](#) [S-57GNNL3S-A6T8U](#) [S-](#)  
[57TZ1L1S-A6T8U](#) [S-57GSNL3S-A6T8U](#) [S-5716ANDH0-I4T1U](#) [S-57GSNL5S-L3T2U](#) [S-57GDNL3S-L3T2U](#) [S-57GNNL3S-L3T2U](#) [S-](#)  
[57RBNL8S-L3T2U](#) [S-57RBNL9S-A6T8U](#) [S-57RB1L8S-L3T2U](#) [S-57GDNL5S-L3T2U](#) [S-57RBNL9S-L3T2U](#) [S-57TZ1L1S-L3T2U](#)