


REV	LOCAS	DESCRIPTION	DRAW	DATE
01	NEW	INITIAL RELEASE	Junly	2010.08.16
05		ECN20120040	Huang	2012.09.26
06		ADD LOGO	Wang	2014.03.17



NOTES:

1. MATERIAL:

1.1 Housing:High Temperature Thermoplastic
UL94V-0; Color Black.

1.2 Terminal:Copper Alloy.

1.3 Nail:Stainless Steel

2. SPECIALITY:

2.1 Rated current:2.0A

2.2 Rated voltage:30V

2.3 Contact Resistance:50mΩ MAX

2.4 Insulation Resistance:100MΩ MIN

2.5 Dielectric withstanding voltage: 250V AC.


2.6 Solder ability:245±5°C, 5±0.5s.

2.7 Durability:5000 Cycles Min.

2.8 Operating condition:Temperature: -30°C~+80°C;


Humidity: 80% R.H MAX

Ordering Information

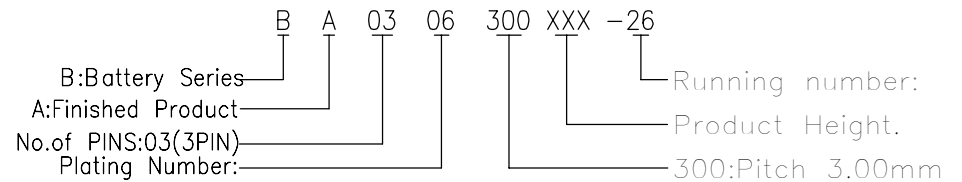

PART No.	DIM A	DIM B	PART No.	DIM A	DIM B
BA0306300450-26	4.50	3.00	BA0307300600-26	6.00	4.50
BA0306300500-26	5.00	3.50	BA0307300620-26	6.20	4.70
BA0306300550-26	5.50	4.00			

QUADRANT POINT	DongGuan D-CHAIN Precision Components CO, Ltd										
TANGENCY POINT											
INTERSECTION POINT											
UNLESS OTHERWISE SPECIFIED, TOLERANCE:	DESING	Huang	DATE	2012.09.26	TITLE:	3PIN BATTERY PH:3.00mm SMT TYPE WITH 2 POST					
X. ±0.25	CHECKED	Andy.L	DATE	2012.09.26	REV:	06	SCALE:	5:1	UNIT:	mm	
X.x ±0.20	APPROVED	Andy.L	DATE	2012.09.26	PART NO:	BA0306300XXX-26		SIZE:	A4	SHEET:	1/1
X.xx ±0.15	DRAWING NO: DQBA0306300450-26										
ANGULAR ±3'											

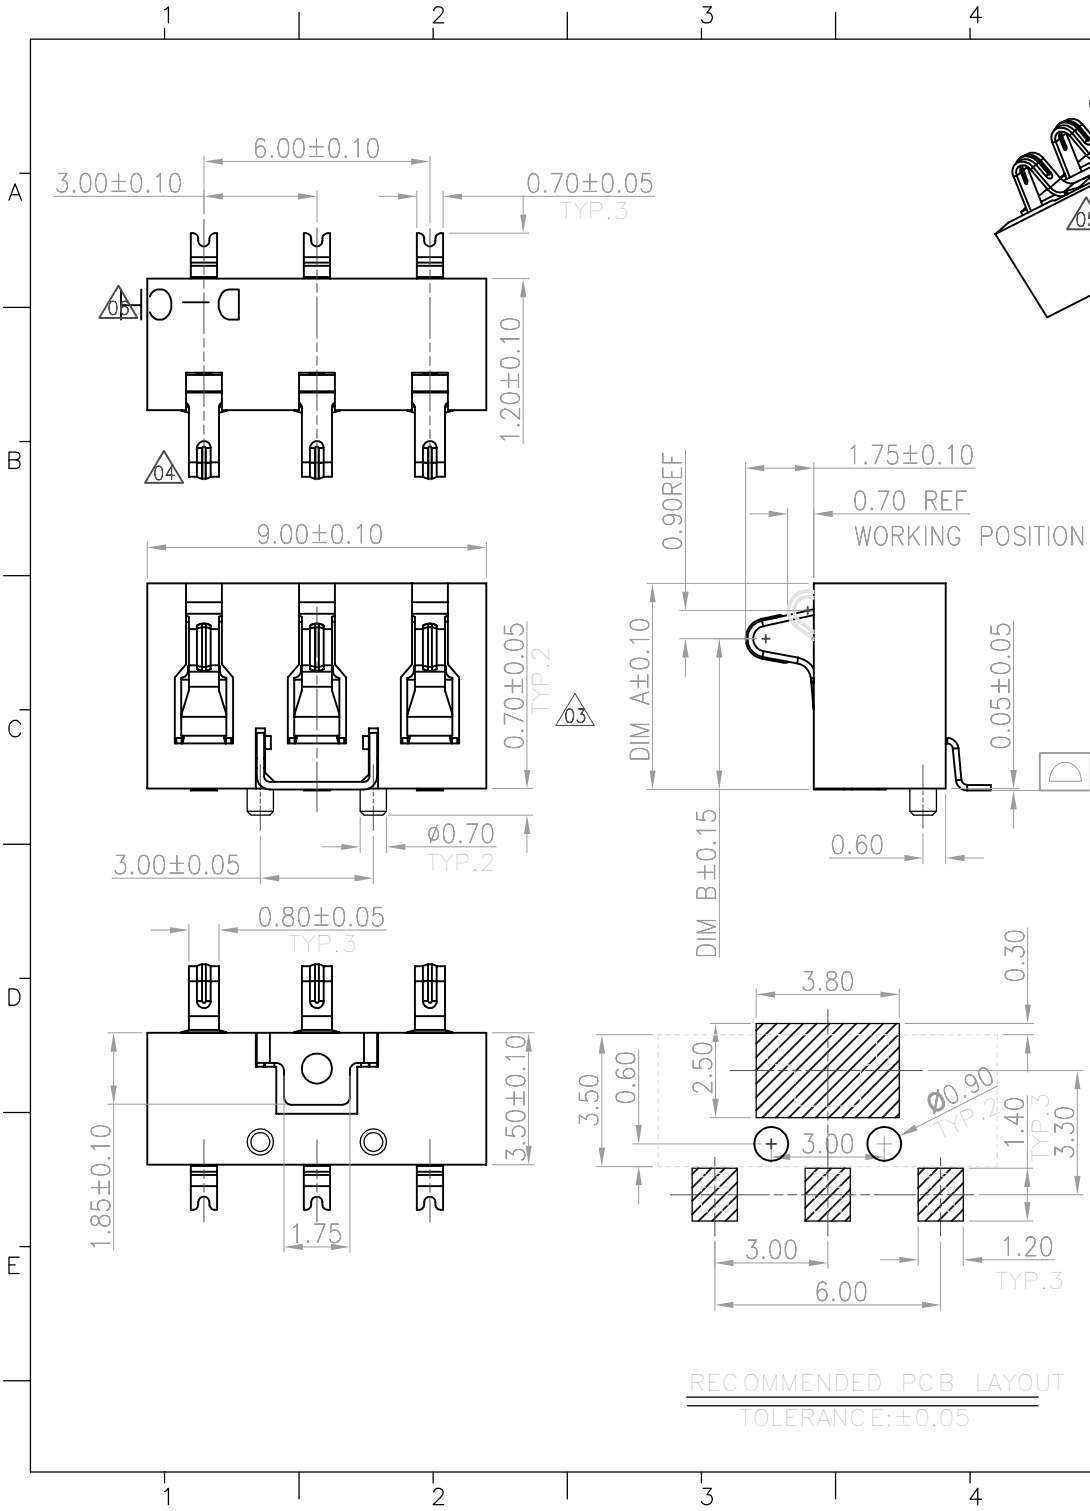

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Coin Cell Battery Holders](#) category:

Click to view products by [D-CHAIN](#) manufacturer:

Other Similar products are found below :

[PDSN-11-D](#) [799-2007](#) [BH44AAB](#) [BH48DL](#) [BH8000](#) [MY-2430-01-R](#) [BS-16-B4AA006-R](#) [KH-CR1220-2](#) [BH-18650-A1AJ006](#) [BH-18650-A1AJ005](#) [BS-12-B3AA009-R](#) [MY-FJ-131-J-R](#) [MY-FJ-04-J-R](#) [BS-24-A1AJ017](#) [BH-18650-A5BJ001-2D](#) [BS-12-A1AJ002-Z](#) [MY-2032-04-R](#) [BS-12-B3AA011-R](#) [BS-621-B4AA001-R](#) [MY-ZJ-110](#) [MY-FJ-127-R](#) [BS-06-B4AA002-R](#) [MY-1220-04](#) [BH-AAA-A1AJ001](#) [BS-12-B3AA003-T](#) [MY-FJ-115II-R](#) [BS-06-B4AK001-R](#) [BH-18650-B1BA007](#) [MY-FJ-115II](#) [BH-AAA-B5AA001](#) [BE-13-017](#) [MY-2477-01](#) [BS-12-B3AA013](#) [BC-25-5PD-300](#) [BS-08-B2AA016-R](#) [MY-AAA-22-J](#) [MY-AA-14-J](#) [MY-AAA-24-J](#) [MY-2032-28](#) [MY-FJ-01](#) [MY-1025-01](#) [MY-AA-5355-J](#) [BS-05-A1BJ018](#) [MY-2032-25-R](#) [BH-AA-B1AJ011](#) [MY-WJTP-01-J](#) [MY-1220-03-K](#) [BS-12-A1AJ017-F](#) [MY-AA-10](#) [BS-12-A3AA003](#)