

Large Incandescent Indicators

WITH LIGHT SHIELD LENS CAPS
FOR MOUNTING IN 1" CLEARANCE HOLE
FOR 24 TO 250V OPERATION




S-6
DOUBLE CONTACT
BAYONET BASE

See lamp ratings
on page K.

Recognized under the component
program of Underwriters'
Laboratories Inc.

75W., 125V.

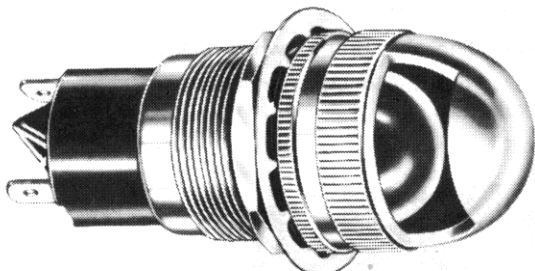

47-3402-2900-301

47 SERIES
49 SERIES
50 SERIES
151 SERIES

MATERIALS AND FINISHES:

- **Mounting Bushing:** Standard—brass, white nickel finish. Optional—black nickel finish.
- **Light Shield Cap:** Brass, polished chrome finish. Optional—black nickel finish.
- **Knurled Flange Ring:** Standard—brass, polished chrome finish. Optional—black nickel finish.
- **Internal-tooth Lockwasher:** Phosphor bronze, white nickel finish.
- **Terminals:** Solder — brass, hot tinned. Screws—brass, white nickel finish.
- **Quick Connect—**brass, tinned. Mate with standard female receptacles.
- **Mounting Nut:** Brass, white nickel finish.

WITH SCREW-ON LENS CAPS

fixed solder	fixed screw	quick connect
47-3402-29-301	47-3202-29-301	47-6602-29-301

BASE PART NUMBERS

CAP PART NUMBERS	COMPLETE ASSEMBLY PART NUMBERS		
<p>DOMES 47-2900-300 one opening, 3/8"x1"</p>	47-3402-2900-301	47-3202-2900-301	47-6602-2900-301
<p>DOMES 49-2900-300 one opening, 1/4"x1"</p>	49-3402-2900-301	49-3202-2900-301	49-6602-2900-301
<p>DOMES 50-2900-300 one opening, 1/8"x1"</p>	50-3402-2900-301	50-3202-2900-301	50-6602-2900-301
<p>DOMES 151-2900-300 one opening, 9/16"x1"</p>	151-3402-2900-301	151-3202-2900-301	151-6602-2900-301

Part numbers shown in gray are normally
in inventory at your Dialight Distributor.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Lamp Holders & Accessories](#) category:

Click to view products by [Dialight](#) manufacturer:

Other Similar products are found below :

[811730-1](#) [MS25041-6-327](#) [MS25041-8-327](#) [162-8430-0931-502-327](#) [PBMBN](#) [251-7538-15-504](#) [2802](#) [294502](#) [162-8430-0932-502-327](#) [183-9730-14-602](#) [21-16](#) [251-8738-15-504](#) [259-1930-29-801](#) [2707508753800](#) [350-0410-01-203](#) [367-8430-0971-503](#) [367-8430-09-802](#) [367-8430-09-810](#) [371-8738-14-504](#) [4610](#) [367-8430-0972-503](#) [367-8430-09-808](#) [367-8430-09-809](#) [492H412-9](#) [MS25256-2-327](#) [737AS15](#) [830-1430-14-503](#) [PBMBP](#) [851-1030-0001-504](#) [047340229301](#) [061131002301](#) [081041001100](#) [019310105301](#) [080320205303](#) [361-8836-0931-552](#) [1.71.209.001/0000](#) [1.71.209.001/0000](#) [1301910073](#) [04-12](#) [02-82](#) [26-07](#) [07-20](#) [101-8430-09-203](#) [177-8430-09-503](#) [162-8430-0937-502](#) [812-1030-09-506](#) [250-8738-14-504](#) [125-1310-11-103](#) [270-1930-702](#) [MS25041-7-327](#)