


3 x 5.5mm Rectangular *micro*LED® Optopipe® Optical Light Pipe, 3 Array

Dialight
.....
515-1000

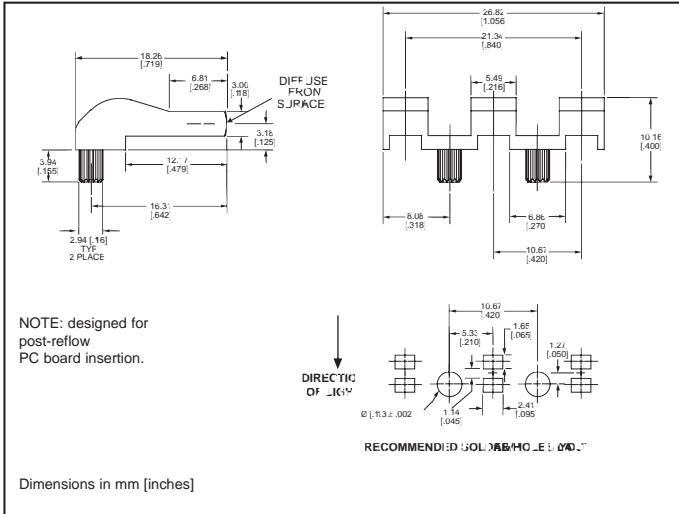

Recommended MicroLED SMT LEDs for use with 515-1000

<u>PART NO.</u>	<u>COLOR</u>	<u>PAGE #</u>
597-3001-2xx	Red	1-21
597-3111-5xx	AlGaAs Red	1-30
597-3121-2xx	AlGaAs Red	1-21
597-3211-2xx	Orange	1-21
597-3211-5xx	Orange	1-30
597-3301-2xx	Green	1-21
597-3301-5xx	Green	1-30
597-3401-2xx	Yellow	1-21
597-3401-5xx	Yellow	1-30
597-7701-2xx	Red/Green	1-23
597-7701-5xx	Red/Green	1-31
597-7721-2xx	Yellow/Green	1-23
597-7721-5xx	Yellow/Green	1-31
597-7731-2xx	Red/Yellow	1-24

Features

- High transmissivity polycarbonate material
- UL94V-0 compliance
- ESD protection (circuit isolation from front panel)
- Wide viewing angle
- Arrays reduce insertion costs
- Designed to replace rectangular right angle through-hole device
- Compatible with Dialight's 515-1001 single position Optopipe® Light Pipe
- Secures to PCB by press fit

Dialight Optopipe® Light Pipe Description

This Optopipe® is reliably held in place by 2 locating pins located between the light pipe elements. This Optopipe® functions as a through-the-case indicator, and has a textured finish on the light emitting surface that increases its viewing angle. The recommended light sources are Dialight's 597 Series PLCC-2 or PLCC-4 Type SMT LEDs. The SMT LEDs are mounted in a straight line on a 0.420" pitch. The light pipe material is water clear transmissive polycarbonate rated UL94-V0, and has a 35% oxygen index.

Dialight can provide custom Optopipe® solutions for your applications.

LED Data

For absolute maximum ratings and other electrical and optical data on the recommended LEDs, refer to LED data sheets.

Operating/Storage Temperature

-30°C to +100°C

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Dialight](#) manufacturer:

Other Similar products are found below :

[004-1830-29-201](#) [004-1830-29-207](#) [004-1930-29-203](#) [004-1930-29-207](#) [0042900300](#) [008-0000-948](#) [008-0111-200](#) [008-0112-203](#) [008-0132-200](#) [008-0133-200](#) [019-0410-05-301](#) [019-0511-303](#) [019-0531-303](#) [019-0532-303](#) [019-0533-300](#) [019-0533-303](#) [019-0534-300](#) [019-0535-200](#) [0190535300](#) [019-0535-303](#) [019-0901-05-301](#) [019310105301](#) [019-3202-05-301](#) [019-3202-05-303](#) [019-3206-05-303](#) [019-3402-05-203](#) [021-0410-2900-301](#) [021041029301](#) [021-1310-2900-301](#) [021-1310-29-201](#) [021-1310-29-301](#) [021-2900-200](#) [021-2900-300](#) [026-0410-11-301](#) [026-1111-200](#) [026-1111-203](#) [026-1111-300](#) [026-1112-203](#) [026-1112-300](#) [026-1113-203](#) [026-1131-203](#) [026-1131-300](#) [0261131303](#) [026-1132-203](#) [026-1132-300](#) [026-1132-303](#) [026-1133-203](#) [026-1133-300](#) [026-1134-300](#) [026-1135-203](#)