


31-432.036 - Leuchtdrucktasten-Vorsatz



Musterabbildung kann von Ihrem ausgewählten Artikel abweichen.

Abmessungen

BR31_MA_01_00004
Leuchtdrucktaste



Einbauöffnungen

Montage

Einbauöffnung Ø 16 mm
Bauform erhabener Einbau

Front

Frontform rund
Frontabmessung Ø 18 mm

Allgemeine Attribute

Gewicht 0.007 kg

IP-Schutzart

Frontschutzart IP 40

Anschlussart

Anschluss Universal 2.0 x 0.5 mm

Vorsatz


Schaltfunktion I

Schaltelement


Schaltsystem Low-Level
Kontakte 2 Ö
Schaltspannung 42 V AC/DC
Schaltstrom 0.1 A
Kontaktmaterial Gold

Funktion


Leuchtdrucktaste



Schaltschema



Bauteillayout

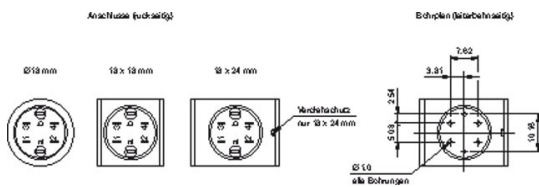

Bauteillayout



EAO – Your Expert Partner for
Human Machine Interfaces

31-432.036 - Leuchtdrucktasten-Vorsatz

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Illuminated Pushbutton Switches](#) category:

Click to view products by [EAO](#) manufacturer:

Other Similar products are found below :

[95-313.000](#) [95-414.000](#) [95-900.005](#) [PV3H2B0NN-341](#) [A165L-AGA-T1-2](#) [A30NZ-MNM-TGA](#) [A3AA-91K1-00EG](#) [A3PA-5702-24E](#) [A3U-TMW-A2C-5M](#) [14-030.005](#) [14-271.025](#) [14-132.025](#) [MS3470L12-3SY L/C](#) [MS3470L22-55SZ L/C](#) [18-257.035](#) [18-287.035](#) [19-050.005](#) [19-139.035](#) [19-159.015](#) [19-471.035](#) [IPR3SAD1L0Y](#) [22-212.011](#) [22-223.011](#) [95-900.009](#) [A017101](#) [A165L-JRM-T1-2](#) [A30NZ-MNM-TYA](#) [A3AT-90K1-00EG](#) [A3AT-90K1-00ER](#) [A3PA-5701-12E](#) [A3SA-90D1-28W](#) [18-187.035](#) [19-031.005](#) [19-451.035](#) [22-225.011](#) [PV3H2B0NN-305](#) [31-426.036](#) [31-455.036](#) [31-463.036](#) [3FTH98020](#) [D38999/24WJ24HN](#) [51-131.022](#) [31-051.006](#) [IPR3SAD2LSG](#) [41-461.036](#) [51-265.0](#) [51-455.036](#) [51-463.036](#) [02-617.011](#) [02-618.011](#)