

HR and HM

1/4" x various length and SFE in-line fuse holder



Product features

- Bayonet type knob
- Maximum current rating 20 amps; voltage rating 32 volts AC
- Holders available as complete assembly consisting of in-line holder with 8" or 14" of #14 insulated wire and installed fuses
- Replacement springs – BK/1A1853
- Replacement contacts – 9838 for #18 - #22 wire, 9841 for #12 - #16 wire

Environmental data:

Temperature Rating (RTI): +140 °C

Agency information:

No agency listing

Part Number	Amps	Volts AC	Includes Fuse	Wire
HRJ*	20	32	SFE-20	19" of #14
HRI			SFE-14	
HRH			SFE-9	
HRE			SFE-7½	
HRG			SFE-6	
HRF			SFE-4	
HMJ**			SFE-20	8" of #14
HMI			SFE-14	
HMH			SFE-9	
HME			SFE-7½	
HMG	SFE-6			
HMF	SFE-4			

*Also available as in-line fuseholder only with lead wire contacts, HRJ-Less-Fuse.

**Also available as in-line fuseholder only with lead wire contacts, HMJ-Less-Fuse.

HDJ-A – For ¼" x 1¼" fuse, no wire or fuse included, accepts #18 - #20 wire.


HDJ-B – For ¼" x 1¼" fuse, no wire or fuse included, accepts #12 - #16 wire.

HDI-A – For ¼" x 7/8" fuse, no wire or fuse included, accepts #18 - #20 wire.

HDI-B – For ¼" x 7/8" fuse, no wire or fuse included, accepts #12 - #16 wire.

HAF-A – For ¼" x 5/8" fuse, no wire or fuse included, accepts #18 - #20 wire.

Dimensions: in (mm): All dimensions ±0.015"

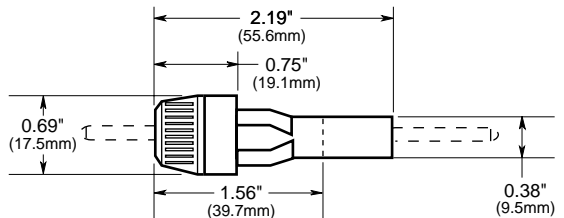

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
www.eaton.com/electronics

© 2017 Eaton
All Rights Reserved
Printed in USA
Publication No. 2122 SB98107
June 2017

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fuse Holder](#) category:

Click to view products by [Eaton](#) manufacturer:

Other Similar products are found below :

[570-290-741P40](#) [570-290-751P40](#) [0031.1351.01](#) [020417G](#) [020418E](#) [80910030](#) [8601.2020](#) [9-3557-GP REV A](#) [15600-08-10](#) [BK1-HTC-45M](#)
[BK/FHN19G](#) [BK/HJM-HH](#) [BK/HKP-CCHH](#) [BK/HKP-E-CC](#) [BK/HKP-E-HH](#) [BK/HKP-EH-HH](#) [BK/HKP-U-HH](#) [BK/HTJ-LES-FUSE](#)
[HMG-241](#) [2086-1](#) [2193](#) [RTMF-SC](#) [2602](#) [2650](#) [FHN31G1](#) [G4PB8](#) [2660](#) [2799](#) [CQ-209V](#) [345621A](#) [3794](#) [4202](#) [4408](#) [4413](#) [4423](#) [4482](#)
[4532](#) [4537](#) [TSD1404-12](#) [BK/FHN31G1](#) [BK/HKP-H-CC](#) [BK/HKP-JQ-BB](#) [BK/HKP-JQW-BB](#) [BK/HKP-N-HH](#) [BK/HKP-S-CC](#) [BK/HKP-W-](#)
[BBHH](#) [BP/HHS](#) [BPHHU](#) [55900008011](#) [C1933](#)