




FRONT VIEW




TOP VIEW



RECOMMENDED PCB LAYOUT

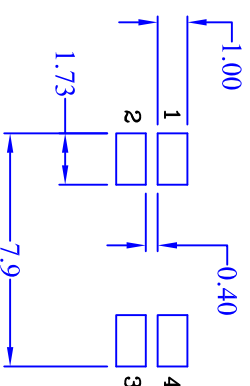


BOTTOM VIEW

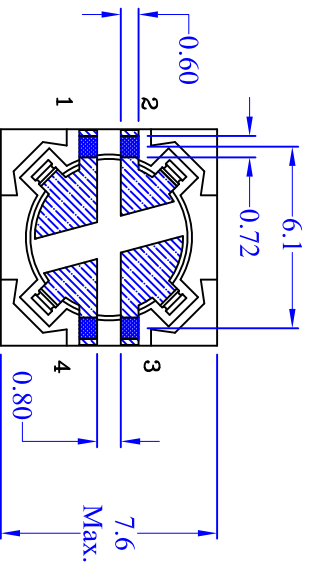

ELECTRICAL CHARACTERISTICS

OCL @ 100KHz, 0.25Vrms & 0.0ADC. Pins (1 - 3) = 7.9 - 11.9 uH.
 OCL @ 100KHz, 0.250Vrms & 3.17 ADC. Pins (1 - 3) = 5.53 uH min.
 SCL @ 100KHz, 0.250Vrms & 0.0 ADC. Pins (1 - 3) with (3 - 4) shorted = 470 nH Max.
 DCR @ 20°C, pins (1 - 3) = 0.0978 Ω max.
 DCR @ 20°C, pins (2 - 4) = 1.65 Ω max.
 Turns ratio: pins (1 - 3):(2 - 4). 1.0:4.0 ± 3%.
 Hipot @ 500VAC for 1 second, pin 1 to pin 4.

SCHEMATIC

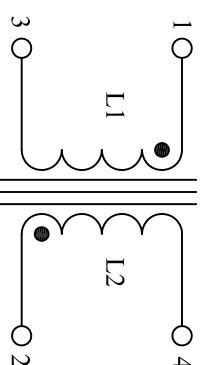

Notes:

- 1) All Dimensions are in millimeters unless otherwise specified.
- 2) All soldering surfaces to be coplanar within 0.10 millimeters.
- 3) Marking: "18714" (Last 5 digits of part number); Date Code: wwww = week/year; R = Latest Print Revision
- 4) PCB tolerances are +/- 0.2mm unless stated otherwise.
- 5) RoHS compliant.
- 6) Two layers of mylar tape is placed around the core before the tabs are bent.

Cooper Electronic Technologies

1225 Broken Sound Parkway NW Suite F, Boca Raton, FL 33487

Transformer

1-4

10 uH @ 3.17A peak

Shielded Drum Core, SMT, 4.35mm HT

Size Drawing Number: CTX02-18714-R

A Revision Level: X1 Sheet 3 of 6

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pulse Transformers](#) category:

Click to view products by [Eaton](#) manufacturer:

Other Similar products are found below :

[E4001NLT](#) [1879401-1](#) [IF-18-0269-N](#) [T1042NLT](#) [T1049NL](#) [PE-68023NL](#) [PH0905NL](#) [PT4163S](#) [PT5010](#) [PA0173NLT](#) [CTX02-14608](#) [PE-65457NLT](#) [T60403-D4721-X088](#) [H1183NLT](#) [CTX33-18971-R](#) [HM2108NLT](#) [HM0068ANLT](#) [PG1427.001NLT](#) [750031353](#)
[PH9400.566NLT](#) [PH9400.655ANLT](#) [PH9400.655NLT](#) [PH9385.013NLT](#) [B78307X0001](#) [B78307A2276A003](#) [HX6096FNL](#) [HX6106NLT](#)
[P0926NL](#) [HX6096NL](#) [PA3493NLT](#) [P0585ANL](#) [HU4102NL](#) [PH9385.012NLT](#) [PH9400.111NLT](#) [PH9400.211NLT](#) [PH9400.233ANLT](#)
[SMQC1553-6](#) [78615/9JC-R](#) [SMQ1553-45](#) [Q1553-45](#) [Q1553-22](#) [Q1553-21](#) [PH9400.211ANLT](#) [TGM-050P3RL](#) [TGMS-1464V6LF](#) [TGRAD-560V8LF](#) [TGMR-360V6LF](#) [P0544](#) [PA0264NLT](#) [T60403-D4215-X014](#)