
Bussmann

Semiconductor Fuse 35-100A 700-1200A 700 Volts



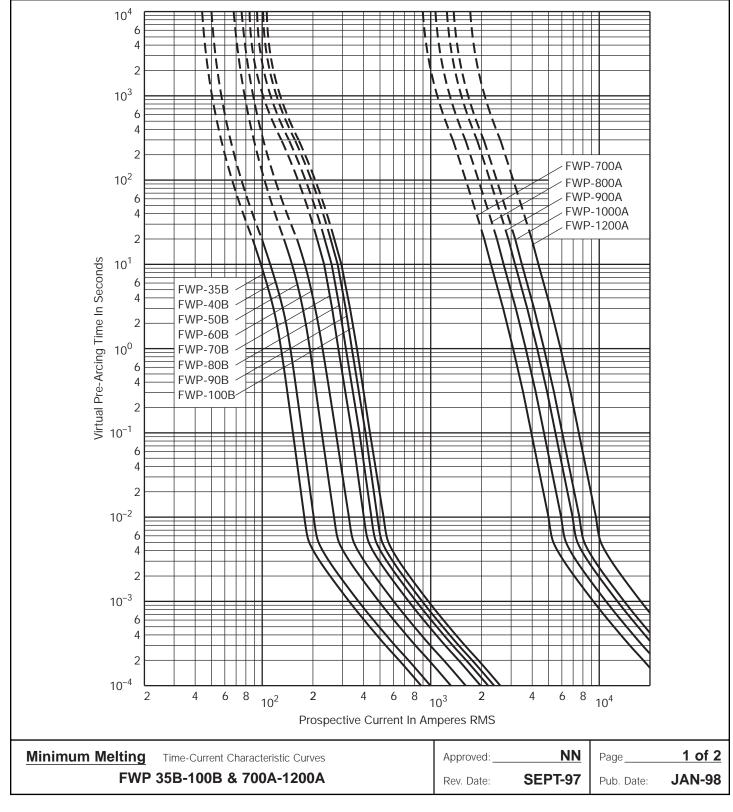

COOPER Bussmann 7-11-01 SB01191 BUSSMANN P.O. Box 14460 St. Louis, MO 63178-4460 U.S.A. Phone: 314-394-2877 Fax: 800-544-2570 Int'I Fax: 314-527-1413 BUSSMANN U.K. Burton-on-the-Wolds Leicestershire LE12 5TH England Phone: 44-1509-882737 Fax: 44-1509-882786

## **BUSSMANN DENMARK**


5 Literbuen DK-2740 Skovlunde Copenhagen, Denmark Phone: 45-4485-0900 Fax: 45-4485-0901

Size



**Semiconductor Fuse** 35-100A 700 Volts 700-1200A

**BIF** Document 35785308

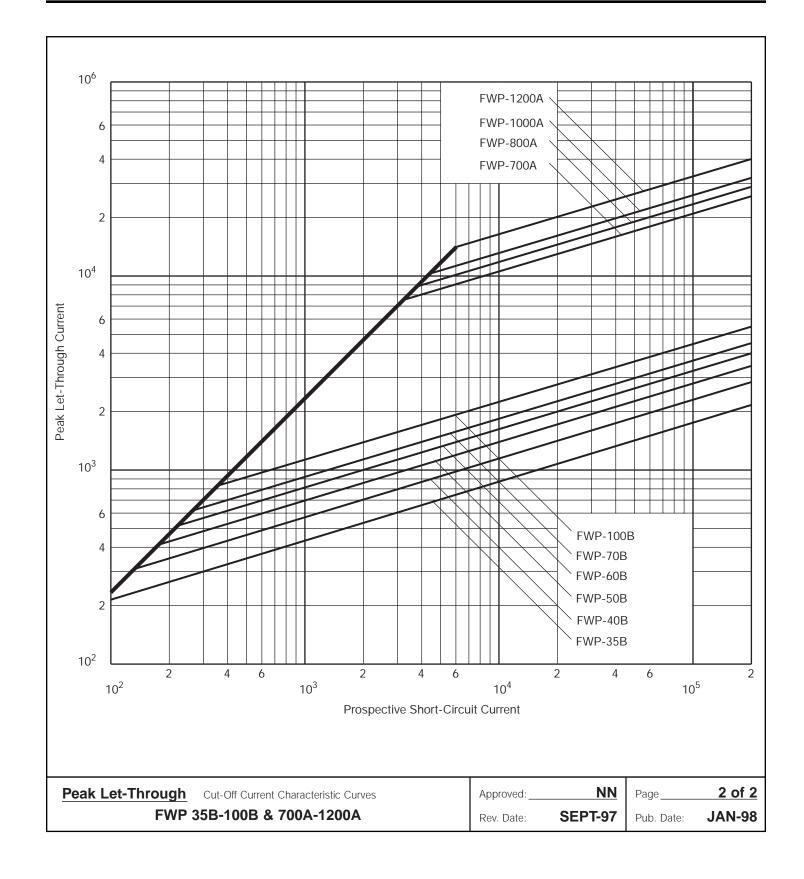



The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Specialty Fuses category:

Click to view products by Eaton manufacturer:

Other Similar products are found below :

ECF-1 ECF-1/2 ECF-2 ECF-3 ECF-4 170M1418 N-2-1/2 N-3-2/10 S-2 2D16 170M1564D 170M4241 ABS-25 ABS-30 ABS-8 FWP-25A14FI FWP-80A22FI 30CIF06 TJD TPL-BL KAB-25 KLC40 WKV 10D27 NITD25 04450080FX850 NITD16 ECF-5 TDC180-10 TPM-25 170M3509 DEO200 004117001 45ET 170M5810D 10H07C SDL-2 CC12M10A TDC600-2-R CBW57-ES-7A-5H CBW57-HB-15A-P CBW57-PS-15A-5X CBW58-HL4-30A-5C CBW58-HS-15A-5C CBW58-HS-20A-5C 0AALBK300-BA 170M8211 STD2 STD4 4D27FB