

# HR and HM

## 1/4" x various length and SFE in-line fuse holder



**Product features**

- Bayonet type knob
- Maximum current rating 20 amps; voltage rating 32 volts AC
- Holders available as complete assembly consisting of in-line holder with 8" or 14" of #14 insulated wire and installed fuses
- Replacement springs – BK/1A1853
- Replacement contacts – 9838 for #18 - #22 wire, 9841 for #12 - #16 wire

**Environmental data:**

Temperature Rating (RTI): +140 °C

**Agency information:**

No agency listing

Part Number	Amps	Volts AC	Includes Fuse	Wire
HRJ*	20	32	SFE-20	19" of #14
HRI			SFE-14	
HRH			SFE-9	
HRE			SFE-7½	
HRG			SFE-6	
HRF			SFE-4	
HMJ**			SFE-20	8" of #14
HMI			SFE-14	
HMH			SFE-9	
HME			SFE-7½	
HMG	SFE-6			
HMF	SFE-4			

\*Also available as in-line fuseholder only with lead wire contacts, HRJ-Less-Fuse.

\*\*Also available as in-line fuseholder only with lead wire contacts, HMJ-Less-Fuse.

HDJ-A – For ¼" x 1¼" fuse, no wire or fuse included, accepts #18 - #20 wire.


HDJ-B – For ¼" x 1¼" fuse, no wire or fuse included, accepts #12 - #16 wire.

HDI-A – For ¼" x 7/8" fuse, no wire or fuse included, accepts #18 - #20 wire.

HDI-B – For ¼" x 7/8" fuse, no wire or fuse included, accepts #12 - #16 wire.

HAF-A – For ¼" x 5/8" fuse, no wire or fuse included, accepts #18 - #20 wire.

**Dimensions: in (mm):** All dimensions ±0.015"

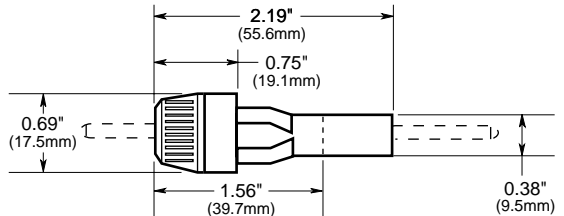

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

**Eaton**  
**Electronics Division**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
www.eaton.com/electronics

© 2017 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 2122 SB98107  
June 2017

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Current Sense Resistors - SMD category](#):*

*Click to view products by [Eaton manufacturer](#):*

Other Similar products are found below :

[5112](#) [65709-330JE](#) [PF2512FKF7W0R007L](#) [PR2512FKF7W0R003L](#) [PR2512FKF7W0R005L](#) [RCWL0603R500JNEA](#) [ERJ-3BQF1R1V](#) [ERJ-L14UJ42MU](#) [2-2176088-5](#) [PF2512FKF7W0R006L](#) [PF2512FKF7W0R033L](#) [2-2176089-4](#) [CD2015FC-0.10-1%](#) [PR2512FKF7W0R004L](#) [CGSSL1R01J](#) [CGSSL1R047J](#) [RC1005F124CS](#) [RCWE2512R110FKEA](#) [RCWL0805R330JNEA](#) [RL73H3AR47FTE](#) [RL73K3AR56JTDF](#) [RL7520WT-R001-F](#) [RL7520WT-R009-G](#) [RL7520WT-R020-F](#) [RLP73N1ER43JTD](#) [TL3AR01FTDG](#) [TLR3A20DR0005FTDG](#) [LRC-LR2512LF-01-R820J](#) [ERJ-3BQF4R3V](#) [ERJ-L14UF68MU](#) [TLR3A20DR001FTDG](#) [TLR3A30ER0005FTDG](#) [WR06X104JGLJ](#) [RLP73K1ER82JTD](#) [TL2BR01F](#) [TLR3A20DR01FTDG](#) [WSR3R0600FEA32](#) [ERJ-14BQF1R6U](#) [ERJ-14BQJR30U](#) [SP1220RJT](#) [SP1R12J](#) [ERJ-14BQF6R2U](#) [RL7520WT-R039-G](#) [PF1206FRF7W0R02L](#) [RL7520WT-R002-F](#) [RL7520WT-R047-F](#) [RLP73N2BR068FTDF](#) [RL7520WT-R005-F](#) [RCWE2512R220FKEA](#) [RCWE120625L0FMEA](#)