


British Plug Top Fuse Fast-Acting

TDC600



Dimensional Data

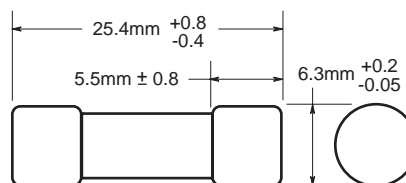

Catalog Symbol: TDC600

Fast-Acting, High Breaking Capacity Fuse

600 Volts AC

BS1362, UL Recognized

Electrical Ratings (Catalog Symbol and Amperes)

600 Volts

TDC600-2A

TDC600-10A


Rated Current	Rated Voltage (V)	Breaking Capacity	Power Dissipation (W)	Color	Approvals
2A	600	200A, 600V	1 Watt	Blue	Asta, BSI
10A		10kA, 250V p.f. 0.7 - 0.8	@ Rated Current		

- **Type TDC600.**
- 1/4" x 1" fast-acting, high breaking capacity fuse.
- Ceramic tube - end caps: silver-plated copper.
- Packaging: x 10, x 100, x 1000.
- Weight: 2.5g.

Limits for Pre-arcing Time

In	1.0 In.	1.6 In.	1.9 In.
	MIN	MIN	MAX
2A, 10A	1000 hours	30 min.	30 min.

Time-Current Characteristic Curves Average Melt (Full Size Curves Available)

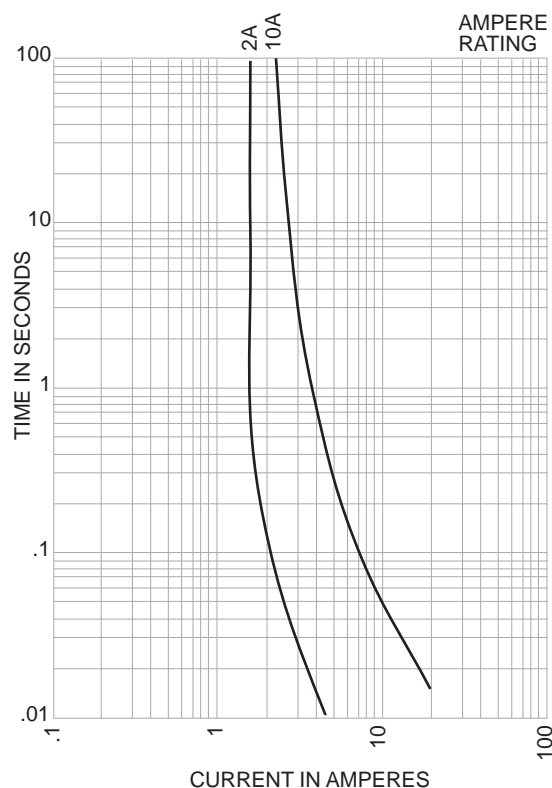

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this Data Sheet is are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Specialty Fuses](#) category:

Click to view products by [Eaton](#) manufacturer:

Other Similar products are found below :

[63NZ02GL](#) [714125](#) [722134](#) [F02A-4AS](#) [F02B-1A](#) [80NH00GR-6](#) [FWH-200A](#) [FWP-32A14F](#) [12LCT](#) [12TDLSJ63](#) [REN-3](#) [15.5CAVH2E](#)
[ECF-1](#) [ECF-2](#) [ECF-3](#) [ECF-4](#) [170M0213](#) [170M1369-D](#) [170M3809D](#) [BK/F02B-1A](#) [N-2-1/2](#) [N-3-2/10](#) [NITD2](#) [20D16](#) [KAA-3](#) [KAB-30](#)
[KAW-3](#) [2D16](#) [LKN-125B](#) [16D27SB](#) [16FC](#) [170M1564D](#) [170M2616](#) [170M2668](#) [170M4161](#) [170M4241](#) [170M4699](#) [ESD63](#) [ABS-30](#) [ABS-8](#)
[ACF-15](#) [ACF-30](#) [ACO-30](#) [F02A-10A](#) [SSD10](#) [200NH1M](#) [FWP-25A14FI](#) [FWP-40A14FI](#) [FWP-500A](#) [FWP-63A22FI](#)