



QR06 Series

Crossflow Blower


455... 495mm x Ø 88mm 19" Rack Mount Unit

- AC blower with single phase motor. 90° air flow. Ball bearings and terminals. Max ambient temperature of 60 C.
- Fan propeller of aluminium and air duct housing of sheet steel.
- Rotational direction CW looking at rotor.
- Wide, even air flow distribution. "V" shaped guide vane suppresses noise.
- UL, CSA, VDE approvals on some models. Please contact application engineering


19" Rack Mount Unit (Ready for installation) Shipped complete with:

- Capacitor prewired to terminal block
- Filter mat and retainer included
- Front plate and motor painted black

Part Number	CFM @ 0	Curve	Volts	Hertz	Power (W)	dBa	Max Ambient Temp C	Wgt. (lbs)	Type Of Bearing	Features	Capacitor (µF)
QR06A-2/106349	190	1	115	50/60	38	55	40	6.00	Ball	Leads	3
QR06A-2/106351	190	1	115	50/60	38	55	40	6.00	Ball	Leads	3
QR06A-2/106350	190	1	230	50/60	41	55	40	6.00	Ball	Leads	1
QR06A-2/106352	190	1	230	50/60	41	55	40	6.00	Ball	Leads	1

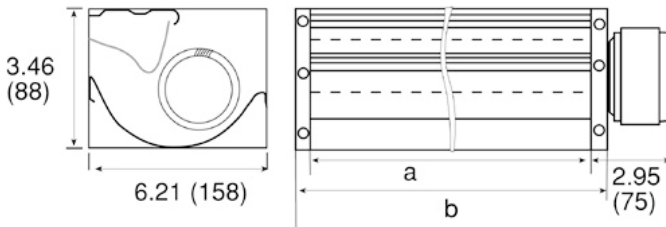

PART NUMBER	a	b
QR08A-2/106349	14.96 (380)	18.11 (460)
QR08B-2/106350	14.96 (380)	18.11 (460)
QR08B-2/106351	16.54 (420)	19.69 (500)
QR08B-2/106352	16.54 (420)	19.69 (500)

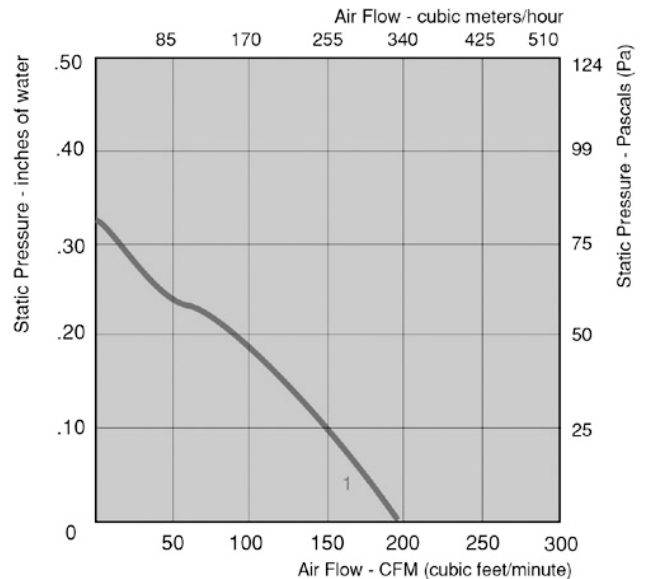

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ebm papst](#) manufacturer:

Other Similar products are found below :

[3312M](#) [M4Q045-DA05-E4](#) [4114N](#) [8218J/2H3](#) [W1G200-EA95-68](#) [DV6248U](#) [6224NT](#) [M4Q045-CA03-75](#) [M4Q045-CF01-75](#) [D2E133-DM27-D8](#) [8314S](#) [8506A](#) [G2E140-AL30-48](#) [R1G225-AG15-11](#) [R2D270-AB12-09](#) [R2E190-RA50-21](#) [R2E225-BD40-21](#) [R3G310-AL09-30](#) [R4E400-AP15-10](#) [REF100-11/14](#) [RER160-28/56S](#) [9496-2-4039-1](#) [A2D240-AA02-10](#) [A2D250-AA06-52](#) [G2E120-FV56-16](#) [G2E160-AY47-57](#) [G2S085-AA19-15](#) [QR06A-2/106349](#) [R1G250-AQ21-52](#) [R2E180CH0312](#) [R2E225-BD92-36](#) [R3G175-AF25-02](#) [LZ27](#) [RG125-19/12N/2](#) [RH31M-6/104372](#) [RH56M-6/204689](#) [3800](#) [RLF100-11/18](#) [D1G133-DC17-52](#) [D2E097-BI56-48](#) [55416.30320](#) [3314U](#) [D4E180-BA04-18](#) [4112NHH](#) [412/2H-048](#) [412FH-132](#) [W2E300-CP02-37](#) [W2G110-AK43-83](#) [W4D350-CA06-14](#) [422JM](#)