



**UNIVERSAL** : Choice of six voltages.

**PRACTICAL** : ON/OFF switch.

- Power-on indicator.

**PROTECTED** : Short circuit protection.


**RESISTANT TO SHOCK** : Polycarbonate case



## 12 WATTS

3 / 4,5 / 6 / 7,5 / 9 or 12V

1A

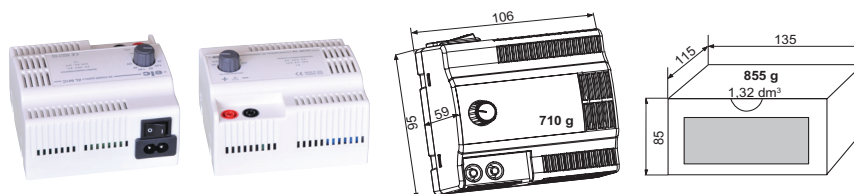

## Specifications

### Voltage

- Floating outputs on 4 mm safety sockets.
- Output voltage : 3 V or 4,5 V or 6 V or 7,5 V or 9 V or 12 V selectable
- Accuracy :  $\pm 4\%$ .
- Regulation : < 20mV for a load variation from 0 to 100%.  
< 15mV for a 10% line variation.
- Ripple : 5 mV peak to peak or 1,8 mV rms.
- Internal resistance : < 20 m $\Omega$ .

### Current

- The max current is constant and independent of the selected output.
- Max I : 1 A.

### Indicator

- Green power-on LED indicator.

### Protection

- Short circuit protection, by current limit.
- Transformer primary overcurrent protection, by fuse.

## Other specifications

- Safety : Class II - Safety Extra Low Voltage (SELV) output  
Complies with EN 61010-1, overvoltage category II, pollution degree 2.
- EMC : Complies with EN 61326-1, performance criteria B, and EN 55011, ISM Group I, Class B.
- Input voltage : 230V  $\pm 10\%$ , 50 / 60 Hz.
- Mains input : C8 socket with CEI320 C7 removable cable [2 poles double insulation].
- ON/OFF control : toggle switch.
- Power consumption : 30 VA max.
- Dielectric strength : 3000Vac from input to output.
- Presentation : Polycarbonate case screen-printed.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bench Top Power Supplies](#) category:*

*Click to view products by [ELC](#) manufacturer:*

Other Similar products are found below :

[NL200](#) [PR20](#) [ZUPNC403](#) [Z60-7-L-U](#) [ZUPNC402](#) [GDM-8342](#) [GPIB](#) [PSW 250-4.5](#) [CPX200DP](#) [AX-8450A](#) [TPM-3003](#) [HMP2020](#)  
[HMP2030](#) [HMP4040](#) [1320](#) [1350](#) [UT804](#) [1405](#) [1410](#) [1513](#) [1514](#) [1513](#) [1550](#) [1651A](#) [1665](#) [1666](#) [1667](#) [SDP-2405-000G](#) [1673](#) [1693](#) [1694](#)  
[MX100TP](#) [1737](#) [1739](#) [1762](#) [1788](#) [TPM-3005](#) [1900](#) [1902B](#) [9174B](#) [GDM-8245](#) [GDM-8255A](#) [GDM-8341](#) [PSW 160-7.2](#) [PSW 30-36](#) [PSW](#)  
[80-13.5](#) [Z10-20-LAN-U](#) [PSW 30-72](#) [QL355P SII](#) [Z36-6-LAN-U](#) [HCS-3400-USB](#)