

Swivel clamp connector joints

Aluminium

SPECIFICATION

Identification No.

No. **2**: with 2 Stainless Steel-Clamping screws DIN 912

Aluminium

plastic coated
black RAL 9005, textured finish **SW**

blank **BL**
matt shot-blasted

Clamping bore mechanically machined

Socket cap screws DIN 912
Stainless Steel AISI 304

Hexagon nuts DIN 985
Stainless Steel AISI 304

INFORMATION

GN 281 swivel clamp connector joints are an assembly of the swivel clamp connectors GN 271 (see page 1847) and GN 275 (see page 1854).

The clamping bore is mechanically machined and designed for construction tubes GN 990 (see page 1902) or DIN 2391, DIN 2395 and DIN 2462 respectively.


The standard version of the clamping screws are socket cap screws with hexagonal socket DIN 912. They can be replaced by adjustable clamping levers GN 911 (see page 1874) (see table of dimensions).

ACCESSORY

- Clamping kits GN 911 (see page 1874)

TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)

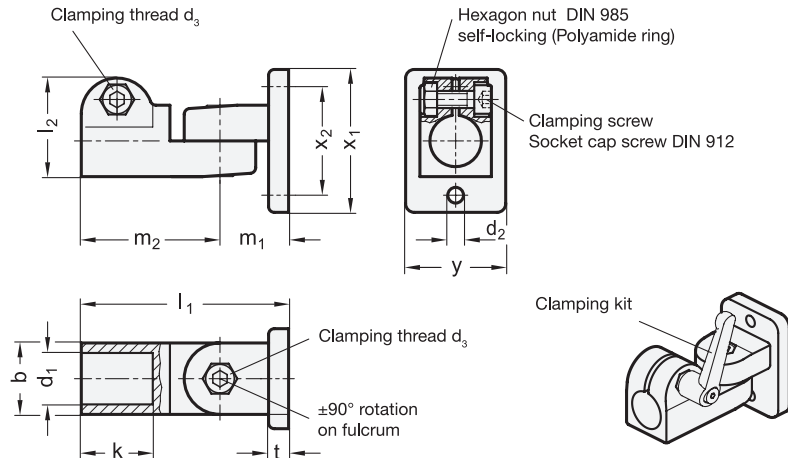

GN 281

Description	d1	b	d2	d3	k	l1	l2	m1	m2	t	x1	x2	y	Clamping kits for d3	△
GN 281-B12-2-BL	B 12	25	5.5	M 6	25	72.5	34.5	24	48.5	7	50	38	35	GN 911-M6-22	126
GN 281-B12-2-SW	B 12	25	5.5	M 6	25	72.5	34.5	24	48.5	7	50	38	35	GN 911-M6-22	126
GN 281-B14-2-BL	B 14	25	5.5	M 6	25	72.5	34.5	24	48.5	7	50	38	35	GN 911-M6-22	122
GN 281-B14-2-SW	B 14	25	5.5	M 6	25	72.5	34.5	24	48.5	7	50	38	35	GN 911-M6-22	122
GN 281-B16-2-BL	B 16	25	5.5	M 6	25	72.5	34.5	24	48.5	7	50	38	35	GN 911-M6-22	120
GN 281-B16-2-SW	B 16	25	5.5	M 6	25	72.5	34.5	24	48.5	7	50	38	35	GN 911-M6-22	120
GN 281-B18-2-BL	B 18	25	5.5	M 6	25	72.5	34.5	24	48.5	7	50	38	35	GN 911-M6-22	116
GN 281-B18-2-SW	B 18	25	5.5	M 6	25	72.5	34.5	24	48.5	7	50	38	35	GN 911-M6-22	116



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Conduit Fittings & Accessories](#) category:

Click to view products by [Elesa & Ganter](#) manufacturer:

Other Similar products are found below :

[M3231GAB](#) [M3231GAC](#) [M3231GAE](#) [M3231GL](#) [M3231GN](#) [M3231GT](#) [VC-937-16/RED](#) [VC-1125-16/RED](#) [DM0240-1/2A](#) [3408B](#) [G6002](#)
[M4340GAE](#) [C2016-P](#) [C2012-P](#) [3407B](#) [1660-P](#) [561-87BG11BLK](#) [561-75BG11B](#) [1.511.1601.14](#) [1.533.1201.50](#) [1.533.1601.51](#) [1.533.2001.51](#)
[1.533.4001.50](#) [1.533.5001.50](#) [BVNV-P428](#) [BVBV-P366](#) [2276](#) [2663-P](#) [3405B](#) [C2070-P](#) [3582V](#) [2643-P](#) [4975](#) [2644-P](#) [2955](#) [M50](#) [2404-P](#)
[C2008-P](#) [2723-P](#) [2291](#) [2133-P](#) [3048F](#) [VC12516](#) [RC156-0500](#) [DM0523-1/2A](#) [1035A](#) [DMS0250-1A](#) [DMS0313-1A](#) [1040A](#) [1050A](#) [R1/8A](#)