


## MA140/MA145 True RMS 300A Mini Clamp Meters + NCV

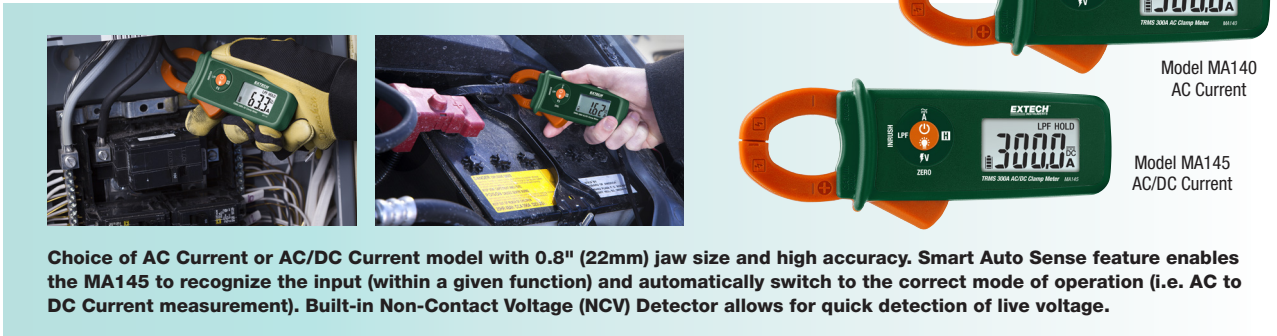

Choice of AC Current or AC/DC Current model with 0.8" (22mm) jaw size and high accuracy. Smart Auto Sense feature enables the MA145 to recognize the input (within a given function) and automatically switch to the correct mode of operation (i.e. AC to DC Current measurement). Built-in Non-Contact Voltage (NCV) Detector allows for quick detection of live voltage.

### Features

- True RMS for accurate readings of noisy, distorted or non-sinusoidal waveforms
- **Model MA140** — AC Current  
**Model MA145** — AC/DC Current and Zero function for accurate DC measurements
- Compact 0.8" (22mm) jaw size accommodates conductors up to 300MCM and allows measurements in tight locations
- Unique Smart Auto Sense feature
- Low Pass Filter (LPF) for accurate measurement of variable frequency drive signals
- Built-in Non-Contact Voltage (NCV) detector
- Inrush current measurement
- 6000 count backlit LCD display
- Smart Data Hold: Audiovisual alert when a new reading exceeds 50 digits of a held reading
- Low battery indicator and Auto Power Off feature
- CAT III-600V safety rating
- Complete with carrying case and two LR44 batteries

Specifications	MA140	MA145
AC Current (max resolution)	60A, 300A (0.01A)	60A, 300A (0.01A)
DC Current (max resolution)	—	60A, 300A (0.01A)
Basic accuracy	±2.0%	AC: ±1.5%, DC: ±1.5%
Non-Contact Voltage (NCV)	80 to 600V	80 to 600V
Dimensions	5.8x2.4x1.2" (147x60x31mm)	5.8x2.4x1.2" (147x60x31mm)
Weight	4.9oz (140g)	4.9oz (140g)

### Ordering

MA140 **N** ..... True RMS 300A AC Mini Clamp Meter+NCV  
 MA145 **N** ..... True RMS 300A AC/DC Mini Clamp Meter+NCV

**N** Indicates products that are available with optional calibration traceable to NIST. Order with -NIST after part number for product plus Calibration Certificate.



MA140 UPC Code: 793950371404  
 MA145 UPC Code: 793950371459

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Clamp Multimeters & Accessories](#) category:*

*Click to view products by [Extech](#) manufacturer:*

Other Similar products are found below :

[FLUKE 1630-2](#) [ZAPDUMOD-03](#) [ZARKMS-01-99](#) [UT233](#) [TESTO 770-3](#) [0590 7703](#) [AX-3550](#) [AX-M266C](#) [BM079](#) [BM089](#) [BM157](#)  
[BM162](#) [BM197](#) [KEW2210R](#) [FLUKE 80I-110S](#) [FLUKE A3002FC](#) [FLUKE I200](#) [FLUKE I200S](#) [FLUKE I3000FLEX-24](#) [FLUKE I310S](#)  
[CIE600](#) [TESTO 770-2](#) [0590 7702](#) [34194A](#) [KEW2433R](#) [KEW8112](#) [FLUKE 772](#) [380976-K](#) [MA3110](#) [MA440](#) [MA443](#) [MA445](#) [FLUKE-374](#)  
[FC](#) [TA74](#) [AMP-320](#) [CM55](#) [CM46](#) [I200](#) [ACD-6 PRO](#) [FLUKE-1630-2FC](#) [CM44](#) [CM42](#) [FLK-A3000 FC](#) [FLUKE-376 FC](#) [MA610](#) [EA30-](#)  
[NIST](#) [F201](#) [F205](#) [MA193 \(250 MM\)](#) [DIGIFLEX 4000A 350MM](#) [DIGIFLEX 400A 170MM](#) [DIGIFLEX 400A 250MM](#)