

PH210 Compact pH/ORP/Temperature Meter



Compact handheld meter displays pH or mV and Temperature simultaneously. It uses a standard pH or ORP electrode with BNC connector and has Automatic Temperature Compensation (ATC) when used with optional Temperature Probe.

Applications:

- Laboratory chemical solution testing
- Waste Water and Drinking Water Analysis
- Aquariums
- Beverage Manufacturing
- Fish Hatcheries
- Food Processing
- Photography Labs



Features

- Displays pH or mV (ORP) and Temperature simultaneously
- BNC input accepts standard pH or ORP electrodes (sold separately)
- Manual or Automatic Temperature Compensation (via optional Temperature Probe)
- Automatic 3-point calibration (4, 7, and 10pH)
- Data Hold and Min/Max
- Auto Power Off with disable feature
- Complete with 9V battery and soft case (pH, ORP and Temperature Probes sold separately)

Specifications


pH	0.00 to 14.00pH
mV (ORP)	-1999 to 1999mV
Temperature (manual)	32 to 212°F/0 to 100°C
Temperature (ATC)	32 to 140°F/0 to 60°C (dependent on Temperature probe)
Resolution	0.01pH, 1mV, 0.1°F/°C
Accuracy	±0.04pH, ±0.5% mV, ±1.5°F/±0.8°C
Dimensions	5.3 x 2.4 x 1.3" (135 x 60 x 33mm)
Weight	7oz (200g)

Ordering

PH210..... pH/ORP/Temperature Meter (Meter only)

Accessories

- 60120B..... Mini pH Electrode (10 x 120mm)
- 601500..... Standard pH Electrode (12 x 160mm)
- 601100..... Flat Surface pH Electrode (15 x 106mm)
- 67500B..... ORP Electrode (13 x 154mm)
- 850188..... Temperature Probe, Stainless Steel (32 to 149°F/0 to 65°C)
- PH103..... Tripak Buffer pouches (6 ea: 4, 7, 10pH, w Rinse solutions)

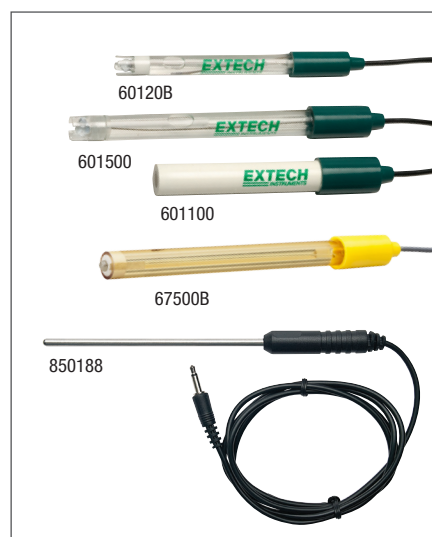

Optional electrodes and Temperature probe



UPC Code: 793950152102

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Extech](#) manufacturer:

Other Similar products are found below :

[PT400](#) [LT45](#) [EX365](#) [MO260](#) [MO280](#) [871515](#) [PH105](#) [PH113](#) [HD350](#) [HD700](#) [RH300-CAL](#) [140000](#) [AN300](#) [AN-P1](#) [149116](#) [149118](#) [DV40](#)
[EA11A](#) [BT100](#) [SD800](#) [SDL600](#) [EX363](#) [EX505](#) [SW810A](#) [AN200](#) [AN320](#) [PH110](#) [PH220](#) [PRC15](#) [PRC30](#) [PRT200](#) [PT-30](#) [HD500](#) [RH490](#)
[RH522](#) [380395](#) [380941](#) [380975](#) [MA1500](#) [MA3010](#) [407026](#) [407736](#) [412300](#) [42275](#) [42540](#) [TL726](#) [TL807C](#) [44550](#) [45118](#) [HW30](#)