

U Cores (9277024002)



Part Number: 9277024002

77 U CORE

Explanation of Part Numbers: Digits 1&2 = product class, 3&4 = material grade.

The U core offers an economical core design with a nearly uniform cross-sectional area. In a power ferrite material they are frequently used in output chokes, power input filters and transformers for switched-mode power supplies and HF fluorescent ballasts.

For any U core requirement not listed in the catalog, please contact our customer service group for availability and pricing.

[Catalog Drawing](#)
[3D Model](#)

Weight indicated is per pair or set.

Weight: 35 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	31.4	±0.60	1.236	-
B	18.5	±0.15	0.729	-
C	10.25	-0.25	0.394	-
D	9.4	Min	0.371	Min
E	12.5	Min	0.493	Min
F	26.6	±0.50	1.047	-

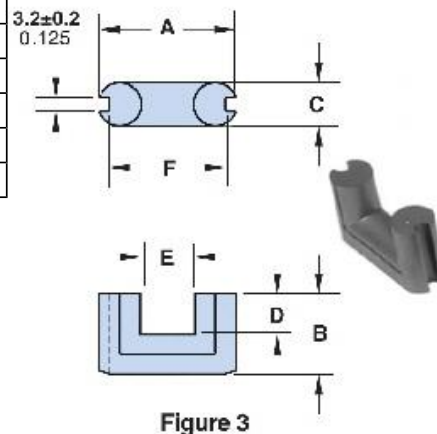



Figure 3

Chart Legend

•An I core, 9377024002, is available for these U cores. See I Core Section of our catalog.

$\Sigma l / A$: Core Constant, l_e : Effective Path Length, A_e : Effective Cross- Sectional Area, V_e : Effective Core Volume

A_L : Inductance Factor 

Electrical Properties	
A_L (nH)	1425 Min
A_e (cm ²)	0.83
$\Sigma l / A$ (cm ⁻¹)	11.2
l_e (cm)	9.3
V_e (cm ³)	7.7

A_L value is measured at 1kHz, < 10 gauss.

These U cores have the same minimum cross-sectional area as the listed effective cross-sectional area.

Fair- Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • [\[email protected\]](#) • www.fair-rite.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ferrite Cable Cores](#) category:

Click to view products by [Fair-Rite](#) manufacturer:

Other Similar products are found below :

[FB73-422](#) [FX28R0984-0](#) [FX28R0984-2](#) [AB 3X2X3SM](#) [2643164251](#) [2643665709](#) [2661626402](#) [LB 2.8X4.5U](#) [28R1127](#) [28R1260](#) [28R1575](#)
[SM28R0760](#) [2631006302](#) [2643165451](#) [2643178351](#) [28R0760](#) [4327 030 11761](#) [SS7X4X3W](#) [4327 030 16141](#) [2643103102](#) [2643164151](#)
[2943666671](#) [2643163851](#) [AB4X2X6SM](#) [28B1101](#) [SM28R1575](#) [2643625902](#) [2643626102](#) [28B0268-000](#) [28B0375-100](#) [28B0375-300](#)
[28B0500-100](#) [28B0562-000](#) [28B0562-200](#) [28B0625-100](#) [28B1020-100](#) [28B1417-200](#) [28R1101-000](#) [28R1102-100](#) [28R1127-500](#) [28R0453-](#)
[200](#) [28R0669-000](#) [28R0898-200](#) [28R0756-200](#) [28R0480-000](#) [28R1127-000](#) [28R0984-200](#) [28R2170-100](#) [28R0592-010](#) [28R0756-000](#)