


Power Inductors For Digital Amplifier

●DPE3119-Series

1. Dimensions(mm)

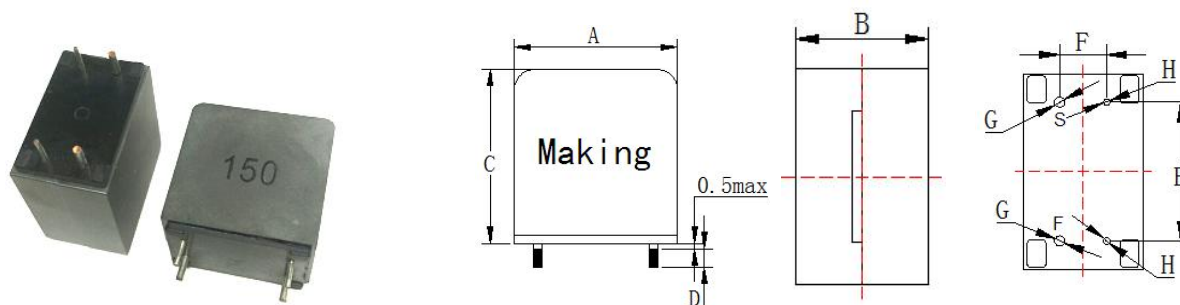

Features

- a、 Compact size using flat wire
- b、 Low radiation noise by magnetically shielded construction
- c、 Small, low resistance and High current
- d、 Suitable for high power home theater system and AV amplifier

N0.	A±0.5	B±0.5	C max	D±0.5	E±0.3	F±0.3	G±0.1	H±0.1
Spec.	31	19	33	5.0	22	7.5	1.6	1.0

2. Electrical characteristics

Part Number	Code	L (uH)±20%	DCR(m Ω)Max	Isat(A)	Irms(A)
DPE3119-100M	100	10	6.9	50	12.5
DPE3119-120M	120	12	6.9	50	12.5
DPE3119-150M	150	15	6.9	47	12.0
DPE3119-180M	180	18	6.9	34	12.5
DPE3119-220M	220	22	6.9	31	12.0

1. Measurement Frequency for Inductance: 100KHz/0.25V
2. DC saturation allowable current: Inductance drift is within-25% at the superposition.
3. Temperature rise allowable current :A rise in temperature of surface of core is within 40°C
4. Ambient temperature -40°C to +85°C
5. Storage temperature Component: -40°C to +125°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [FANGCHENG](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)