




05 CCM

Non-magnetic

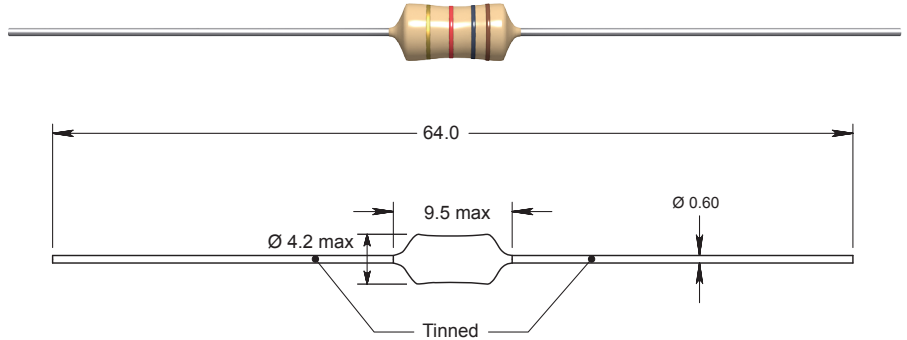

Fixed Choke Coils

Leaded Inductors / Medical Applications

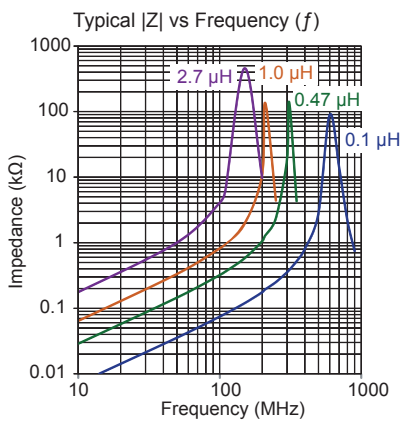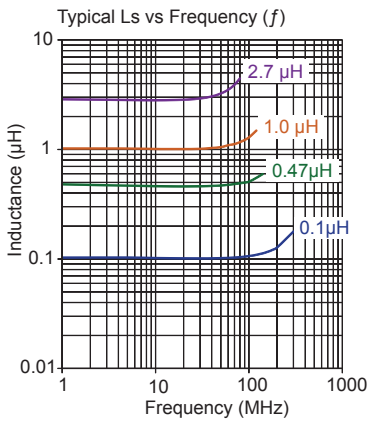

Part No	Inductance	f _L (MHz)	Tol	Q	f _Q (MHz)	SRF typ (MHz)	DCR max (Ω)	Rated DC Current max (mA)
	L (µH)		± (%)					
05CCM-R10X-YY	0.10	1	10,20	50	25	700	0.025	2800
05CCM-R12X-YY	0.12	1	10,20	50	25	600	0.035	2560
05CCM-R15X-YY	0.15	1	10,20	50	25	530	0.038	2310
05CCM-R18X-YY	0.18	1	10,20	50	25	490	0.043	2200
05CCM-R22X-YY	0.22	1	10,20	50	25	450	0.048	1875
05CCM-R27X-YY	0.27	1	10,20	50	25	400	0.055	1760
05CCM-R33X-YY	0.33	1	10,20	55	25	360	0.065	1650
05CCM-R39X-YY	0.39	1	10,20	50	25	350	0.090	1525
05CCM-R47X-YY	0.47	1	10,20	55	25	310	0.097	1475
05CCM-R56X-YY	0.56	1	10,20	50	25	280	0.115	1435
05CCM-R68X-YY	0.68	1	10,20	55	25	250	0.150	1315
05CCM-R82X-YY	0.82	1	10,20	45	25	225	0.210	1020
05CCM-1R0X-YY	1.00	1	10,20	53	25	200	0.300	890
05CCM-1R2X-YY	1.20	1	10,20	30	7.9	180	0.360	820
05CCM-1R5X-YY	1.50	1	10,20	30	7.9	160	0.520	680
05CCM-1R8X-YY	1.80	1	10,20	30	7.9	150	0.675	570
05CCM-2R2X-YY	2.20	1	10,20	35	7.9	135	1.000	480
05CCM-2R7X-YY	2.70	1	10,20	35	7.9	120	1.360	400

Core Material : Phenolic

Revision date : 12 Aug 2020

SPQ :

Packing Form	Taped / Reel	Taped / Ammo pack
Axial	3500 [-01]	1200 [-02]
Radial	1500 [-31]	2500 [-32]

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Fastron](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#)
[9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#)
[RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#)
[DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#)
[1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#)