

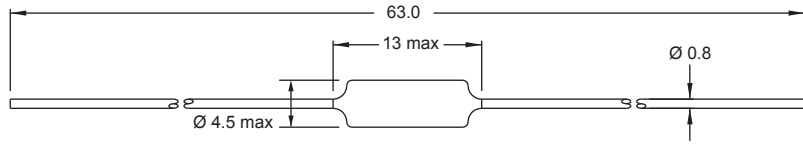


# HCCC



(Fixed Choke Coils)

Leaded Inductors

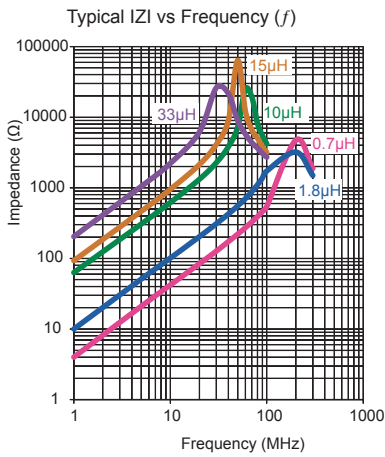

Single layer (typ)

Part No	Inductance	f <sub>L</sub>	ToI	DCR	Rated DC Current
	L (µH)	(MHz)	± (%)	max (Ω)	
HCCC-R70M-YY	0.7	1	<b>20</b>	0.018	7.00
HCCC-1R0X-YY	1.0	1	<b>10,20</b>	0.018	4.00
HCCC-1R2X-YY	1.2	1	<b>10,20</b>	0.035	2.60
HCCC-1R5X-YY	1.5	1	<b>10,20</b>	0.050	2.50
HCCC-1R8X-YY	1.8	1	<b>10,20</b>	0.066	2.50
HCCC-2R2X-YY	2.2	1	<b>10,20</b>	0.070	2.30
HCCC-2R7X-YY	2.7	1	<b>10,20</b>	0.080	2.30
HCCC-3R3X-YY	3.3	1	<b>10,20</b>	0.115	1.80
HCCC-3R6X-YY	3.6	1	<b>10,20</b>	0.132	1.80
HCCC-3R9X-YY	3.9	1	<b>10,20</b>	0.132	1.70
HCCC-5R6X-YY	5.6	1	<b>10,20</b>	0.140	1.50
HCCC-6R8X-YY	6.8	1	<b>10,20</b>	0.276	1.50
HCCC-8R2X-YY	8.2	1	<b>10,20</b>	0.276	1.50
HCCC-100X-YY	10	1	<b>10,20</b>	0.320	1.30
HCCC-120X-YY	12	1	<b>10,20</b>	0.650	0.70
HCCC-150X-YY	15	1	<b>10,20</b>	1.100	0.60
HCCC-180X-YY	18	1	<b>10,20</b>	1.200	0.60
HCCC-220X-YY	22	1	<b>10,20</b>	2.500	0.40
HCCC-270X-YY	27	1	<b>10,20</b>	2.900	0.30
HCCC-330X-YY	33	1	<b>10,20</b>	3.300	0.30

Core Material : Ferrite

Revision date : 11 Aug 2014

SPQ :

Packing Form	Taped / Reel	Taped / Ammo pack
Axial	2500 [-01]	800 [-02]

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Fastron](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#)  
[MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#)  
[PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#)  
[RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#)  
[DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#)  
[1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)