


## VL型立式固定電感器 VL TYPE VERTICAL FIXED INDUCTORS

### 訂貨代碼 HOW TO ORDER

舉例 FOR EXAMPLE

VL	U	0608	—	220	K	P
↓	↓	↓		↓	↓	↓
A	B	C		D	E	F

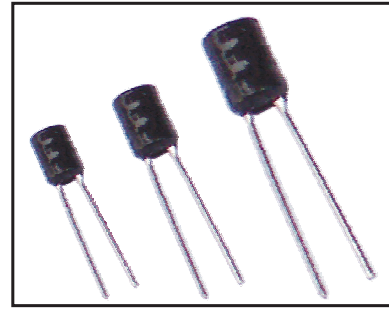

A:

產品類別 Product type	
VL	立式固定電感器 Vertical fixed inductor

C:

尺寸 Dimensions(mm)		
類型 Type	外徑 ΦCmax	體長 Amax
0406	4.5	7.0
0608	8.0	10.0
0810	10.5	12.5
0912	12.0	14.5
1012	12.5	14.5

E:

感量偏差 Tolerance	
J	± 5.0%
K	± 10%
M	± 20%

B:

封裝形式 Envelopment configuration	
U	UL套管 UL sleeve
B	樹脂包封 Resin
P	PET套管 PET sleeve
M	磁屏蔽 Magnetic shielding
空格	無封裝 No Encapsulation

D:

標稱電感量 Nominal inductance(μH)
<p>前兩位數字為有效數字，后一位數字表示零的個數。 The first two digits are significant, and the third digit is number of zero 例如 For example:</p> <p>101=100 μH 5R6=5.6 μH R22=0.22 μH</p>


F:

包裝方式別 Packaging style	
F	散包裝 Bulk
P	編帶包裝 Tape

# VL型立式固定電感器

## VL TYPE VERTICAL FIXED INDUCTORS


- 構造(外形及尺寸)  
STRUCTURE(EXTERNAL DIMENSIONS)

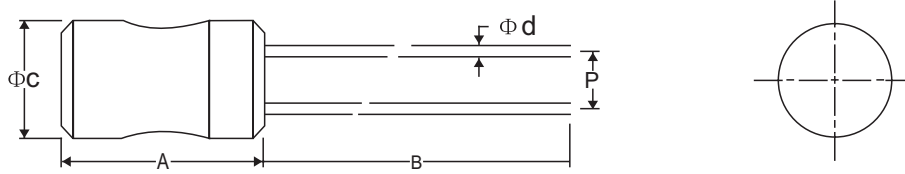

類型Type	尺寸Dimensions(mm)				
	ΦC(max)	A(max)	B(min)	Φd	P
0406	4.5	7.0	15.0	0.50±0.05	2.0±1.0
0608	8.0	10.0	15.0	0.60±0.05	2.5±1.0
0810	10.5	12.5	15.0	0.60±0.05	3.5±1.5
0912	12.0	14.5	15.0	0.65±0.05	5.0±1.5
1012	12.5	14.5	15.0	0.65±0.05	6.0±1.5

#特殊要求的產品可以根據客戶要求生產  
The products can be customized according to customer requirement.

- 包裝方式&數量  
PACKAGING STYLE&QUANTITY

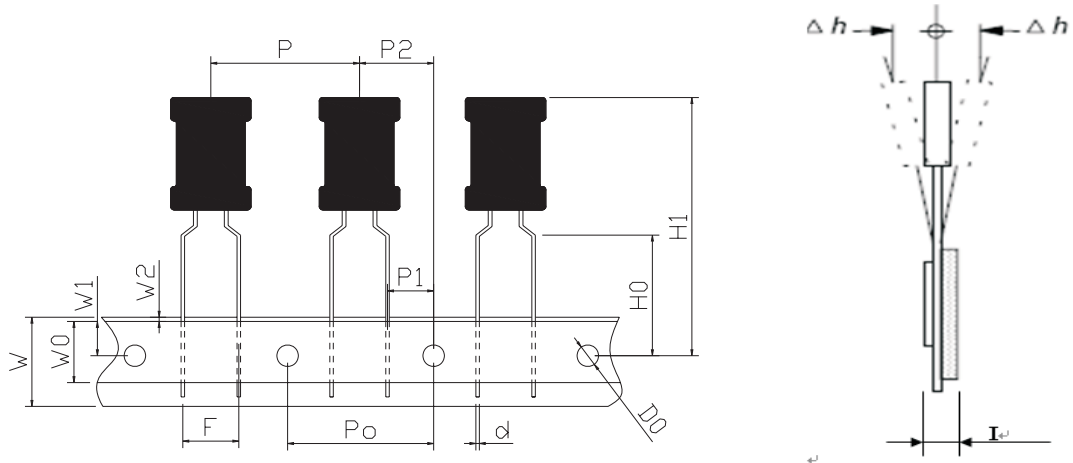

代號 Code	P	P0	P1	P2	d	Δh	W	W0	W1	W2	H0	H1	D0	I	F
尺寸 Dim.	12.7	12.7	3.85	6.35	0.6	0	18.5	12	9	1.5	15-20	35.0	4.0	1.4	5.0
誤差 Tol.	±1.0	±0.2	±0.7	±0.4	±0.1	±1.0	±1.0	±1.0	±1.0	±1.5	±0.5	Max	±0.2	Max	±0.8

包裝方式 Packaging style	散包裝Bulk	盒帶包裝 Ammok
包裝數量Quantity	200pcs	1500pcs

#可根據用戶需求包裝  
Packaging according to customer's requirement

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Fenghua Advanced](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [CR54NP-470LC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#)  
[MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#)  
[1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#)  
[RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-](#)  
[223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#)  
[1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#)