

KNX PIR movement and presence detectors



Hotel room energy-saving units



Lighting control in corridors (for hotels, offices and hospitals)



Offices, swimming baths and schools



Staircase light control



Building and house automation



KNX movement and presence detectors.

Internal installation.

- 2 outputs (datapoint) for load control (Lighting, HVAC etc.)
- Adjustment of ambient light threshold, and PIR sensitivity
- 1 output (datapoint) – master/slave detection
- Selectable function to inhibit ambient light threshold control
- Reporting of light level and movement status
- Detection of movement direction (type 18.4K)
- Internal ceiling mounting
- Suitable for ETS 4 (or latest versions)

18.4K/18.5K
KNX terminal



For outline drawings see page 4

Supply specification

Type of BUS		KNX	KNX
Supply voltage	V DC	30	30
Rated consumption	mA	10	10

Technical data

Ambient light intervention threshold	lx	1...1500	1...1500
Light ON time after last detection		0.1 s...18 h	0.1 s...18 h
Ambient temperature range	°C	-5...+45	-5...+45
Protection category		IP 40	IP 40

Approvals (according to type)



NEW 18.4K.9.030.0000



- Applications: hotel and offices corridors, transit areas
- Sensing area 30 meters length and 4 meters width
- Two detection areas: right and left

NEW 18.5K.9.030.0000



- Applications: offices, schools, zones of low activity
- Extensive sensing area up to 64 m²
- Two sensing areas: "presence" suitable for zones of low activity, and "movement" suitable for transit areas or zones of high activity

Ordering information


Example: 18 series, KNX PIR movement and presence detector.




- Series** — 18
- Type** — 5 = PIR movement and presence detector
- Supply voltage** — 030 = KNX Bus
- Supply version** — 9 = DC
- Output** — K = PIR movement and presence detector with KNX interface

Sensing area

Type 18.4K

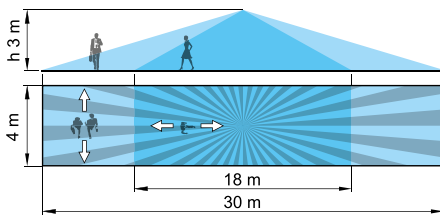

Type 18.5K

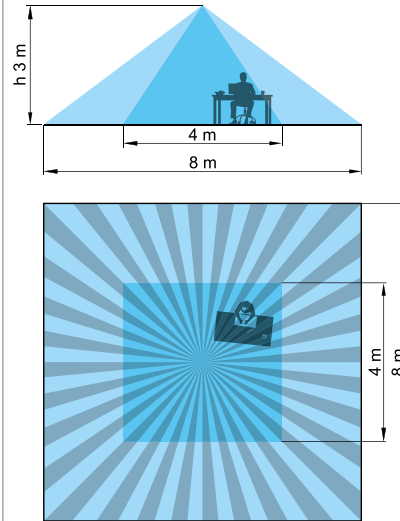

Outline drawings

Type	Suspended ceiling mounting	Recess mounting	Surface mounting
18.4K			
18.5K			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Finder manufacturer:](#)

Other Similar products are found below :

[013.B9](#) [022.18.1](#) [022.26](#) [022.63](#) [022.65](#) [026.9.012](#) [04605](#) [046.07](#) [060.48](#) [066.07](#) [072.01.06](#) [072.01.15](#) [072.11](#) [07211](#) [072.31](#) [072.500](#)
[072.501](#) [072.503](#) [072503](#) [072.51](#) [072.53](#) [090.33](#) [092.00.2](#) [092.54](#) [092.71](#) [093.20](#) [093.48](#) [094.51](#) [094.71](#) [09471](#) [094.91.3](#) [095.01](#) [095.08](#)
[095.18](#) [095.51](#) [095.52](#) [095.71](#) [095.80.3](#) [095.91.3](#) [09700](#) [097.01](#) [10.41.8.230.0000](#) [10.42.8.230.0000](#) [10.51.8.230.0000](#) [10.61.8.230.0000](#)
[11.31.8.230.0000](#) [11.41.8.230.0000](#) [11.42.8.230.0000](#) [1169311](#) [11.91.8.230.0000](#)