


BAV70



SWITCHING DIODE 開關二極管

■ FEATURES 特點

Characteristic 特性參數	Symbol 符號	Max 最大值	Unit 單位
Power dissipation 耗散功率	P _D (Ta=25°C)	225	mW
Forward Current 正向電流	I _F	200	mA
Reverse Voltage 反向電壓	V _R	70	V
Solder Temperature/Solder Time 焊接溫度/焊接時間	T/t	260/10	°C/S
Junction and Storage Temperature 結溫和儲藏溫度	T _j , T _{stg}	-55 to +150	°C

■ DEVICE MARKING 打標

BAV70=A4

■ ELECTRICAL CHARACTERISTICS 電特性


(TA=25°C unless otherwise noted 如無特殊說明，溫度為 25°C)

Characteristic 特性參數	Symbol 符號	Min 最小值	Max 最大值	Unit 單位
Reverse Breakdown Voltage 反向擊穿電壓 (IR=100uA)	V(BR)	70	—	V
Reverse Leakage Current 反向漏電流 (VR=70V)	I _R	—	1	uA
Forward Voltage(Test Condition)正向電壓 I _F =1mA I _F =10mA I _F =50mA I _F =150mA	V _F		715 855 1000 1250	mV
Diode Capacitance 二極體電容 (VR=0V, f=1MHz)	C _D	—	1.5	pF
Reverse Recovery Time 反向恢復時間	T _{rr}	—	6	nS


BAV70

■DIMENSION 外形封裝尺寸

單位(UNIT): mm

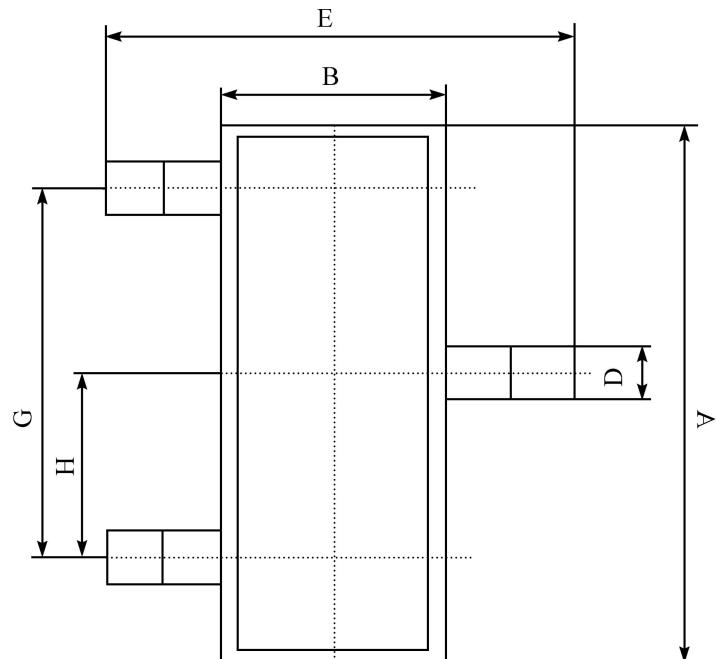

序號	數值及公差
A	2.90 ± 0.10
B	1.30 ± 0.10
C	1.00 ± 0.10
D	0.40 ± 0.10
E	2.40 ± 0.20
G	1.90 ± 0.10
H	0.95 ± 0.05
J	0.13 ± 0.05
K	$0.00-0.10$
M	≥ 0.2
N	0.60 ± 0.10
P	$7 \pm 2^\circ$

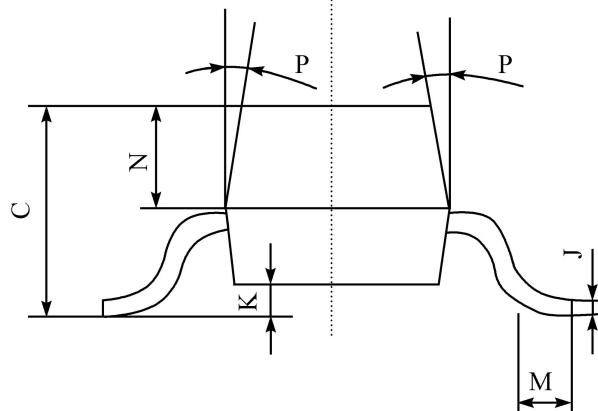

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by FOSAN manufacturer:

Other Similar products are found below :

[MMBD3004S-13-F](#) [RD0306T-H](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#) [1SS193,LF](#) [1SS400CST2RA](#)
[SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#) [1SS226-TP](#) [RFUH20TB3S](#)
[D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [LL4151-GS18](#) [053684A](#)
[SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [1N4454-TR](#) [BAV199E6433HTMA1](#) [BAS28-7](#)
[BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [RGP30D-E3/73](#) [BAV99TQ-13-F](#) [BAS21DWA-7](#)
[BAV99HDW-13](#) [NTE6250](#) [NTE582-4](#) [NTE582-6](#) [MMDB30-E28X](#)