

**Features**

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction


**General Description**

- Case: molded plastic
- Polarity: Color band denotes cathode
- Package: SOD-323 Plastic Package

**Marking**

Type number	Marking code
B110WS	R10

**Package outline**

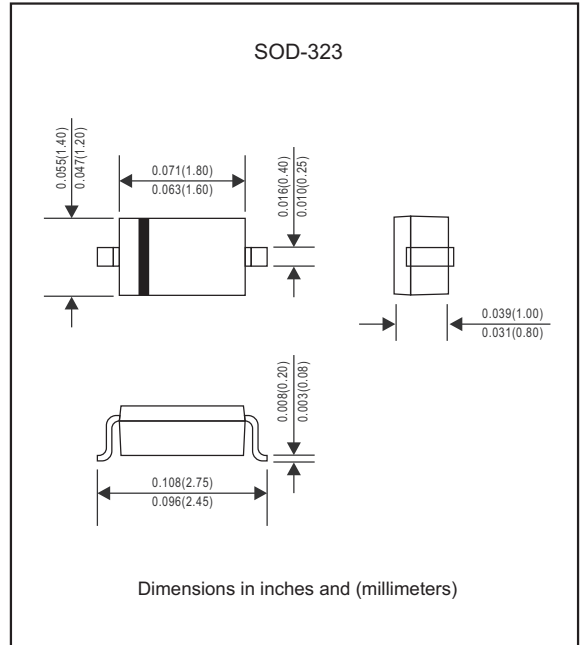





**Maximum Ratings** @ $T_A=25^{\circ}\text{C}$  unless otherwise noted

Symbol	Parameter	Limit	Unit
VRRM	Maximum Recurrent Peak Reverse Voltage	100	V
VRMS	Maximum RMS Voltage	70	V
VDC	Maximum DC Blocking Voltage	100	V
IF	Continuous Forward Current	1	A
IFSM	Non-repetitive Peak Forward Surge Current@8.3mS	15	A
Ptot	Total Power Dissipation	250	mW
RθJA	Thermal Resistance From Junction To Ambient	400	°C/W
TJ	Operation Junction Temperature Range	-40~+125	°C
TSTG	Storage Temperature Range	-55~+150	°C

**Electrical Characteristics** @ $T_A=25^{\circ}\text{C}$  unless otherwise noted

Symbol	Parameter	Test conditions	Min	Typ	Max	Unit
VF	Forward voltage	IF=1A			0.85	V
IR	Reverse voltage leakage current	VR=100V			5.0	μA

Typical Performance Characteristics (T<sub>J</sub> = 25 °C, unless otherwise noted)

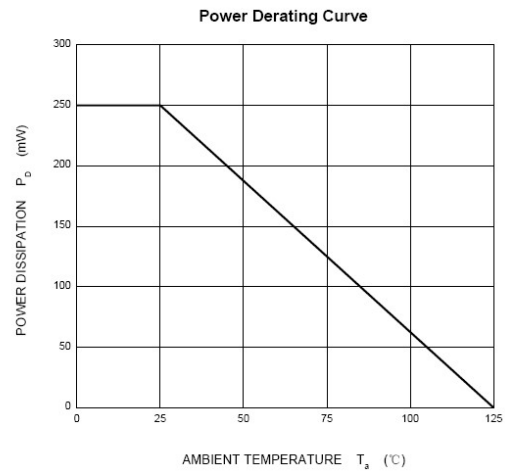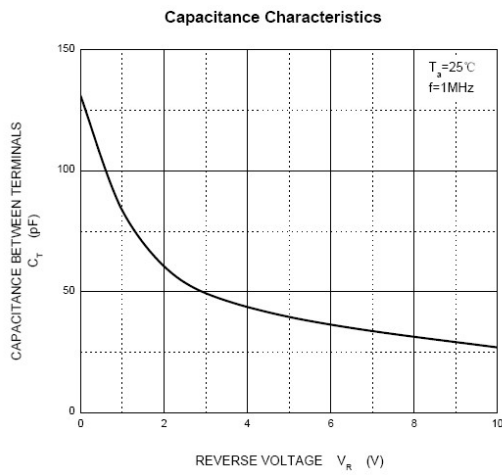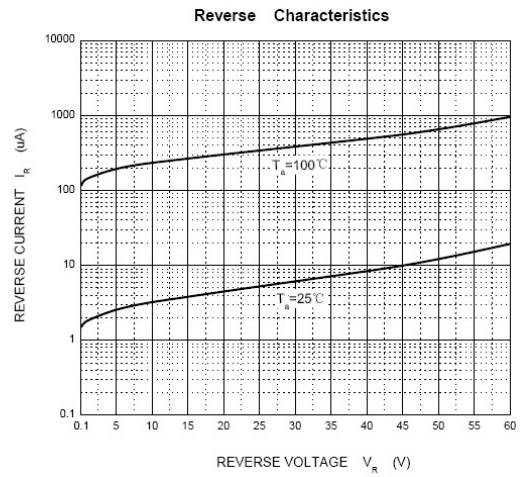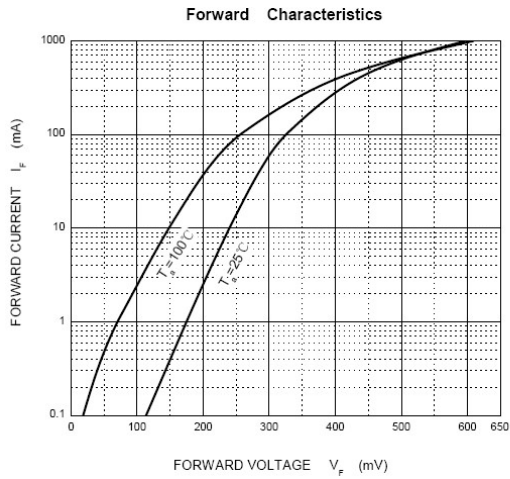

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [FUXINSEMI](#) manufacturer:*

Other Similar products are found below :

[MA4E2039](#) [MMBD301M3T5G](#) [HFA35HB60C](#) [RB160M-50TR](#) [D83C](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH](#) [E6327](#) [BAT 54-02LRH](#)  
[E6327](#) [NRVBAF360T3G](#) [NSR05F40QNXT5G](#) [NTE555](#) [SS3003CH-TL-E](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MBRA140TRPBF](#)  
[MBRB30H30CT-1G](#) [BAT 15-04R](#) [E6152](#) [JANTX1N5712-1](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [NRVBB20100CTT4G](#) [NRVBM120LT1G](#)  
[NTSB30U100CT-1G](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#)  
[ACDBA260LR-HF](#) [ACDBA1100-HF](#) [10BQ015-M3/5BT](#) [NRVBM120ET1G](#) [VSSB410S-M3/5BT](#) [1N5819T-G](#) [PDS1040Q-13](#) [B160BQ-13-F](#)  
[SDM05U20CSP-7](#) [BAS 70-07](#) [E6433](#) [B140S1F-7](#) [HSM560Je3/TR13](#) [DDB2265-000](#) [ZHCS506QTA](#) [HSM190Je3/TR13](#) [B330AF-13](#)  
[ACDBUC0230-HF](#) [SDM1U100S1F-7](#) [MBR10200CTF-G1](#) [CDLL5712](#) [DMF2822-000](#)