

# SERIES 28 HiPer-D Accessories



## Jackpost Kits

### 289-015 and 289-016


#### 289-015 JACKPOST KIT FOR HIPER-D CABLE CONNECTORS

Jackpost kits for panel mounting of HiPer-D cable connectors. 289-015 jackposts fit HiPer-D cable connectors 280-018P, 280-019S, 280-046P and 280-047S. For front-mounted and cable-mounted connectors, use 289-015-A. For rear panel mounted connectors, choose the correct jackpost based on panel thickness. #4-40 UNC 2B threads. One kit consists of (2) jackposts, (2) hex nuts and (2) split lockwashers. 300 series stainless steel, passivated.



Hiper-D Jackpost Kits for Cable Connectors				
Panel Thickness		Part Number	A	
In.	mm.		In.	mm.
(none)	(none)	<a href="#">289-015-A</a>	.250	6.35
.031	0.79	<a href="#">289-015-B</a>	.219	5.56
.047	1.19	<a href="#">289-015-C</a>	.203	5.16
.062	1.57	<a href="#">289-015-D</a>	.188	4.78
.093 <sup>(1)</sup>	2.36 <sup>(1)</sup>	<a href="#">289-015-D</a>	.188	4.78
.125 <sup>(1)</sup>	3.18 <sup>(1)</sup>	<a href="#">289-015-D</a>	.188	4.78

Note (1) Panels thicker than .062 (1.57) must be counterbored.

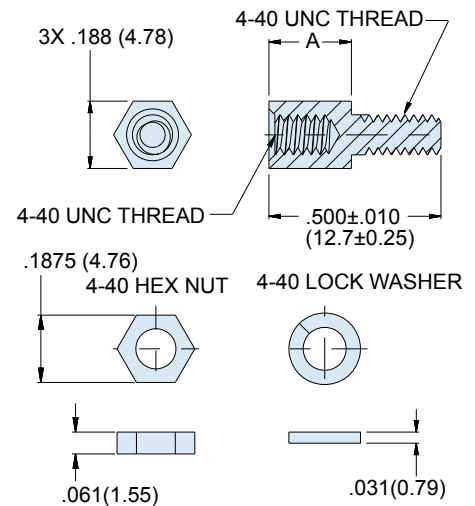


#### 289-016 JACKPOST KIT FOR LOW PROFILE PCB CONNECTORS

Stainless steel jackposts for panel mounting of low profile HiPer-D PCB connectors. For freestanding connectors, use 289-016-A. For rear panel mounted connectors, choose the correct jackpost based on panel thickness. #4-40 UNC 2B threads. 300 series stainless steel, passivated. One kit consists of (2) jackposts. Install into connector flange with threadlocking compound (not supplied).



Hiper-D Jackpost Kits for PCB Connectors				
Panel Thickness		Part Number	A	
In.	mm.		In.	mm.
(none)	(none)	<a href="#">289-016-A</a>	.250	6.35
.031	0.79	<a href="#">289-016-B</a>	.219	5.56
.047	1.19	<a href="#">289-016-C</a>	.203	5.16
.062	1.57	<a href="#">289-016-D</a>	.188	4.78
.093 <sup>(1)</sup>	2.36 <sup>(1)</sup>	<a href="#">289-016-D</a>	.188	4.78
.125 <sup>(1)</sup>	3.18 <sup>(1)</sup>	<a href="#">289-016-D</a>	.188	4.78

Note (1) Panels thicker than .062 (1.57) must be counterbored.

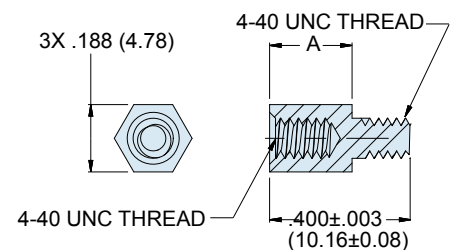

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [D-Sub Tools & Hardware](#) category:*

*Click to view products by [Glenair](#) manufacturer:*

Other Similar products are found below :

[173112-0667](#) [173112-0759](#) [173112-0967](#) [173112-0291](#) [173112-0456](#) [000-01-09-132](#) [000-01-21-132](#) [000-01-31-162](#) [572019-00105-70](#)  
[000-01-37-162](#) [621-250-113-115](#) [D20418-2R](#) [D20418-J3F](#) [70521CLF](#) [70524BLF](#) [70527BLF](#) [70527CLF](#) [F1042-1PLAH](#) [750643-1](#) [780-010-06G4-00C](#) [780-518-50SG6-WS](#) [863004ATLF](#) [86552009](#) [86553115TLF](#) [86553117TLF](#) [86553156LF](#) [FSGK1/5](#) [980-8554-000](#) [980-8555-000](#)  
[980-8557-000](#) [980-8558-000](#) [1230032-1](#) [1-5021101-2](#) [15-000050](#) [1589283-4](#) [160-000-005R031](#) [16-000230](#) [160-020-109R000](#) [160-025-004R031](#) [160-015-003R031](#) [160-020-209R000](#) [160X10909X](#) [164C03939A](#) [177-505-A-2-2](#) [177-505-C-4-4](#) [179-013-1H](#) [1-966830-8](#) [21018-6](#)  
[21028-3](#) [213622-5](#)