

SERIES 28 HiPer-D® Accessories




Jackpost Kits

289-015 and 289-016

289-015 JACKPOST KIT FOR HIPER-D® CABLE CONNECTORS


Jackpost kits for panel mounting of HiPer-D® cable connectors. 289-015 jackposts fit HiPer-D® cable connectors 280-018P, 280-019S, 280-046P and 280-047S. For front-mounted and cable-mounted connectors, use 289-015-A. For rear panel mounted connectors, choose the correct jackpost based on panel thickness. #4-40 UNC 2B threads. One kit consists of (2) jackposts, (2) hex nuts and (2) split lockwashers. 300 series stainless steel, passivated.

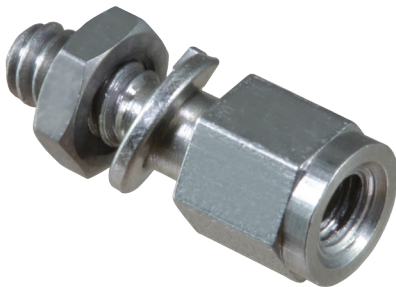

289-015

Hiper-D Jackpost Kits for Cable Connectors				
Panel Thickness		Part Number	A	
In.	mm.		In.	mm.
(none)	(none)	289-015-A	.250	6.35
.031	0.79	289-015-B	.219	5.56
.047	1.19	289-015-C	.203	5.16
.062	1.57	289-015-D	.188	4.78
.093 ⁽¹⁾	2.36 ⁽¹⁾	289-015-D	.188	4.78
.125 ⁽¹⁾	3.18 ⁽¹⁾	289-015-D	.188	4.78


Note (1) Panels thicker than .062 (1.57) must be counter-bored.

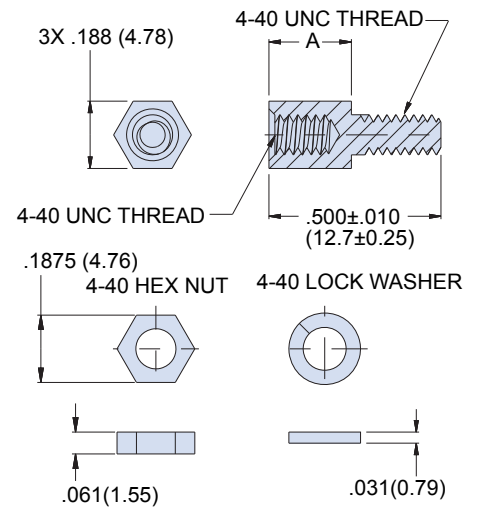

289-016 JACKPOST KIT FOR LOW PROFILE PCB CONNECTORS


Stainless steel jackposts for panel mounting of low profile HiPer-D® PCB connectors. For freestanding connectors, use 289-016-A. For rear panel mounted connectors, choose the correct jackpost based on panel thickness. #4-40 UNC 2B threads. 300 series stainless steel, passivated. One kit consists of (2) jackposts. Install into connector flange with threadlocking compound (not supplied).

289-016

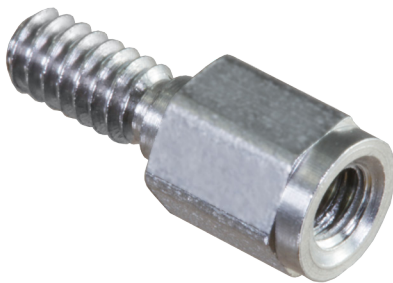

Hiper-D Jackpost Kits for PCB Connectors				
Panel Thickness		Part Number	A	
In.	mm.		In.	mm.
(none)	(none)	289-016-A	.250	6.35
.031	0.79	289-016-B	.219	5.56
.047	1.19	289-016-C	.203	5.16
.062	1.57	289-016-D	.188	4.78
.093 ⁽¹⁾	2.36 ⁽¹⁾	289-016-D	.188	4.78
.125 ⁽¹⁾	3.18 ⁽¹⁾	289-016-D	.188	4.78

Note (1) Panels thicker than .062 (1.57) must be counter-bored.

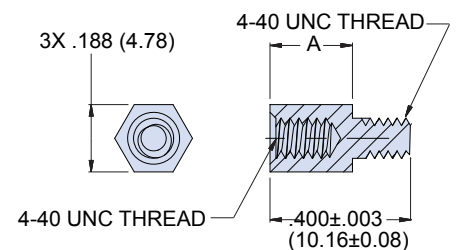

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Tools & Hardware](#) category:

Click to view products by [Glenair](#) manufacturer:

Other Similar products are found below :

[000-01-09-132](#) [000-01-21-132](#) [000-01-31-162](#) [572019-00105-70](#) [000-01-37-162](#) [621-250-113-115](#) [D110550-2](#) [D20418-137](#) [780-518-50SG6-WS](#) [86552009](#) [86553115TLF](#) [86553117TLF](#) [1230032-1](#) [1-5021101-2](#) [1589283-4](#) [160-000-005R031](#) [16-000230](#) [160-025-004R031](#) [160-020-209R000](#) [160X10909X](#) [164C03939A](#) [177-505-A-2-2](#) [1-966830-8](#) [21018-6](#) [2-1393560-9](#) [JS-1000](#) [L17D204182M3E](#) [L17D53018](#) [300X10779X](#) [160X10189X](#) [160X10419X](#) [162-000-050R000](#) [21018-5](#) [212561-3](#) [248C21550X](#) [CF15P](#) [D110277](#) [D20418-135](#) [500-008NF1K-01](#) [500-008NF3R3KS-01](#) [500-017M09FN](#) [500-017M15MHN](#) [500-024M1](#) [500-068M3](#) [5-1393561-5](#) [C115373-0001](#) [C115373-0002](#) [3342-4-KIT](#) [K1003](#) [L17D4M68711](#)