


DIMENSIONS: Inch [mm]
CO-PLANARITY: 0.004 [0.10]
TOLERANCES: ±0.005 IF NOT SPECIFIED

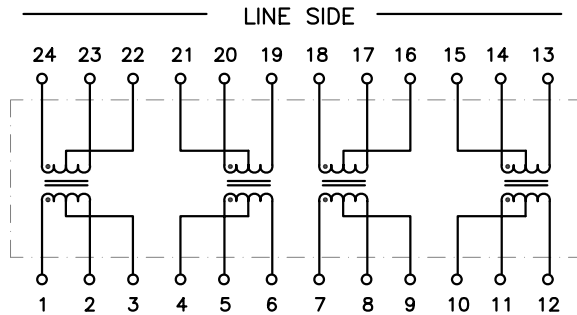

PART NO.: TG111-HRPE41NYRL

ONE-PORT GIGABIT OR DUAL-PORT FAST ETHERNET
MAGNETICS COMPLIANT WITH IEEE802.3 REQUIREMENTS
1A CURRENT CARRYING CAPACITY PER PAIR ON LINE-SIDE
(500mA PER WIRE) FOR HIGH POWER PoE APPLICATIONS

RoHS COMPLIANT

COMPATIBLE TO LEAD-FREE SOLDERING PROCESS
CONDITION PER IPC/JEDEC J-STD-020C

UL/EN60950 AND DEMKO RECOGNIZED

EXTENDED OPERATING TEMPERATURE -40/+55°C

ELECTRICAL SPECIFICATIONS @ 25° C

URNS RATIO	1CT:1CT±2%
OCL (100KHz,0.1Vrms,8mA)	350µH min
UNBALANCED DC CURRENT	13mA max*
DCR	
P14-13,P18-17,P20-19,P24-23	0.6Ω max
INSERTION LOSS	
1-100MHz	-1.1dB max
RETURN LOSS	
1-40MHz	-18dB min
60MHz	-14dB min
80MHz	-12dB min
100MHz	-10dB min
CROSSTALK 1-100MHz	-40dB typ
ISOLATION	1,500Vrms

* MAXIMUM DC CURRENT ALLOWED TO MAINTAIN OCL OF 350µH(TYP)
OVER OPERATING TEMPERATURE



HALO/PBL

CALIFORNIA, USA
KOWLOON, HONG KONG
SINGAPORE

TITLE	ISOLATION MODULE		SIGNATURES	DATE	REV.	DESC.	DATE
	FOR	HIGH POWER PoE APPL.	DRAWN PETER LU	10/8/07	A	FIRST ISSUE	10/8/07
	PART NO.	TG111-HRPE41NYRL	CHECKED LEI KEONG	10/16/09	B	UPDATE SPEC.	11/8/07
	SCALE	NONE	APPROVED PETER LU	10/16/09	C	REVISE OP. TEMP.	1/28/08
	PAGE	1 OF 1	FILE	HRPE41NYRL.DWG	D	PROD. RELEASE	10/16/09

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:

Click to view products by [Hakko](#) manufacturer:

Other Similar products are found below :

[CX2041NLT](#) [MGPWT-00449-P](#) [PE-64961](#) [H1302FNLT](#) [H5008FNL](#) [H5012FNL](#) [H5020FNLT](#) [H5077NLT](#) [H5079NLT](#) [H5084FNLT](#)
[B78476A9558A003](#) [1812WBT2-4](#) [1879479-1](#) [HX2260FNL](#) [HX5014FNL](#) [EX2024FNL](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [PE-65848FNLT](#) [H1174FNL](#) [H1302FNL](#) [H5015FNL](#) [H5019EFNL](#) [H5062FNLT](#) [CX2047LNL](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [BX1194WNLT](#) [HX1234NLT](#) [HX5008FNLT](#) [HX5019FNL](#) [HX5084NL](#) [3-1879385-5](#) [TX1263NLT](#) [4-1879391-0](#) [T1142NL](#) [HX6101FNL](#) [HX5084FNL](#) [HX1148NL](#) [HX5020FNLT](#) [HX5014FNLT](#) [T1124NL](#)
[1879732-1](#)