


The TGSAD-V6LF series of 6 pin transformers has been designed specifically to work in conjunction with Analog Devices, Inc. Quad Channel Isolators with integrated transformer drivers. These supplemental isolation modules are UL/EN60950 recognized for working voltages up to 300 Volts. Other packages are available with isolation voltages ranging from 1.5KV to 4.5KVrms. Analog Devices is a trademark of Analog Devices, Inc. For more information please go to [iCoupler digital isolation portfolio](#).




TGSAD-V6LF Package

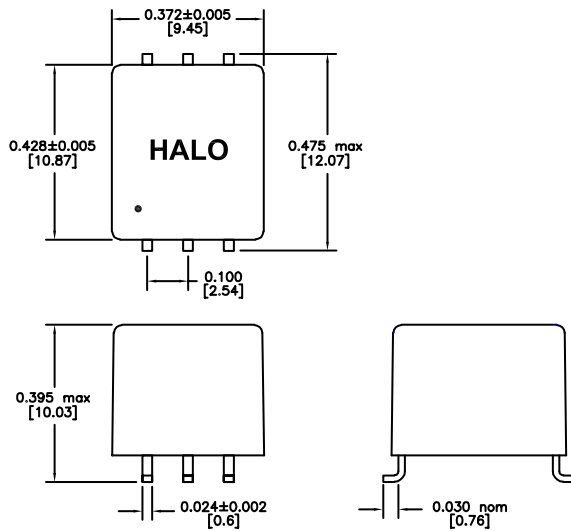

DIMENSIONS: Inch(mm)
CO-PLANARITY: 0.004(0.102)

Circuit Diagram

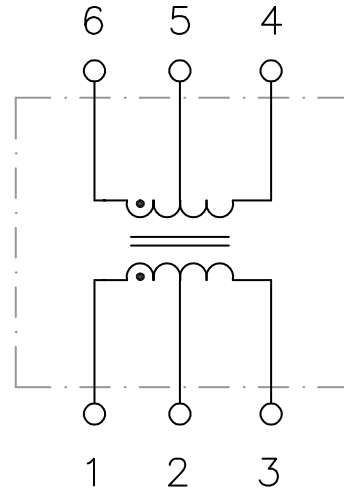

Electrical Specifications @ 25°C
 Operating Temp: -40 to +85°C
 PRI Pins: 1-3
 PRI OCL: 389µH typ.
 PRI DCR: 0.8Ω



Part Number SMD	Turns Ratio +/-3% PRI : SEC	ET Constant V-us Min*	Isolation Vrms
TGSAD-260V6LF	1CT:2CT	14	2,500
TGSAD-290V6LF	1CT:3CT	14	2,500
TGSAD-292V6LF	1CT:5CT	14	2,500

* Minimum ET Constant over operating temperature range

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pulse Transformers](#) category:

Click to view products by [Hakko](#) manufacturer:

Other Similar products are found below :

[E4001NLT](#) [1879401-1](#) [IF-18-0269-N](#) [T1042NLT](#) [T1049NL](#) [PE-68023NL](#) [PH0905NL](#) [PT4163S](#) [PT5010](#) [PA0173NLT](#) [CTX02-14608](#) [PE-65457NLT](#) [T60403-D4721-X088](#) [H1183NLT](#) [CTX33-18971-R](#) [HM2108NLT](#) [HM0068ANLT](#) [PG1427.001NLT](#) [750031353](#) [PH9400.566NLT](#) [PH9400.655ANLT](#) [PH9400.655NLT](#) [PH9385.013NLT](#) [B78307X0001](#) [B78307A2276A003](#) [HX6096FNL](#) [HX6106NLT](#) [P0926NL](#) [HX6096NL](#) [PA3493NLT](#) [P0585ANL](#) [HU4102NL](#) [PH9385.012NLT](#) [PH9400.111NLT](#) [PH9400.211NLT](#) [PH9400.233ANLT](#) [SMQC1553-6](#) [78615/9JC-R](#) [SMQ1553-45](#) [Q1553-45](#) [Q1553-22](#) [Q1553-21](#) [PH9400.211ANLT](#) [TGM-050P3RL](#) [TGMS-1464V6LF](#) [TGRAD-560V8LF](#) [TGMR-360V6LF](#) [P0544](#) [PA0264NLT](#) [T60403-D4215-X014](#)