






Quality Products. Service Excellence.

Miniature Audio Potted 101 Series

PC Board Mount

Features

- Pin type, miniature size, P.C. board mount, net weight of only 0.1 oz.
- Rugged potted construction produces a completely sealed unit withstanding severe environmental conditions.
- Secondary may be used as primary and primary as secondary.
- Power level: Minimum frequency range: 300 Hz. to 100 KHz. +/- 0.5 db @ 100 mw
 - Frequency range @ +10 dbm is 200 Hz. to 100 KHz. +/- 0.5 db
 - Frequency range @ +15 dbm is 200 Hz. to 100 KHz. +/- 0.5 db
 - Frequency range @ +20 dbm is 300 Hz. to 100 KHz. +/- 0.5 db
 - Frequency measurements with no D.C. current saturation.
- See data sheets for more detailed information.

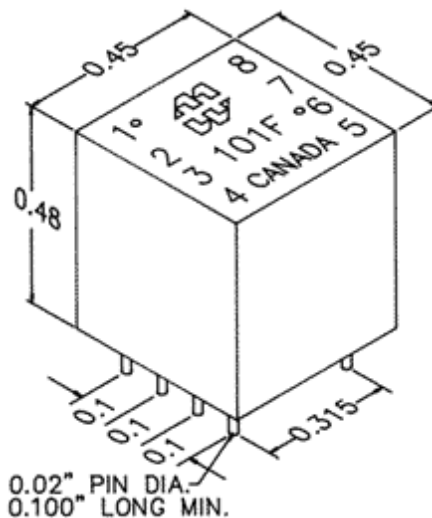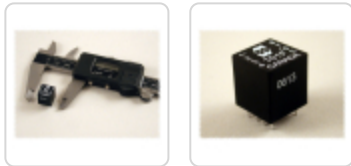

Part No.	Nominal Impedance (Ohms)		Nominal Resistance (Ohms)		Useful Impedance Range (Ohms)	
	Primary	Secondary	Primary	Secondary	Pri./Sec. to Pri./Sec.	
101D	300 ct	600 ct	20.4	54	150/300	600/1200
101F	600 ct	600 ct	44	52	300/300	1200/1200
101H	1200 ct	600 ct	80	53	600/300	2400/1200
101J	2500 ct	600 ct	150	54	1250/300	5000/1200
101P	300 ct	50 ct	20.4	4.8	150/25	600/100
101R	600 ct	50 ct	44	4.7	300/25	1200/100
101V	2500 ct	50 ct	150.7	4.9	1250/25	5000/100

Data subject to change without notice

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:

Click to view products by [Hammond](#) manufacturer:

Other Similar products are found below :

[CX2041NLT](#) [MGPWT-00449-P](#) [PE-64961](#) [H1302FNLT](#) [H5008FNL](#) [H5012FNL](#) [H5020FNLT](#) [H5077NLT](#) [H5084FNLT](#)
[B78476A9558A003](#) [1812WBT2-4](#) [1879479-1](#) [HX2260FNL](#) [HX5014FNL](#) [EX2024FNL](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [PE-65848FNLT](#) [H1174FNL](#) [H1302FNL](#) [H5015FNL](#) [H5019EFNL](#) [H5062FNLT](#) [CX2047LNL](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [BX1194WNLT](#) [HX1234NLT](#) [HX5008FNLT](#) [HX5019FNL](#) [HX5084NL](#) [3-1879385-5](#) [TX1263NLT](#) [4-1879391-0](#) [P2004NLT](#) [T1142NL](#) [HX6101FNL](#) [HX1148NL](#) [HX5020FNLT](#) [HX5014FNLT](#) [T1124NL](#) [1879732-1](#)
[2-1879391-5](#)