




Quality Products. Service Excellence.

Isolation - Step Down (230VAC to 115VAC) 172 Series

Plug-In




Features

- Primary 230VAC, 50/60 Hz. Secondary 115VAC
- Circuit breaker in primary.
- Provides circuit isolation & steps down primary voltage.
- Hi-pot tested to 2 KV RMS.
- Electrostatic shield between primary & secondary.
- Input (primary) connected to a 5 foot long cord & European (Schuko) grounded plug - NOTE: old inventory only.
- Input - due to U.L changes in 2007 - NEW production with the European (Shuko) parts would no longer be U.L. listed. Therefore, we have replaced this input plug with a standard North American 3-wire, 250V plug (NEMA 6-15P).
- Output (secondary) connected to a 1 foot long cord & standard North American 3-wire grounded receptacle (NEMA 5-15R).
- North American Mark of Safety - C UL & UL listed (File #E211544).
- Indoor use only.
- **Remember** - These units do NOT convert line frequency

Accessories

- International Grounded Adaptor Plugs

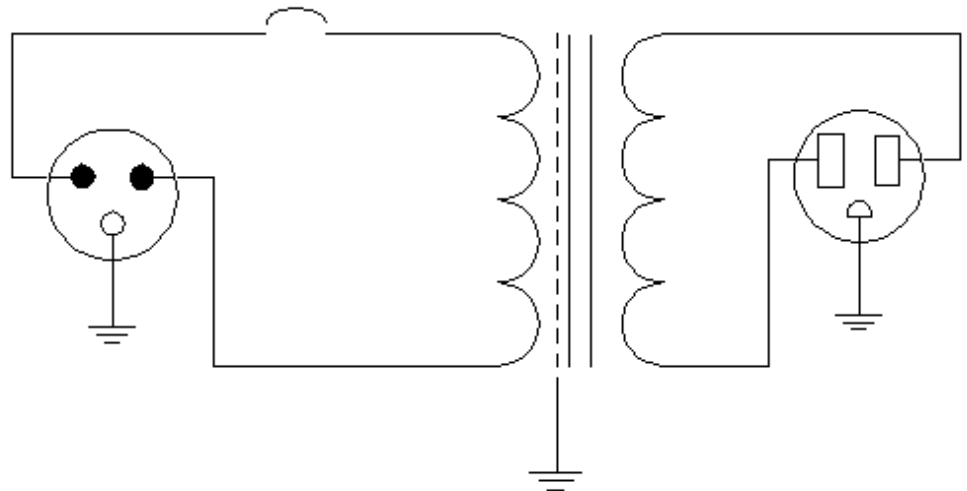

Part No.	Full Load Total					Capacitance		Overall Dimensions					Weight Lbs
	Capacity VA	Leakage Current μA	Full Load Efficiency	Harmonic Distortion	Surge / Noise Suppression	Between Windings at 1KHz	A	B	C	D	E		
172A	100	40.48 μA	88%	0.19%	-35 dB	40 pF	3.80	5.06	4.68	3.00	3.38	6.5	

Part No.	Capacity		Full Load Total			Surge / Noise		Capacitance		Overall Dimensions					Weight Lbs
	VA	Leakage Current	Efficiency	Harmonic Distortion	Suppression	Between Windings at 1KHz		A	B	C	D	E			
	172B	200	41.97 μ A	91%	0.18%	-34.32 dB	20 pF		3.80	5.56	4.68	3.00	3.88	8.5	
172D	500	68.22 μ A	96%	0.23%	-37.69 dB	28 pF		3.80	7.06	4.68	3.00	5.38	18.5		
172E	750	79.58 μ A	94%	0.19%	-38.24 dB	20 pF		4.40	8.70	5.39	3.50	6.78	30		
172F	1000	94.08 μ A	96%	0.18%	-32.74 dB	40 pF		5.28	7.75	6.38	4.25	6.00	34.5		

Data subject to change without notice

© 2022. Hammond Manufacturing Ltd. All rights reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Transformers](#) category:

Click to view products by [Hammond](#) manufacturer:

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)