

## M23 P fem.-c 0,6mm (0,08–0,34mm<sup>2</sup>) Au

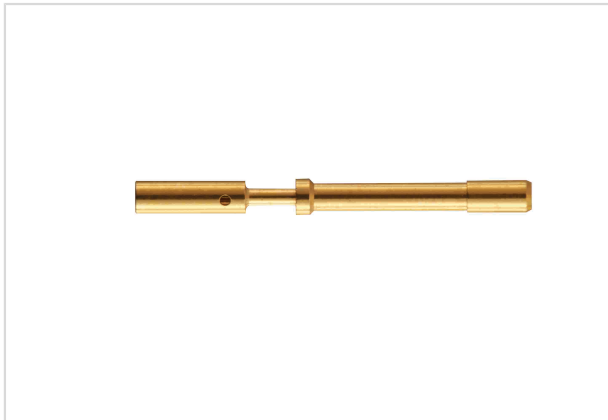


Image is for illustration purposes only. Please refer to product description.

Part number	09 15 600 6291
Specification	M23 P fem.-c 0,6mm (0,08–0,34mm <sup>2</sup> ) Au
HARTING eCatalogue	<a href="https://b2b.harting.com/09156006291">https://b2b.harting.com/09156006291</a>

### Identification

Category	Contacts
Series	Circular connectors M23
Identification	Power
Type of contact	Crimp contact
Description of the contact	0.6 mm

### Version

Gender	Female
Manufacturing process	Turned contacts

### Technical characteristics

Conductor cross-section	0.08 ... 0.34 mm <sup>2</sup>
Operating current	≤2 A
Contact resistance	≤3 mΩ
Stripping length	4 mm

### Material properties

Material (contacts)	Copper alloy
Surface (contacts)	Gold plated
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50



Pushing Performance

## Material properties

REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead
ECHA SCIP number	339476a1-86ba-49e9-ab4b-cd336420d72a
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead

## Specifications and approvals

Specifications	EN 60664-1 IEC 61984
----------------	-------------------------

## Commercial data

Packaging size	100
Net weight	0.19 g
Country of origin	Switzerland
European customs tariff number	85366990
eCl@ss	27440204 Contact for industrial connectors

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circular Metric Connectors](#) category:*

*Click to view products by [HARTING](#) manufacturer:*

Other Similar products are found below :

[600X518037X](#) [MA1EAF1200](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R4A00A18M020](#) [8R5000A16M005](#) [1200910008](#) [1200910011](#)  
[1300140094](#) [130203-0054](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [8R4006A16M010](#) [8R5006A18A120](#) [1604232](#)  
[1R3006A20M005](#) [RF-12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-01016](#) [41-40011](#) [41-40017](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-](#)  
[00002](#) [43-01166](#) [41-40005](#) [41-40016](#) [43-00161](#) [43-01191](#) [XS3P-M421-2](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#) [8R4006A16A120](#)  
[8R4000A16M010](#) [RKC 50/16](#) [1R3004A20A1201](#) [6-22279-3](#) [N03FA03144](#) [1300140077](#) [XS8A-0441](#) [859RD04-103R004](#) [860RD04-113R004](#)  
[860RD04-213R004](#) [860-X08-213R004](#) [1-213245-2](#) [2273142-2](#)