

## preLink PCB to ix Industrial module

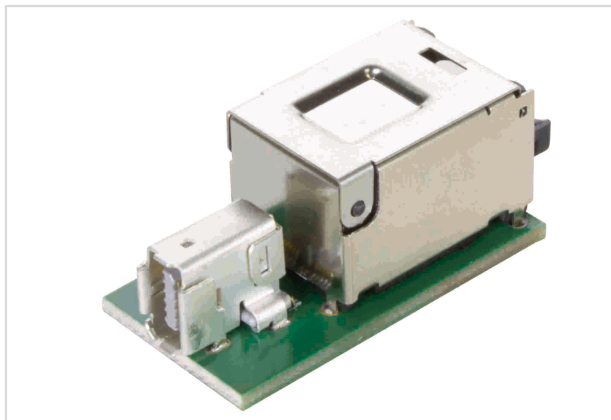


Image is for illustration purposes only. Please refer to product description.

Part number	20 82 008 0001
Specification	preLink PCB to ix Industrial module
HARTING eCatalogue	<a href="https://b2b.harting.com/20820080001">https://b2b.harting.com/20820080001</a>

### Identification

Category	Connectors
Series	HARTING ix Industrial®
Element	Adapter PCB
Specification	preLink® PCB to ix Industrial® module

### Version

Termination method	preLink® IDC insulation displacement termination
Shielding	Shielded
Number of contacts	8
Coding	Type A

### Technical characteristics

Rated current	1.5 A
Rated voltage	50 V AC 60 V DC
Contact resistance	≤30 mΩ
Contact resistance, shielding	≤100 mΩ
Limiting temperature	-40 ... +85 °C
Storage temperature	-30 ... +60 °C
Insertion force	≤25 N
Withdrawal force	≤25 N
Degree of protection acc. to IEC 60529	IP20
Test voltage $U_{r.m.s.}$	0.5 kV



Pushing Performance

## Technical characteristics

Transmission characteristics	Cat. 6 <sub>A</sub> Class E <sub>A</sub> up to 500 MHz
Data rate	10 Gbit/s
	10 Mbit/s
	100 Mbit/s
	2.5 Gbit/s
	5 Gbit/s
	1 Gbit/s

## Material properties

RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	No

## Specifications and approvals

Specifications	IEC 61076-3-124
Approvals	DNV GL

## Commercial data

Packaging size	1
Net weight	12 g
Country of origin	Germany
European customs tariff number	85366990
eCl@ss	27440190 Industry connector (unspecified)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [HARTING](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)  
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)  
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)