


Male Double Row Horizontal PC Tail

- Mates with female connectors on pages 21 to 24.
- For British Standard versions see pages 18 to 19.
- Supplied with Strain Relief straps:
Order code M80-0030006.

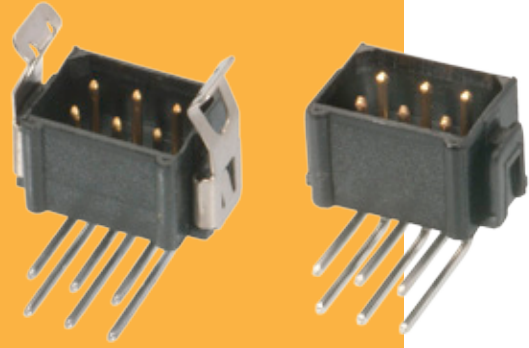

DATAMATE L-TEK

UNLATCHED		CALCULATION																																								
		<table border="1"> <tr> <td>A</td> <td>$B + 5.60$</td> </tr> <tr> <td>B</td> <td>Total no. of contacts - 2</td> </tr> </table>		A	$B + 5.60$	B	Total no. of contacts - 2																																			
A	$B + 5.60$																																									
B	Total no. of contacts - 2																																									
<p>Recommended PC Board Pattern</p>		<p>View of Strain Relief strap in place</p>																																								
LOCKING LATCH		FRICTION LATCH																																								
HOW TO ORDER																																										
M80 - XXX XX XX																																										
<table border="1"> <thead> <tr> <th colspan="2">SERIES CODE</th> <th></th> </tr> <tr> <th>RoHS </th> <th>Non-RoHS </th> <th></th> </tr> </thead> <tbody> <tr> <td>841</td> <td>868</td> <td>Unlatched (3mm tail)</td> </tr> <tr> <td>851</td> <td>866</td> <td>Locking Latch (3mm tail)</td> </tr> <tr> <td>839</td> <td>814</td> <td>Friction Latch (3mm tail)</td> </tr> <tr> <td>791</td> <td>791</td> <td>Unlatched (4.5mm tail)</td> </tr> <tr> <td>771</td> <td>771</td> <td>Locking Latch (4.5mm tail)</td> </tr> <tr> <td>789</td> <td>789</td> <td>Friction Latch (4.5mm tail)</td> </tr> </tbody> </table>		SERIES CODE			RoHS	Non-RoHS		841	868	Unlatched (3mm tail)	851	866	Locking Latch (3mm tail)	839	814	Friction Latch (3mm tail)	791	791	Unlatched (4.5mm tail)	771	771	Locking Latch (4.5mm tail)	789	789	Friction Latch (4.5mm tail)	<table border="1"> <thead> <tr> <th colspan="2">FINISH</th> <th></th> </tr> </thead> <tbody> <tr> <td>05</td> <td>Gold</td> <td></td> </tr> <tr> <td>22</td> <td>Gold + Tin/Lead</td> <td></td> </tr> <tr> <td>42</td> <td>Gold + Tin</td> <td></td> </tr> <tr> <td>45</td> <td>Gold</td> <td></td> </tr> </tbody> </table>		FINISH			05	Gold		22	Gold + Tin/Lead		42	Gold + Tin		45	Gold	
SERIES CODE																																										
RoHS	Non-RoHS																																									
841	868	Unlatched (3mm tail)																																								
851	866	Locking Latch (3mm tail)																																								
839	814	Friction Latch (3mm tail)																																								
791	791	Unlatched (4.5mm tail)																																								
771	771	Locking Latch (4.5mm tail)																																								
789	789	Friction Latch (4.5mm tail)																																								
FINISH																																										
05	Gold																																									
22	Gold + Tin/Lead																																									
42	Gold + Tin																																									
45	Gold																																									
		<table border="1"> <thead> <tr> <th>TOTAL NO. OF CONTACTS</th> </tr> </thead> <tbody> <tr> <td>04, 06, 08, 10, 12, 14, 16, 18, 20, 26, 34, 44</td> </tr> </tbody> </table>		TOTAL NO. OF CONTACTS	04, 06, 08, 10, 12, 14, 16, 18, 20, 26, 34, 44																																					
TOTAL NO. OF CONTACTS																																										
04, 06, 08, 10, 12, 14, 16, 18, 20, 26, 34, 44																																										

All dimensions in mm.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Harwin](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)