

CATEGORY	DESCRIPTION	P/N #
CONNECTOR	Modular Jack, 8P8C, R/A, With LED	MJ88-XX11-RNVLX

MJ88-XX11-RNVLX	
Table 2	
X	HOUSING
B	LCP BLACK
W	PA9T WHITE

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01	—	整理圖面	XSY	2015.5.11
A02	—	增加主體顏色	XSY	2018.05.21
A03	—	增加PLUG拉力管控	XSY	2018.06.21




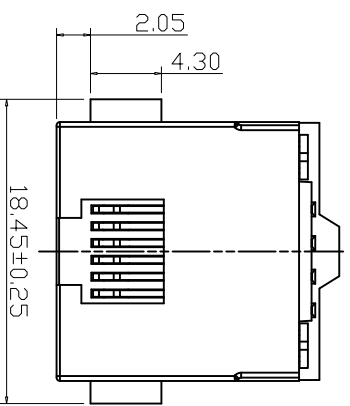



Table 1			
X	Terminal Plating	X	LED-L
0	Au 1u" Plating	1	Green
1	Au 3u" Plating	2	Yellow
2	Au 6u" Plating		
3	Au 15u" Plating		
4	Au 30u" Plating		

SPECIFICATION

- CURRENT RATING: 1.5AMPS
- VOLTAGE RATING: 125V AC
- INSULATION RESISTANCE: 500MΩ MIN.
- WITHSTAND VOLTAGE: AC1000V RMS 50Hz or 60Hz MIN.
- CONTACT RESISTANCE: 40mΩ MAX.
- DURABILITY: 750 MATING CYCLES
- OPERATING TEMPERATURE: -25°C~+70°C
- EXTRACTION FORCE: 6.0kgf MIN

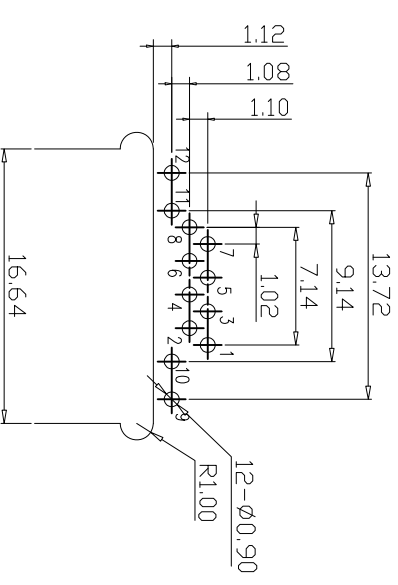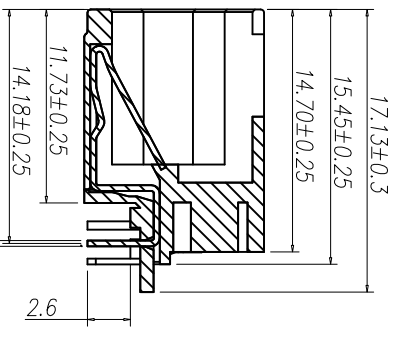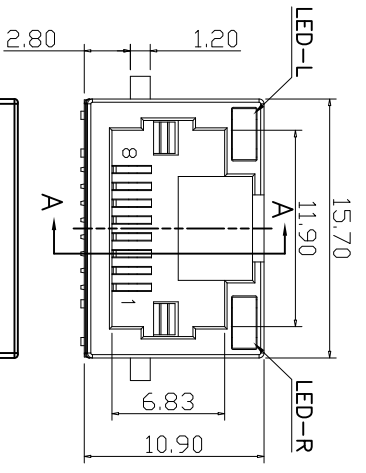

Recommend PCB Layout
Jack Top View
Tolerance: ±0.05mm
Recommend PCB Thickness: 1.6mm



e	LED-R	1	SEE TABLE 1	Table 1	
d	LED-L	1	SEE TABLE 1	Table 1	
c	COVER	1	Table 2	Table 2	
b	TERMINAL	8	PHOSPHOR BRONZE	Au/Tin PLATING	
a	HOUSING	1	Table 2	Table 2	
NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR	Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X : ±0.5 X : ±2°

X.X : ±0.3 X.X : ±1°

X.XX : ±0.2 X.XX : ±0.2

東莞市合陵電子有限公司
DongGuan Heling Electronic Co.,LTD

SCALE: 1/1 UNIT: mm DWG.NO: W-061-104

SIZE: A3 PAGE: 1 OF 1 REV: A03

APPROVED BY: XSY CHECKED BY: XSY PREPARED BY: XSY

DICK: XSY

CUSTOMER COPY

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modular Connectors](#) / [Ethernet Connectors](#) category:

Click to view products by [Heling](#) manufacturer:

Other Similar products are found below :

[8949-H88/06BLKA/SN](#) [74441-0010/BKN](#) [PHP-6P6C-5](#) [GAX-3-66](#) [GDCX-PN-66](#) [GLX-A-44](#) [GLX-N-1010M-BLK](#) [GLX-S-88M-BLK](#)
[GMX-SMT4-N-88](#) [GSGX-N-2-88](#) [GSGX-N-4-88](#) [GSX-NS2-88-3.05](#) [GSX-NS-88-3.68](#) [PT-108A-8C-UL](#) [PTS-J531-8CS-50UL](#) [A-2014-0-4](#)
[GWLX-S9-88-YG](#) [DC-1021-8-WH-6](#) [1300530003](#) [1324640-4](#) [132764-001](#) [1413235](#) [MPS88RX-5000](#) [E5288-S000K3-L](#) [155302-001](#)
[AX101050](#) [AX101063](#) [AX101065](#) [AX101072](#) [AX101307](#) [AX101315](#) [AX101318](#) [AX102271](#) [AX102277](#) [AX102651](#) [AX102660](#) [AX104024](#)
[203475](#) [PC4D0018P](#) [KIT38082NI](#) [8949-B88/6](#) [2-6609208-5](#) [30-8956](#) [30-8964-100](#) [SM85](#) [SM99S01VBNN04G7](#) [17-103540](#) [191587](#) [PDI-68-RV](#) [PHP-8P8C-S-5](#)