


Cu Earthing Strap

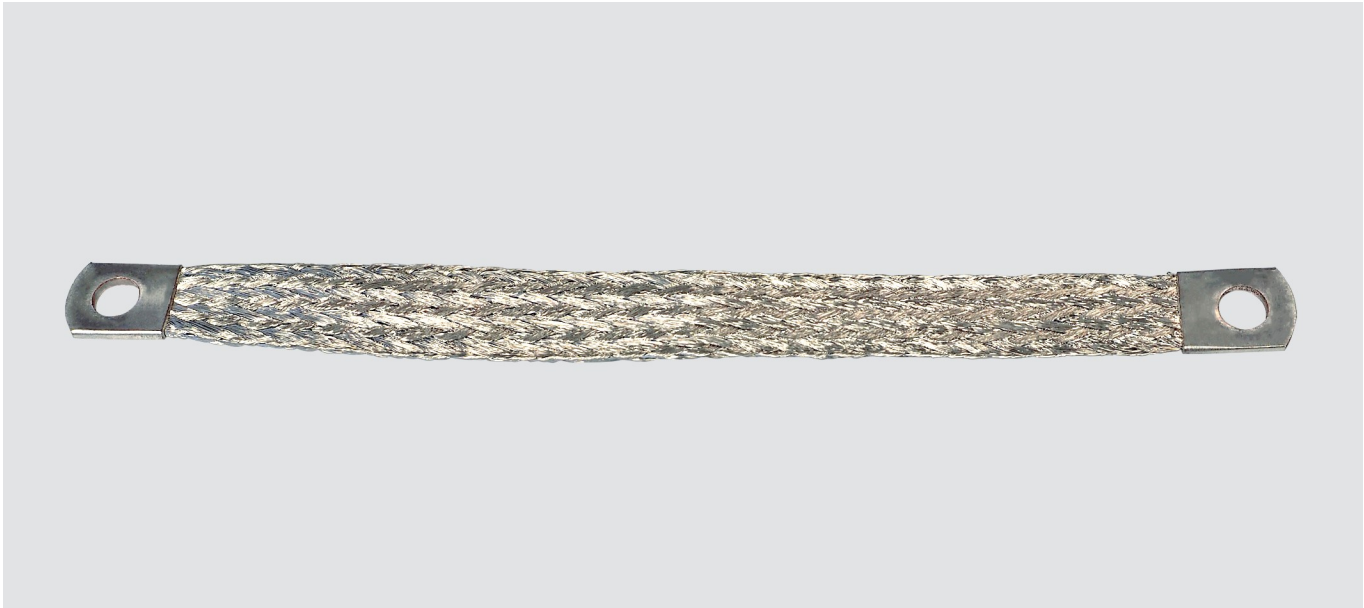

Cu Earthing Strap

- for EMC applications (interference elimination)
- rounded contacts

Application

- automobile industry
- robots
- control panel construction

Material

tinned copper

Note


- other lengths and inner diameters available on request

Technical data

Temperature range: -20°C up to +125°C

individual strand size: 0.2 mm

contact areas made of seamless, pressed ferrules

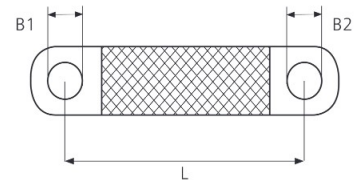

Part no.	Type	Cross-section mm ²	Length Drill hole in mm	Boring B1 in mm	Boring B2 in mm	Unit
11008412	HELU-MB-CUV-6-150-0507-R	6	150	4,5	6,5	50
11008411	HELU-MB-CUV-6-500-0707-R	6	500	6,5	6,5	50
11008421	HELU-MB-CUV-10-200-0707-R	10	200	6,5	6,5	50
11008422	HELU-MB-CUV-10-200-0909-R	10	200	8,5	8,5	50
11008423	HELU-MB-CUV-10-300-0707-R	10	300	6,5	6,5	50
11008424	HELU-MB-CUV-10-300-0909-R	10	300	8,5	8,5	50
11008425	HELU-MB-CUV-10-400-0909-R	10	400	8,5	8,5	50
11008442	HELU-MB-CUV-16-100-0909-R	16	100	8,5	8,5	50
11008443	HELU-MB-CUV-16-200-0707-R	16	200	6,5	6,5	50
11008445	HELU-MB-CUV-16-200-0709-R	16	200	6,5	8,5	50
11008378	HELU-MB-CUV-16-200-0909-R	16	200	8,5	8,5	50
11008446	HELU-MB-CUV-16-250-0709-R	16	250	6,5	8,5	50
11008444	HELU-MB-CUV-16-300-0707-R	16	300	6,5	6,5	50
11008447	HELU-MB-CUV-16-300-0709-R	16	300	6,5	8,5	50
11008379	HELU-MB-CUV-16-300-0909-R	16	300	8,5	8,5	50
11008441	HELU-MB-CUV-16-400-0909-R	16	400	8,5	8,5	50
11008448	HELU-MB-CUV-16-500-0909-R	16	500	8,5	8,5	50
11008449	HELU-MB-CUV-16-600-0909-R	16	600	8,5	8,5	50
11008450	HELU-MB-CUV-16-1200-0909-R	16	1200	8,5	8,5	50
11008461	HELU-MB-CUV-25-200-0909-R	25	200	8,5	8,5	50
11008462	HELU-MB-CUV-25-300-0909-R	25	300	8,5	8,5	50
11009170	HELU-MB-CUV-35-500-0909-R	35	500	8,5	8,5	50

Dimensions and specifications may be changed without prior notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Helukabel](#) manufacturer:

Other Similar products are found below :

[10001](#) [10003](#) [10004](#) [10005](#) [10007](#) [10008](#) [10009](#) [10010](#) [10011](#) [10012](#) [10013](#) [10014](#) [10015](#) [10016](#) [10018](#) [10019](#) [10020](#) [10022](#) [10023](#)
[10030](#) [10031](#) [10033](#) [10035](#) [10036](#) [10037](#) [10038](#) [10039](#) [10040](#) [10041](#) [10042](#) [10043](#) [10045](#) [10047](#) [10049](#) [10050](#) [10051](#) [10054](#) [10060](#)
[10061](#) [10062](#) [10063](#) [10065](#) [10067](#) [10068](#) [10069](#) [10070](#) [10071](#) [10072](#) [10073](#) [10074](#)