

H3-ADT16-6T+

0.3-70MHz 50Ω 1:16 Balun


APPLICATIONS

- Ideally suitable for CATV broadband applications.

FEATURES

- Surface mount
- Impedance ratio: 1:16
- Centre tap on secondary
- RoHS compliant and Pb free
- Available on tape and reel

DIMENSIONS




A	B	C
6.35	7.15	3.70
D		
2.54		

Unless otherwise stated dimensions are in mm


Tolerance: .xx ± 0.25, .xxx ± 0.05

Land Pattern



E	F	G
7.62	1.75	1.27
H		
2.54		

FUNCTIONAL SCHEMATIC



PIN CONFIGURATION

Pin No.	Function
1	Primary
2	NOT USED
3	Primary Dot
4	Secondary Dot
5	Secondary Centre Tap
6	Secondary





ELECTRICAL SPECIFICATIONS@25°C:

Parameters (P#: ENA PORT)	frequency band	Min.	Typ.	Max.	Unit
Port Impedance, Z0 (P1 / P2 / P3)			50		Ohm
Insertion Loss	0.3-70MHz		1.1	3.0	dB
	0.3-45MHz		0.8	2.0	dB
	0.3-33MHz		0.6	1.0	dB
Return Loss	0.3-70MHz		10.0		dB
	0.3-45MHz		14.0		dB
	0.3-33MHz		16.0		dB
Amplitude Balance	0.3-70MHz		0.1		dB
	0.3-45MHz		0.1		dB
	0.3-33MHz		0.1		dB
Phase UnBalance	0.3-70MHz		0.1		°
	0.3-45MHz		0.1		°
	0.3-33MHz		0.1		°

ABSOLUTE MAXIMUM RATINGS

Parameter	Value
RF Power	0.25W
DC Current	30mA
Operating Temperature Range	-20 to 85°C

TEST CURVE

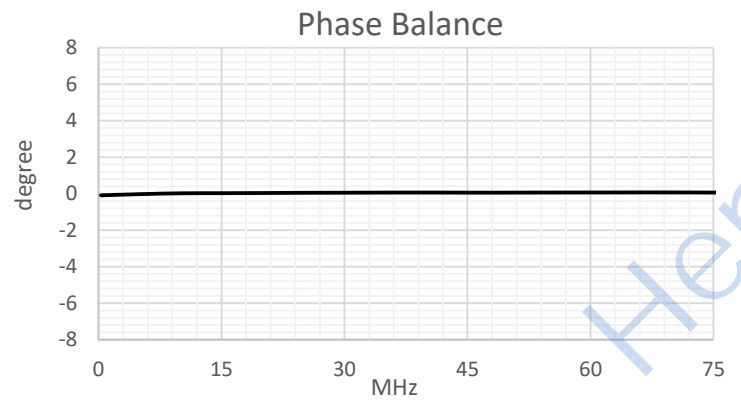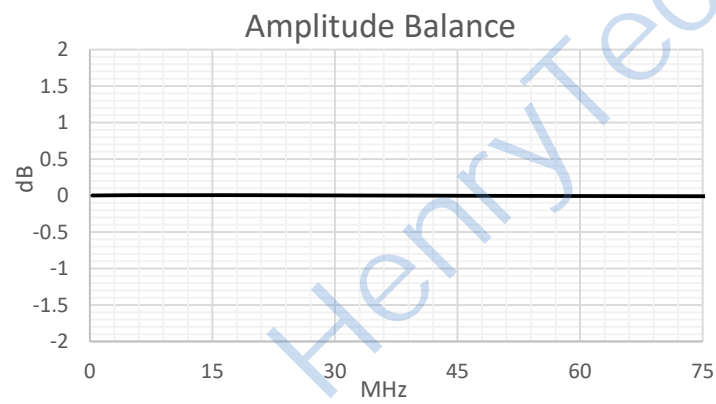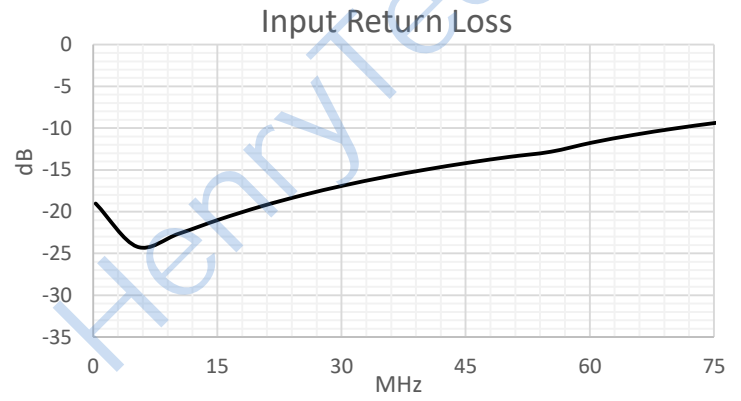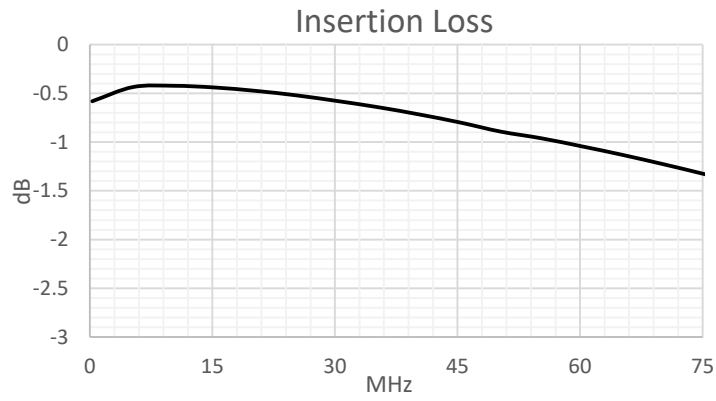

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [HenryTech](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [HHS-109-PIN](#) [AFS14A35-1591.50-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [FM-104-PIN](#) [CER0813B](#)

[MAPDCC0005](#) [3A325](#) [BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#)

[CDBLB455KCAX39-B0](#) [RF1353C](#) [051157-0000](#) [PD0922J5050D2HF](#) [600S150FTRB](#) [1E1305-3](#) [1F1304-3S](#) [TP-103-PIN](#)

[BD1222J50200AHF](#) [BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [DS-327-PIN](#) [MACP-008125-](#)

[CK07F0](#) [DS-329-PIN](#) [DS-313-PIN](#) [TP-104-PIN](#) [TP-101-PIN](#) [HH-128-PIN](#) [8594810000](#) [T-1000-N](#) [JP506S](#) [XC0900P-10S](#) [XC0900B-30S](#)

[CHE1260-QAG](#) [11305-10](#) [5962-9091202MXA](#) [3A412S](#) [X3C06A4-03S](#) [B39000Z3410A4](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#)

[B39242B4360P810](#) [B39781B8005P810](#)