




Heyco® Aluminum Solderless Connectors

- Compact design—lightweight yet strong.
- Electro-tin plated for low contact resistance and corrosion protection when used with copper conductors.
- Require no special installation tools.
- UL and CSA certified for use with copper and aluminum conductors.
- Ports are marked with catalog description and conductor range.
- DFARS Compliant

WIRE RANGE (AWG)	PART NO.	DESCRIPTION	PART DIMENSIONS						Bolt Size	
			A Width		B Length		C Height		in.	mm.
Single Conductor										
4-14	1863	A35	.50	12,7	1.06	26,9	.50	12,7		
2-14	1864	A90	.50	12,7	1.16	29,5	.56	14,2	1/4	6,4
1/0-14	1884	A125	.63	15,9	1.47	37,3	.78	19,8		
Two Conductors										
2-14	1864-2	A90-2	.91	23,0	1.16	29,5	.56	14,2	1/4	6,4
1/0-14	1884-2	A125-2	1.12	28,4	1.47	37,3	.78	19,8		

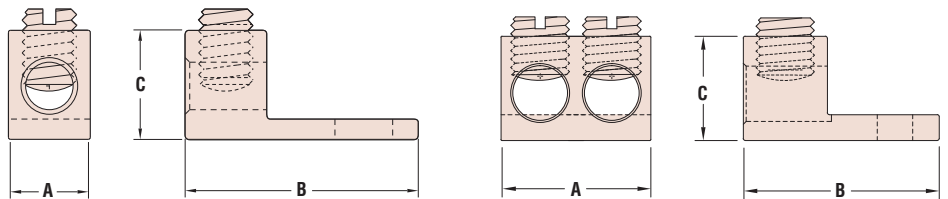


Heyco® Copper Lug Connectors

Copper Single Hole Offset Lugs

- 100% conductivity for highest efficiency.
- Completely reuseable.
- Require no special installation tools.
- UL listed and CSA certified for use with copper conductors.
- Marked with catalog description and conductor range.
- DFARS Compliant

WIRE RANGE (AWG)	PART NO.	DESCRIPTION	CURRENT RATING AMPS	HEIGHT WITH MAX. WIRE	PART DIMENSIONS				Bolt Size		
					A Tang Width		B Length		in.	mm.	
6-14	1851	CB 35	50	3/4	19,1	3/8	9,5	1-3/16	30,2	3/16	4,8

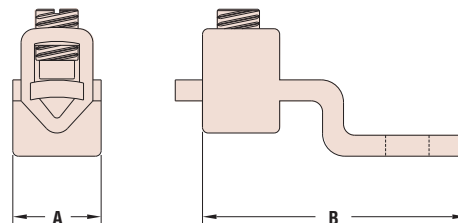

Quick Specs

Materials: 6061-T6 aluminum alloy; electrolytic copper
 Certifications: Listed under Underwriters' Laboratories File E80121
 Certified by the Canadian Standards Association File 242954 & 246619
 Flammability Rating: 94V-0

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Terminals](#) category:

Click to view products by [Heyco](#) manufacturer:

Other Similar products are found below :

[00-054007-01074-6](#) [00-054007-70206-1](#) [00-054007-70210-8](#) [00-054007-70217-7](#) [00-054007-70226-9](#) [00-054007-70228-3](#) [00-054007-70248-1](#) [00-054007-70256-6](#) [00-054007-70301-3](#) [00-054007-70316-7](#) [00-054007-49560-4](#) [00-054007-70209-2](#) [00-054007-70225-2](#) [00-054007-70227-6](#) [00-054007-70231-3](#) [00-054007-70241-2](#) [00-054007-70242-9](#) [00-054007-70244-3](#) [00-054007-70246-7](#) [00-054007-70263-4](#) [00-054007-70288-7](#) [00-054007-70290-0](#) [00-054007-70300-6](#) [00-054007-70304-4](#) [01-2065-1-0216](#) [01-2900-1-04412](#) [00581P0075](#) [600TS-10](#) [60205-1](#) [604200-1](#) [605601-1](#) [60598-1-CUT-TAPE](#) [61314-6-C](#) [61810-3](#) [61-S](#) [62149-1](#) [626-0194](#) [62-NBM-A](#) [62-SN](#) [62-SP](#) [640179-1](#) [M55155/059I03](#) [M55155/079C01](#) [M55155/099H02](#) [M55155/109H01](#) [M55155/109H02](#) [M55155/12XH05](#) [M55155/16XH02](#) [M55155/29-5S](#) [M55155/29XJ08](#)