





## Heyco® In-Line Strain Relief Bushing

- Quick and easy to secure on any SPT-2 wire.
- Cost effective. No cutting or tools needed as with metal clamp type strain reliefs. There is no risk of repetitive motion strain or injury.
- UL Recognized (far exceeds UL's 35# pull-out test).
- UL Approved for use with SPT-2 Wire.
- Replaces UL Knot method of providing strain relief.

WILL FIT THESE CABLES				PART DIMENSIONS								PART NO. Black	DESCRIPTION
UL Type	AWG/ Conductors	Approximate Size		A		B		C		D			
		in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.		
SPT-2	18/2	.150 x .280	3,8 x 7,1	.41	10,4	.70	17,8	.29	7,4	.35	8,9	<b>1854</b>	ISR 14-27

Standard color black. Consult Heyco for white and other colors.  
No panel required for application.

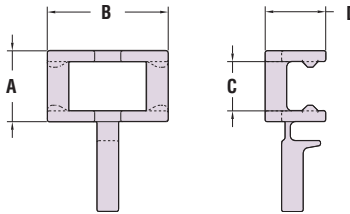

## Heyco® Strain Relief Bushings LabKit #1

(Part No. 1999)

### Use Heyco LabKits!

- Heyco LabKits are perfect for product design departments, experimental labs, and for all prototype work.
- Heyco LabKit #1 contains an assortment of our most popular Strain Relief Bushings.
- Heyco also offers lab kits for Liquid Tight Cordgrips, Bushings, Hole Plugs, HEYware, and Grommets.

*Quick Specs*

Material  
Certifications

Flammability Rating  
Temperature Range

Nylon 6/6  
 Recognized under Underwriters' Laboratories File E15331 (SRs Only)  
 Certified by the Canadian Standards Association File 8919 (SRs Only)  
 94V-2  
 -.04°F (-18°C) to 221°F (105°C)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cable Mounting & Accessories](#) category:*

*Click to view products by [Heyco](#) manufacturer:*

Other Similar products are found below :

[582603-1](#) [009333-000](#) [727844N003](#) [747](#) [809090N001](#) [843188-000](#) [8666](#) [967279N002](#) [DB-11](#) [1300840039](#) [1300900096](#) [1301800416](#)  
[1302264450](#) [1300830184](#) [1300830729](#) [1300900039](#) [1301580036](#) [1301850553](#) [1301860939](#) [1302000074](#) [1302261315](#) [1302264431](#)  
[1337706-2](#) [APA18-AK](#) [1724](#) [1-787307-1](#) [185491N001](#) [1868](#) [HP-6N](#) [C-202-C](#) [202C221-13-0](#) [CA7308-000](#) [8S23-75FR-CS8184](#) [2684](#) [9648](#)  
[3089](#) [988382-000](#) [A72821-000](#) [AA401](#) [173506-000](#) [202C292-13-0](#) [202C302-13-0](#) [2109](#) [300625](#) [3330](#) [3412](#) [M9142](#) [M9143](#) [529732-000](#)  
[561-50D1187](#)