
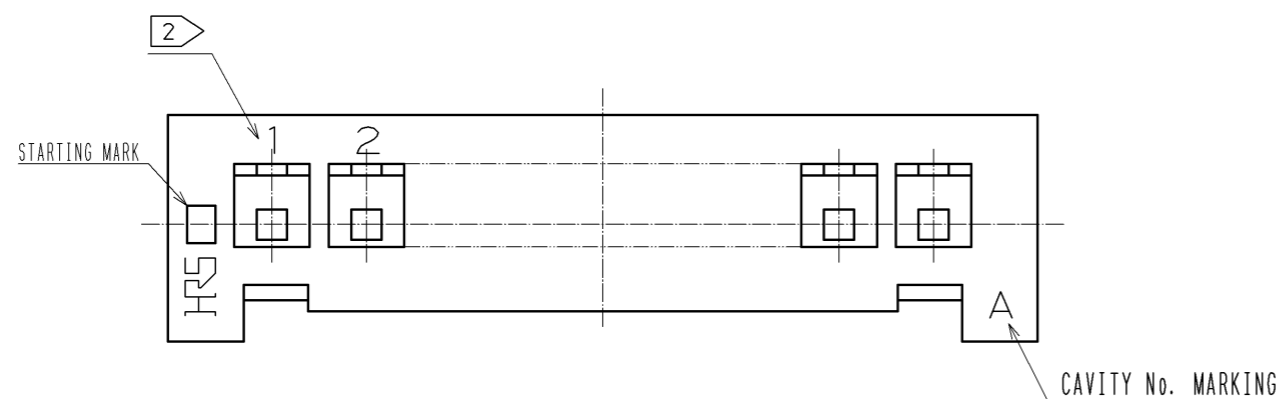
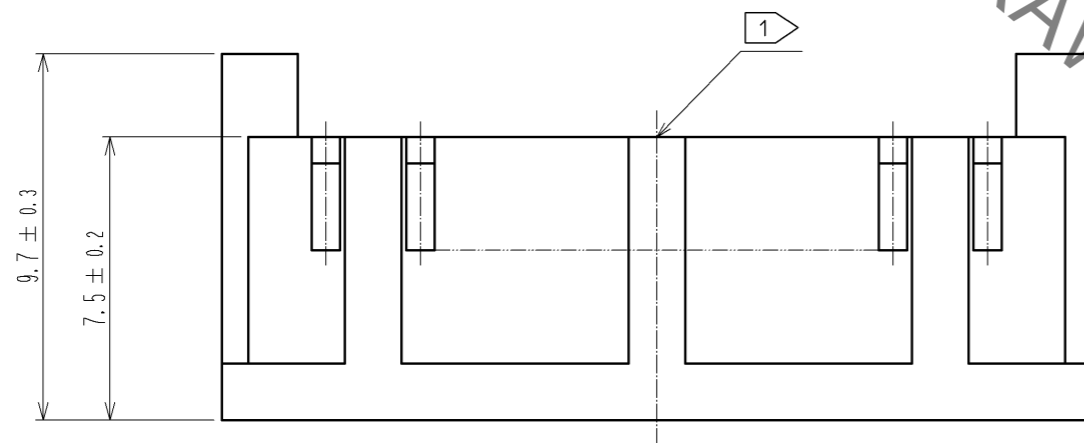


Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

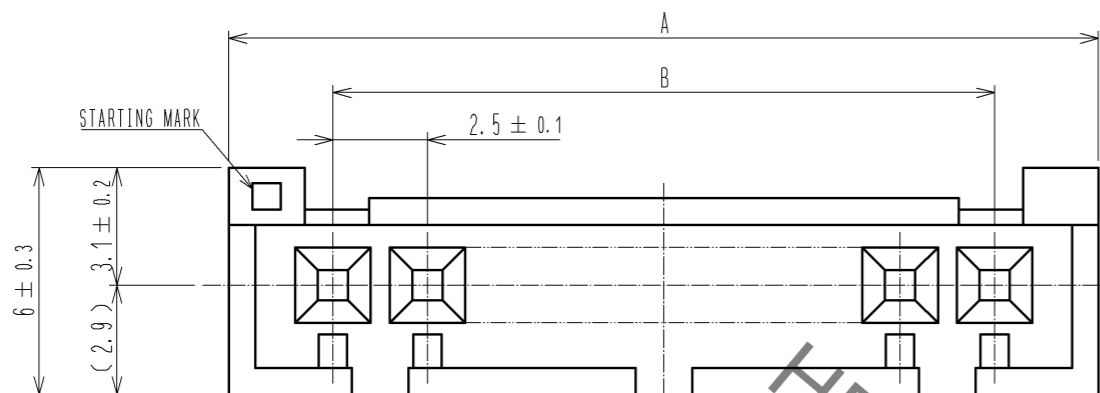

CODE No.	PART No.	CONTACT	A	B
CL541-0136-9	DF1-2S-2.5C	2	8.0±0.3	2.5±0.2
CL541-0137-1	DF1-3S-2.5C	3	10.5±0.3	5.0±0.2
CL541-0138-4	DF1-4S-2.5C	4	13.0±0.3	7.5±0.2
CL541-0139-7	DF1-5S-2.5C	5	15.5±0.3	10.0±0.2
CL541-0140-6	DF1-6S-2.5C	6	18.0±0.3	12.5±0.2
CL541-0141-9	DF1-7S-2.5C	7	20.5±0.3	15.0±0.2
CL541-0142-1	DF1-8S-2.5C	8	23.0±0.3	17.5±0.2
CL541-0143-4	DF1-9S-2.5C	9	25.5±0.3	20.0±0.2
CL541-0144-7	DF1-10S-2.5C	10	28.0±0.3	22.5±0.2
CL541-0145-0	DF1-11S-2.5C	11	30.5±0.3	25.0±0.2
CL541-0146-2	DF1-12S-2.5C	12	33.0±0.3	27.5±0.2
CL541-0147-5	DF1-13S-2.5C	13	35.5±0.4	30.0±0.4
CL541-0148-8	DF1-14S-2.5C	14	38.0±0.4	32.5±0.4
CL541-0149-0	DF1-15S-2.5C	15	40.5±0.4	35.0±0.4
CL541-0150-0	DF1-16S-2.5C	16	43.0±0.4	37.5±0.4
CL541-0152-5	DF1-18S-2.5C	18	48.0±0.4	42.5±0.4
CL541-0154-0	DF1-20S-2.5C	20	53.0±0.4	47.5±0.4

① NO RAISE AT THE CENTER OF THE HOUSING FOR 3, 4, 5, 6 AND 7 POS. FOR 2 POS., SINGLE RAISE IS PROVIDED AT THE CENTER.

② PIN No. MARKING (1, 2, 3, 4... 20)

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
			1	POLYAMIDE	LIGHT BROWN. UL94V-0

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	△				
HIROSE ELECTRIC CO., LTD.			APPROVED : KI. AKIYAMA	10.05.11	DRAWING NO. EDC3-162414-01	
			CHECKED : HK. UMEHARA	10.05.11	PART NO. DF1-*S-2.5C	
			DESIGNED : HT. SATO	10.05.11	CODE NO. CL541-	
			DRAWN : MI. SAKIMURA	10.05.11	△ 1/1	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Hirose](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)  
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)  
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)