

NOTES 1: If there are pattern and a bia hole on part, there is a possibility that it will make contact with the leads.
 2: Lead co-planality include reinforced metal fittings shall be 0.1mm MAX.


Part No.	Number of contacts	Code No.	A	B	C
DF 13EA-10DP-1.25V(55)	10	CL536-0570-0-55	12.1	5.0	8.7
DF 13EA-20DP-1.25V(55)	20	CL536-0571-0-55	18.35	11.25	14.95
DF 13EA-30DP-1.25V(55)	30	CL536-0572-0-55	24.60	17.50	21.20
DF 13EA-40DP-1.25V(55)	40	CL536-0573-0-55	30.85	23.75	27.45

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
2	Brass		Contact area:Gold plated 0.2µm MIN Lead area:Tin-copper plated 1µm MIN Under plating:Nickel 1µm MIN	5	S. PVC		Gray
1	Polyamide		Beige,UL94V-0	4	R. PVC		Electrostatic protection
				3	Phosphor bronze		Tin plated 1µm MIN

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	1	DIS-H-00002149	MI. SAKIMURA	TS. FUKUSHIMA	16.09.26

APPROVED	CHECKED	DESIGNED	DRAWN	DATE	DRAWING NO.	PART NO.	CODE NO.
·KI. AKIYAMA	·TS. FUKUSHIMA	·MI. SAKIMURA	·MI. SAKIMURA	16.03.31	16.03.29	16.03.29	16.03.29
					EDC-367982-55-00	DF13EA-*DP-1.25V(55)	CL536-

May.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

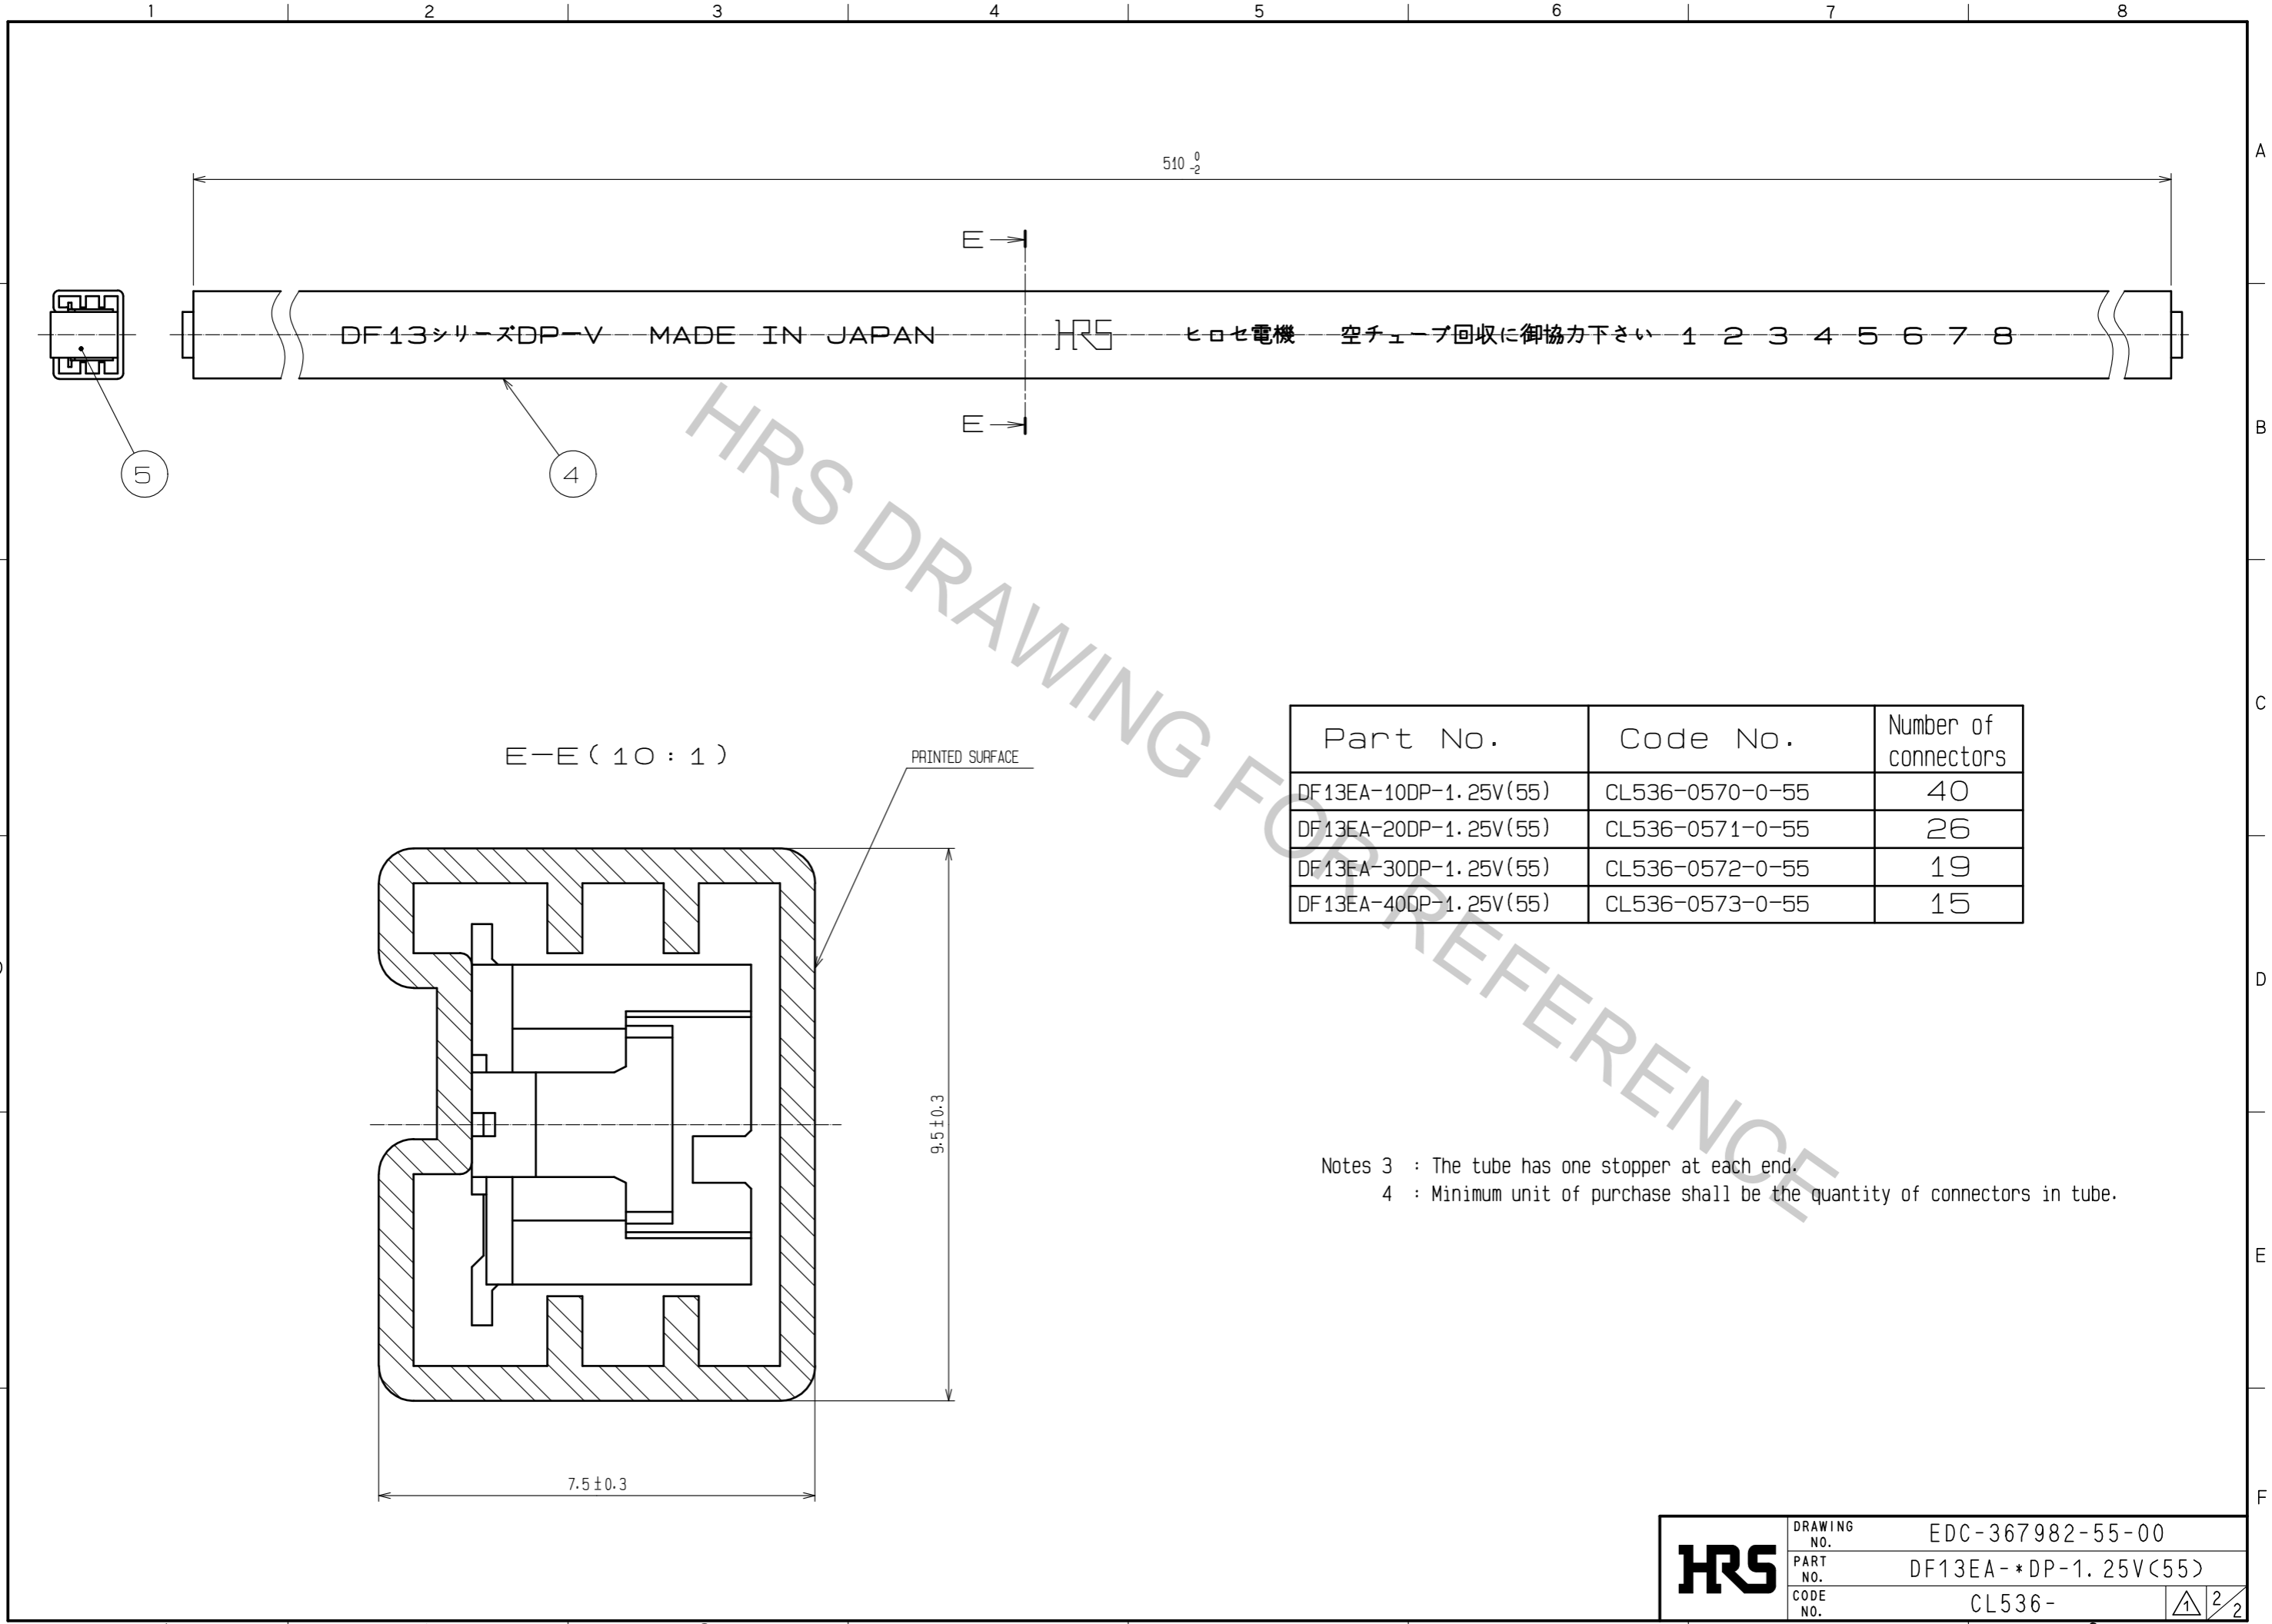

DF13シリーズDP-V MADE IN JAPAN HRS ヒロセ電機 空チューブ回収に御協力下さい 1 2 3 4 5 6 7 8

510 $\begin{smallmatrix} 0 \\ -2 \end{smallmatrix}$

E-E (10 : 1)

PRINTED SURFACE

9.5 ± 0.3

7.5 ± 0.3

Part No.	Code No.	Number of connectors
DF13EA-10DP-1.25V(55)	CL536-0570-0-55	40
DF13EA-20DP-1.25V(55)	CL536-0571-0-55	26
DF13EA-30DP-1.25V(55)	CL536-0572-0-55	19
DF13EA-40DP-1.25V(55)	CL536-0573-0-55	15

Notes 3 : The tube has one stopper at each end.
 4 : Minimum unit of purchase shall be the quantity of connectors in tube.

HRS	DRAWING NO.	EDC-367982-55-00	
	PART NO.	DF13EA-*DP-1.25V(55)	
	CODE NO.	CL536-	$\frac{2}{2}$

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Hirose](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)