


製品名	製品番号	A	B	C	D	E
DF3E- 2P-2V(21)	CL543-0357-0-21	4.6	2.0	8.5	4.8	8.74
DF3E- 3P-2V(21)	CL543-0358-0-21	6.6	4.0	10.5	6.8	10.74
DF3E- 4P-2V(21)	CL543-0359-0-21	8.6	6.0	12.5	8.8	12.74
DF3E- 5P-2V(21)	CL543-0360-0-21	10.6	8.0	14.5	10.8	14.74
DF3E- 6P-2V(21)	CL543-0361-0-21	12.6	10.0	16.5	12.8	16.74
DF3E- 7P-2V(21)	—	14.6	12.0	18.5	14.8	18.74
DF3E- 8P-2V(21)	CL543-0363-0-21	16.6	14.0	20.5	16.8	20.74
DF3E- 9P-2V(21)	—	18.6	16.0	22.5	18.8	22.74
DF3E-10P-2V(21)	CL543-0365-0-21	20.6	18.0	24.5	20.8	24.74
DF3E-11P-2V(21)	CL543-0366-0-21	22.6	20.0	26.5	22.8	26.74
DF3E-12P-2V(21)	—	24.6	22.0	28.5	24.8	28.74
DF3E-13P-2V(21)	—	26.6	24.0	30.5	26.8	30.74
DF3E-14P-2V(21)	—	28.6	26.0	32.5	28.8	32.74
DF3E-15P-2V(21)	—	30.6	28.0	34.5	30.8	34.74

- Notes
- ① It shows configuration of 2 to 6 position.
 - ② If there is pattern on part, there is a possibility that it will make contact with the leads.
 - ③ Lead co-planarity include reinforced metal fittings shall be 0.1mm MAX.

NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS
2	Brass	Surface: Tin plated 1μm MIN Under plating: Copper plated 0.5μm MIN		5	Polyester		Clear(Cover tape)
1	Polyamide	Natural(Beige), UL94V-0		4	PS		Clear(Embossed carrier tape)
				3	Brass		Surface: Tin plated 1μm MIN (Under plating) Nickel plated 1μm MIN

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	△				

HRS HIROSE ELECTRIC CO., LTD.	APPROVED : KI. AKIYAMA	16.03.23	DRAWING NO.	EDC-367607-21-00
	CHECKED : TS. FUKUSHIMA	16.03.22	PART NO.	DF3E-*P-2V(21)
	DESIGNED : HT. SATO	16.03.18	CODE NO.	CL543-
	DRAWN : HT. SATO	16.03.18		

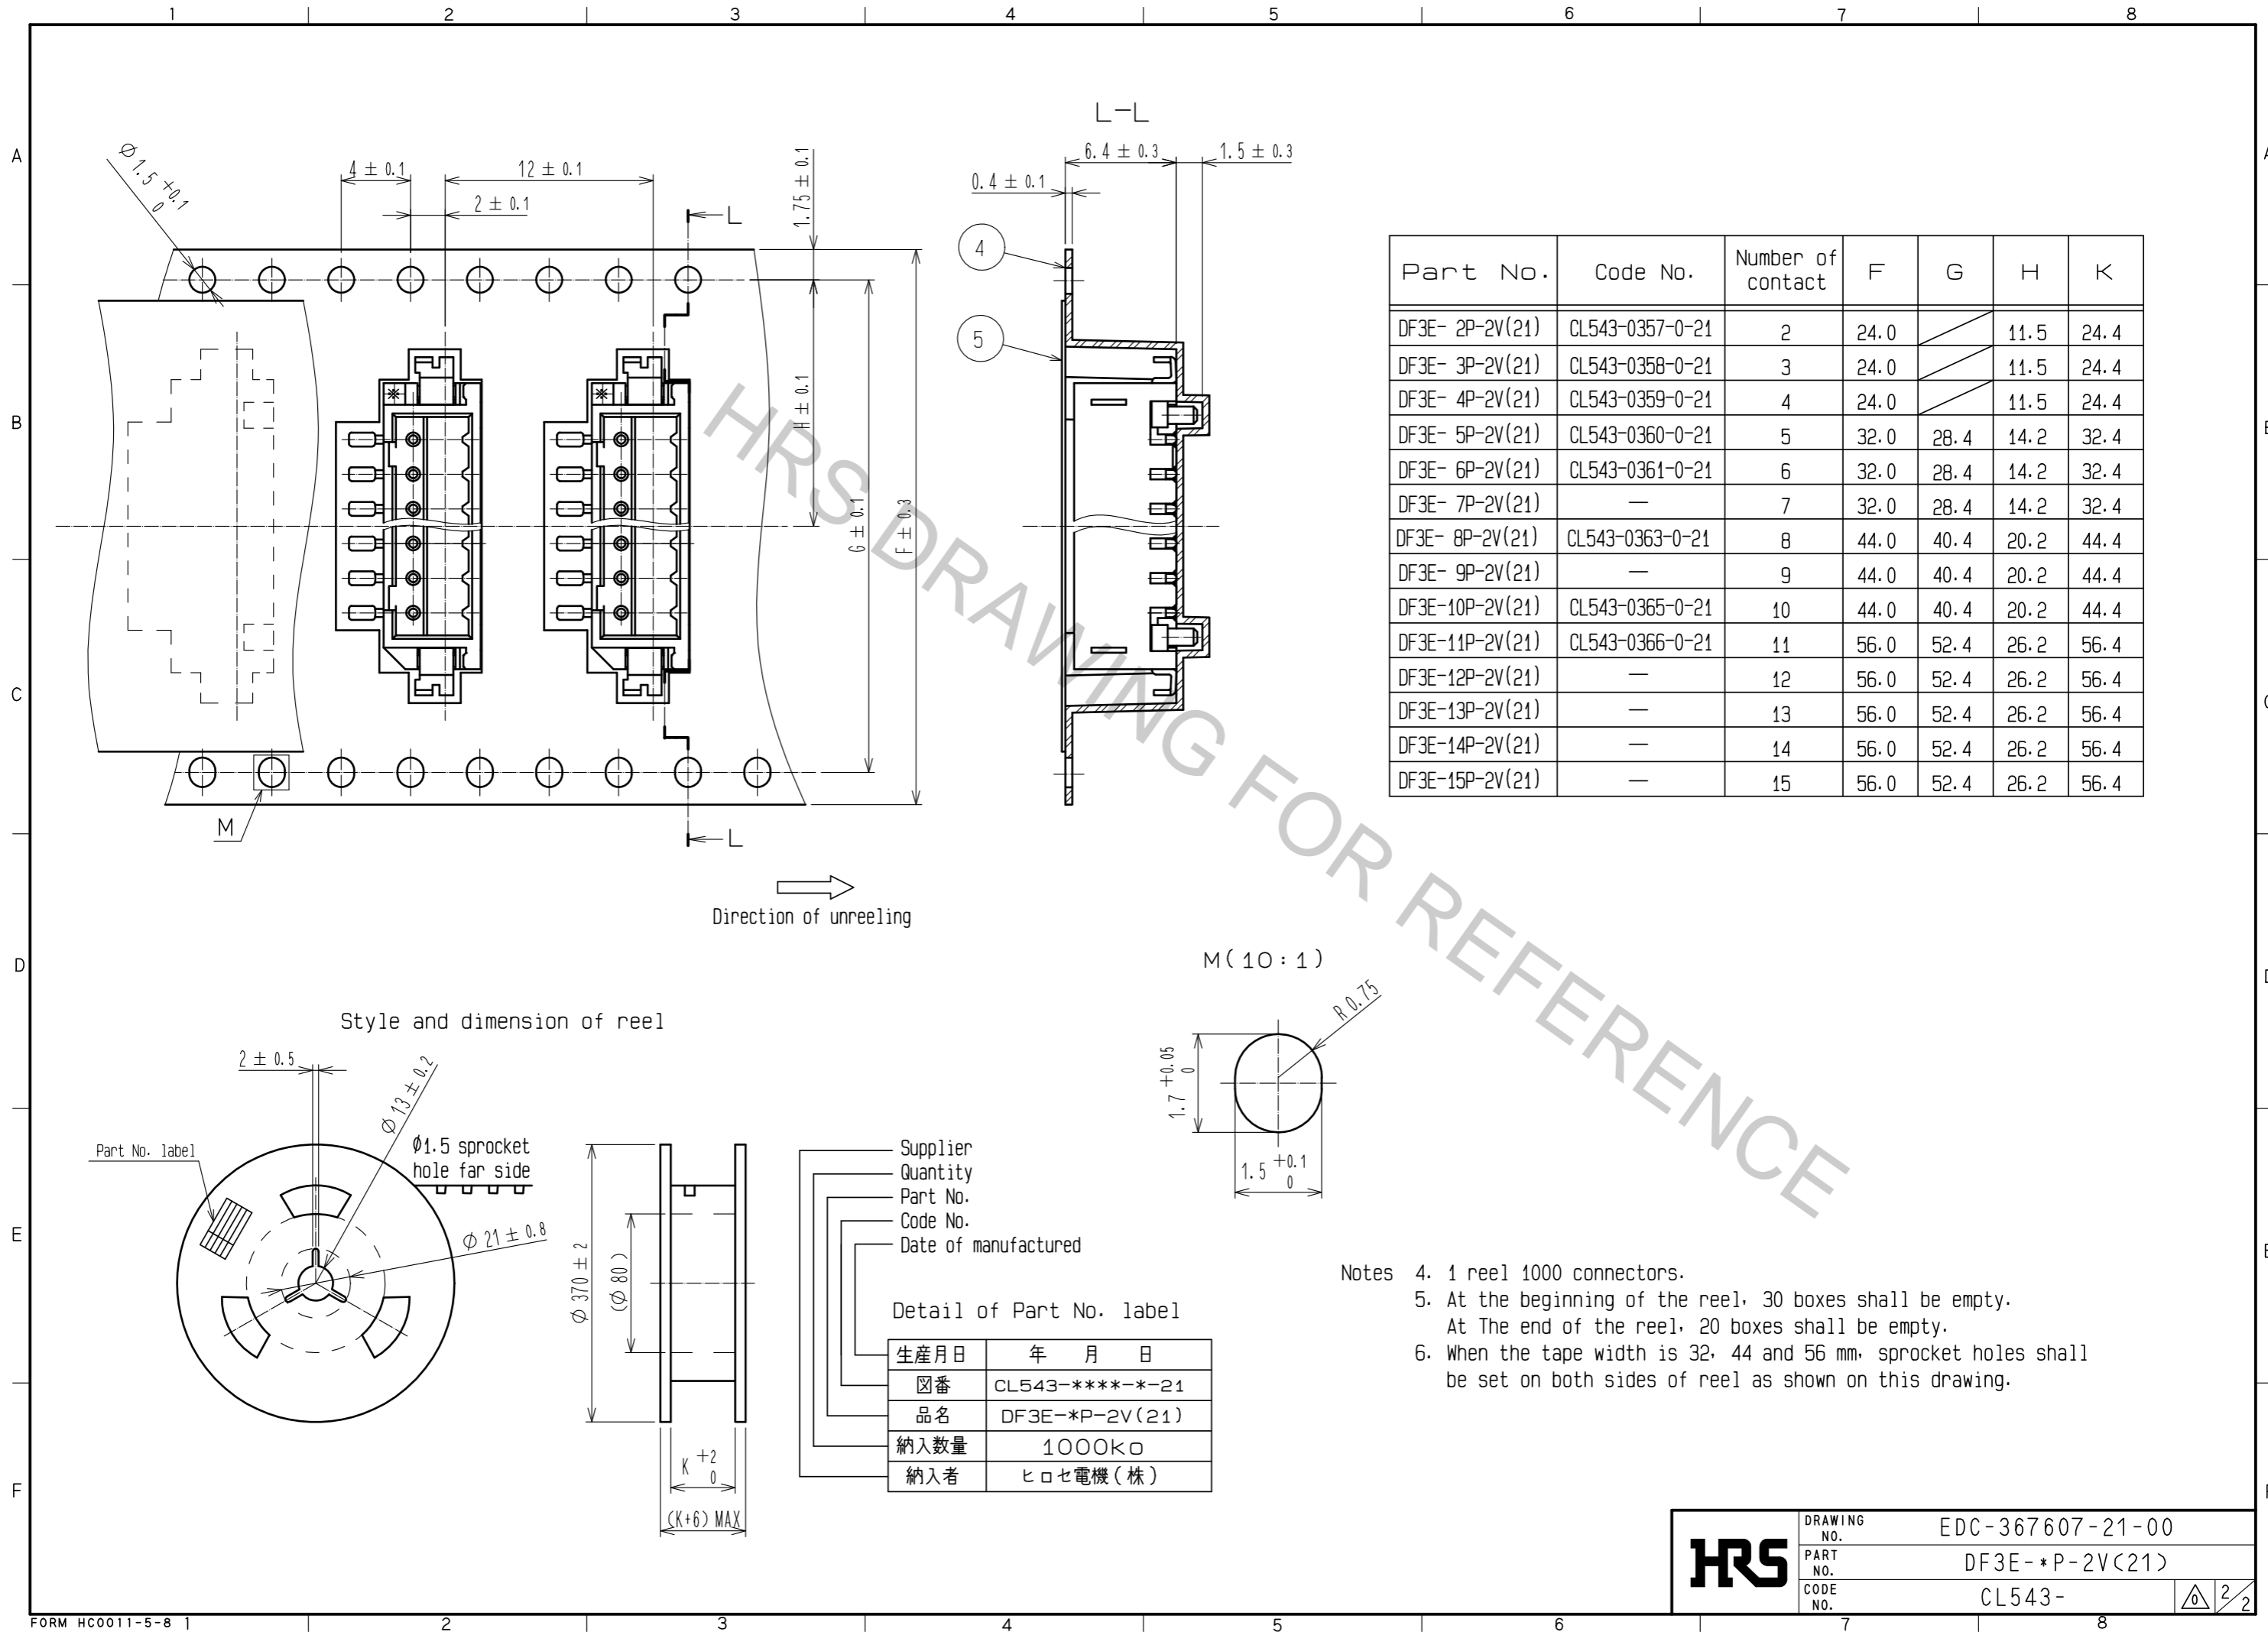

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Hirose](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)