


Aug.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.





COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

RECOMMEND PC BOARD HOLE PATTERN ( MOUNTING SIDE )  
 $t=1.6$

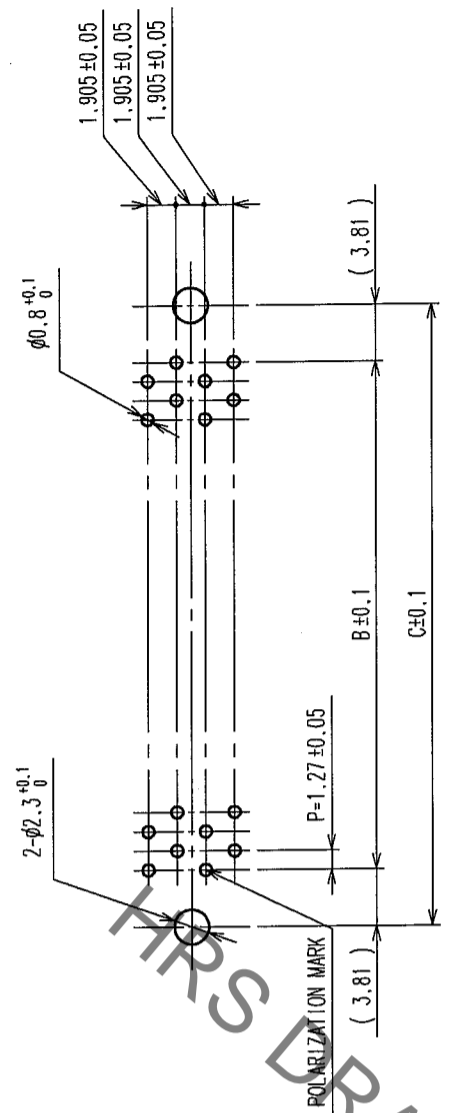

PART No.	CODE No.	A	B	C	D
FX2CA-20P-1.27DSAL (71)	CL572-2351-0-71	20	22.75	11.43	19.05
FX2CA-32P-1.27DSAL (71)	CL572-2352-3-71	32	30.37	19.05	26.67
FX2CA-40P-1.27DSAL (71)	CL572-2353-6-71	40	35.45	24.13	31.75
FX2CA-52P-1.27DSAL (71)	CL572-2354-9-71	52	43.07	31.75	39.37
FX2CA-60P-1.27DSAL (71)	CL572-2355-1-71	60	48.15	36.83	44.45
FX2CA-68P-1.27DSAL (71)	CL572-2356-4-71	68	53.23	41.91	49.53
FX2CA-80P-1.27DSAL (71)	CL572-2357-7-71	80	60.85	49.53	57.15
FX2CA-100P-1.27DSAL (71)	CL572-2358-0-71	100	73.55	62.23	69.85
FX2CA-120P-1.27DSAL (71)	CL572-2359-2-71	120	86.25	74.93	82.55

NOTES 1. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.  
 2. NUMBER OF PIN.

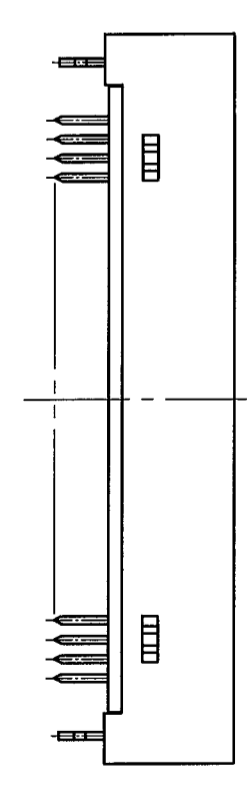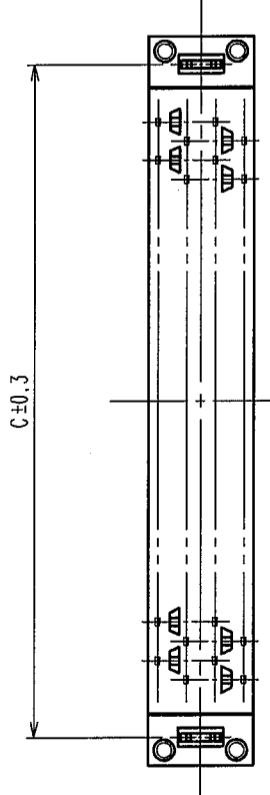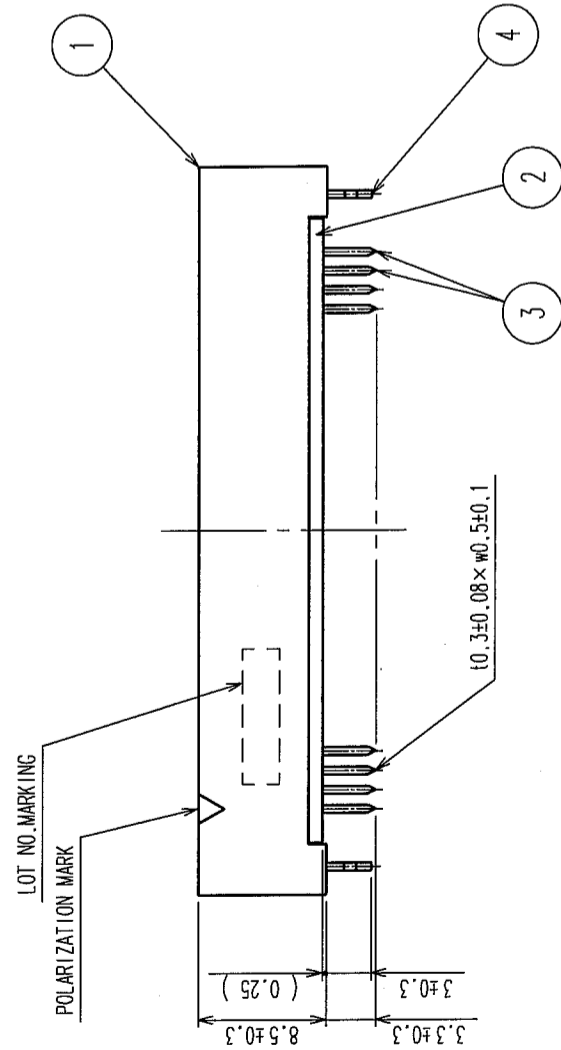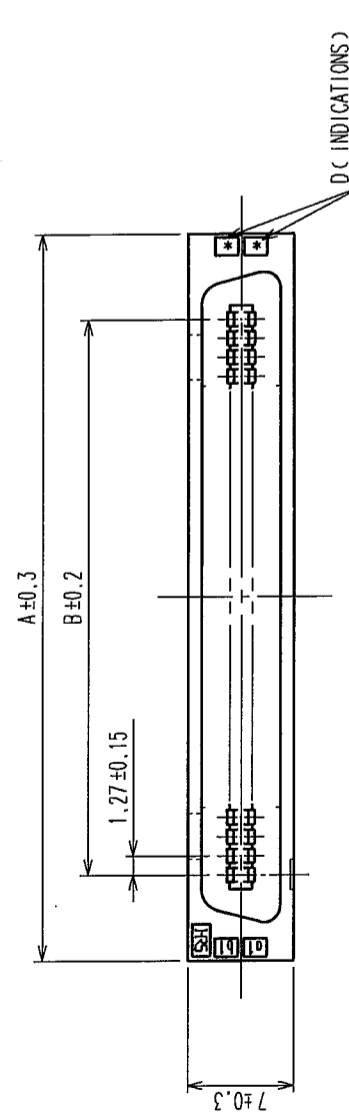

NO.	MATERIAL	TIN-PLATING	BLACK	UL94V-0	FINISH, REMARKS	NO.	MATERIAL	DESIGNED	CHECKED	APPROVED	RELEASED
4	PHOSPHOR BRONZE	TIN-PLATING				3	PHOSPHOR BRONZE				
1,2	POLYAMIDE										
CONTACT AREA: GOLD 0.2μm min		DIP AREA: TIN-PLATING 2μm min		UNDER PLATING: NICKEL 2μm min		FINISH, REMARKS					
DRAWING NO. EDC3-083052-21		DRAWN I.OKAYAMA		DESIGNED K.NAKAMURA		CHECKED H.OKAWA		APPROVED H.OKAWA		RELEASED	
SCALE FREE		CODE NO. (OLD) CL		PART NO. FX2CA-20P-1.27DSAL (71)		CODE NO. CL572					
UNITS mm		HIROSE ELECTRIC CO., LTD		HIROSE ELECTRIC CO., LTD		HIROSE ELECTRIC CO., LTD					

TO	
PCK	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:*

*Click to view products by [Hirose](#) manufacturer:*

Other Similar products are found below :

[589158040000018](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [2-22603-0](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68682-310LF](#) [68684-306](#) [75140-7012](#) [87471-650](#) [YTW-30-07-H-Q-410-140](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [FCN-268M024-G/3D](#) [FCN-268M036-G/BD](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [AXE816124](#) [AXE720127](#) [354184](#) [MIT-019-04-F-D-K](#) [P50-028-DDS-TG](#)