


Aug.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

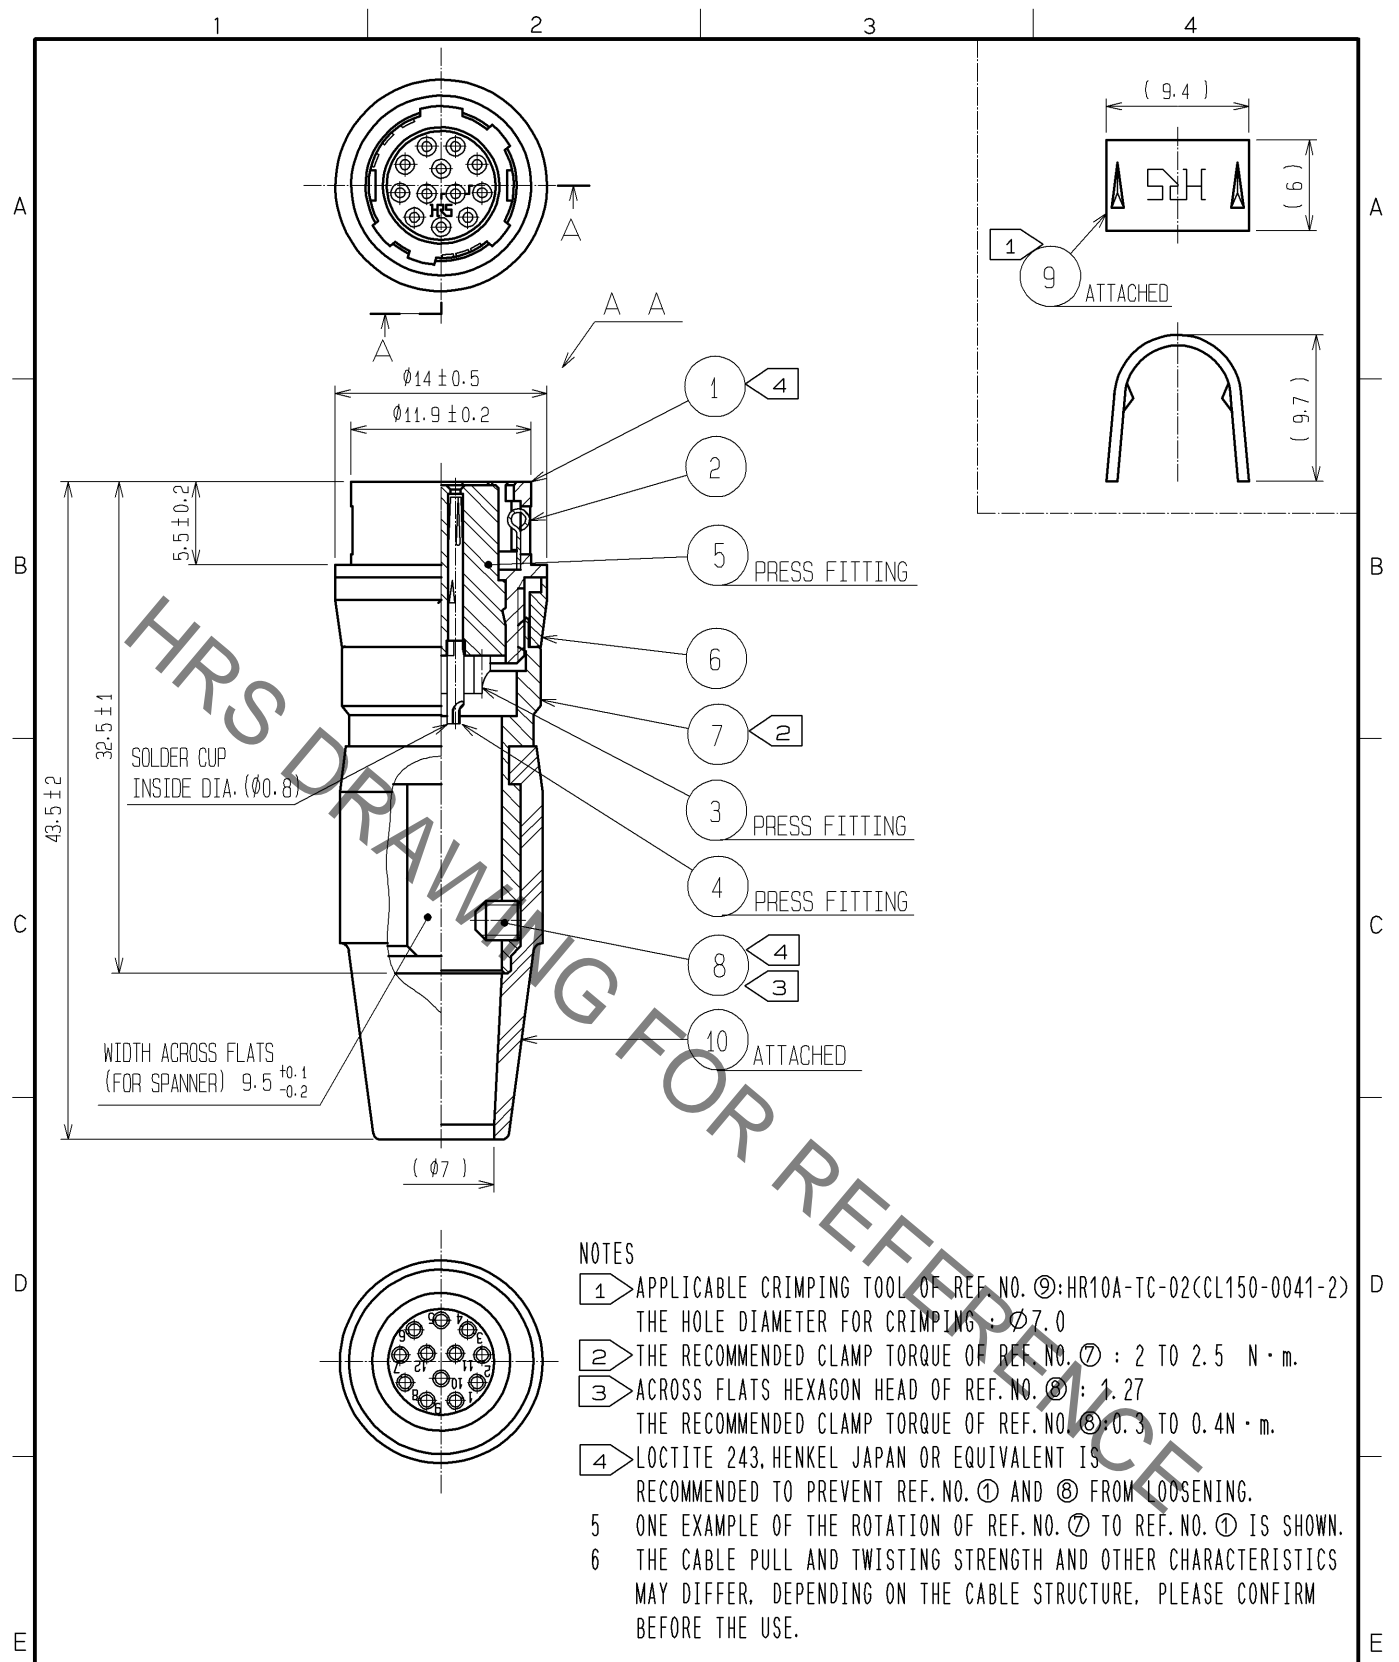

- NOTES
- ① APPLICABLE CRIMPING TOOL OF REF. NO. ⑨: HR10A-TC-02(CL150-0041-2)
THE HOLE DIAMETER FOR CRIMPING : $\phi 7.0$
 - ② THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑦ : 2 TO 2.5 N · m.
 - ③ ACROSS FLATS HEXAGON HEAD OF REF. NO. ⑩ : 1.27
THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑩ : 0.3 TO 0.4N · m.
 - ④ LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. ① AND ⑧ FROM LOOSENING.
 - 5 ONE EXAMPLE OF THE ROTATION OF REF. NO. ⑦ TO REF. NO. ① IS SHOWN.
 - 6 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE, PLEASE CONFIRM BEFORE THE USE.

5	POLYAMIDE	(BLACK) UL94V-0	10	CHLOROPRENE RUBBER (BLACK)	
4	PHOSPHOR BRONZE	SILVER PLATING 2μm min.	9	BRASS	
3	PHOSPHOR BRONZE		8	STEEL NICKEL PLATING HEXAGON SOCKET SET SCREW M2.6X0.45X3	
2	STAINLESS STEEL		7	BRASS MATTE FINISH NICKEL PLATED	
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	6	BRASS MATTE FINISH NICKEL PLATED	
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : EJ. KUNII	12.11.26	DRAWING NO.	EDC4-042722-73		
		CHECKED : HY. KISHI	12.11.26	PART NO.	HR10G-10J-12S(73)		
		DESIGNED : HS. NAGANO	12.11.26	CODE NO.	CL110-1619-7-73		
		DRAWN : HS. NAGANO	12.11.26		1/1		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Push Pull Connectors](#) category:

Click to view products by [Hirose](#) manufacturer:

Other Similar products are found below :

[6407-249V-11273P](#) [6408-201V-13273](#) [6408-202V-13343](#) [6408-202V-17343](#) [EZG.0B.309.CLN](#) [FFA.2S.310.ZLA](#) [FGA.1B.307.CYCD72Z](#)
[FGJ.1B.304.CLLD76](#) [FGJ.1B.306.CWLD72](#) [FGJ.2B.302.CYMD82Z](#) [FGJ.2B.310.CYMD72Z](#) [FGJ.3B.304.CYMD10Z](#)
[FGJ.3B.304.CYMD82Z](#) [FHJ.2B.310.CLLD72](#) [PCS.01.250.DLLE24](#) [PHG.0K.305.CYMC40Z](#) [PHG.1K.308.CLLK85](#) [PKG.M0.6BL.LZ](#)
[PLC.M1.0SL.LA](#) [GMA.10.290.DN](#) [GMA.3B.090.DA](#) [PRG.M0.6GL.LC52GZ](#) [PSA.1S.275.CTLC66](#) [ABF.1S.250.NTA](#) [133020F](#)
[1331ER193MZ](#) [1332M107MZ](#) [DTS26Z19-32JA-LC](#) [DTS26Z19-32SA](#) [DTS26Z19-32SA-LC](#) [DTS26Z23-55HA](#) [DTS26Z23-55HA-LC](#)
[DTS26Z23-55JA-LC](#) [EAJ.1B.306.CWA](#) [ECG.XB.312.CLL](#) [1589430-2](#) [EEA.0B.305.CLN](#) [EEA.0B.309.CLL](#) [ELF.00.250.NTL](#)
[ERA.01.250.DLL](#) [BRD.0B.200.PCSG](#) [BRR.2S.200.PZVG](#) [HR10A-P](#) [CAH.M34.SLL.C72GZ](#) [CAJ.M34.SLL.C72GZ](#) [300500](#)
[ESB.00.303.NLL](#) [EXG.0B.309.HLN](#) [FFB.1S.250.CLAC27](#) [FFG.1B.306.CLAZ](#)