


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

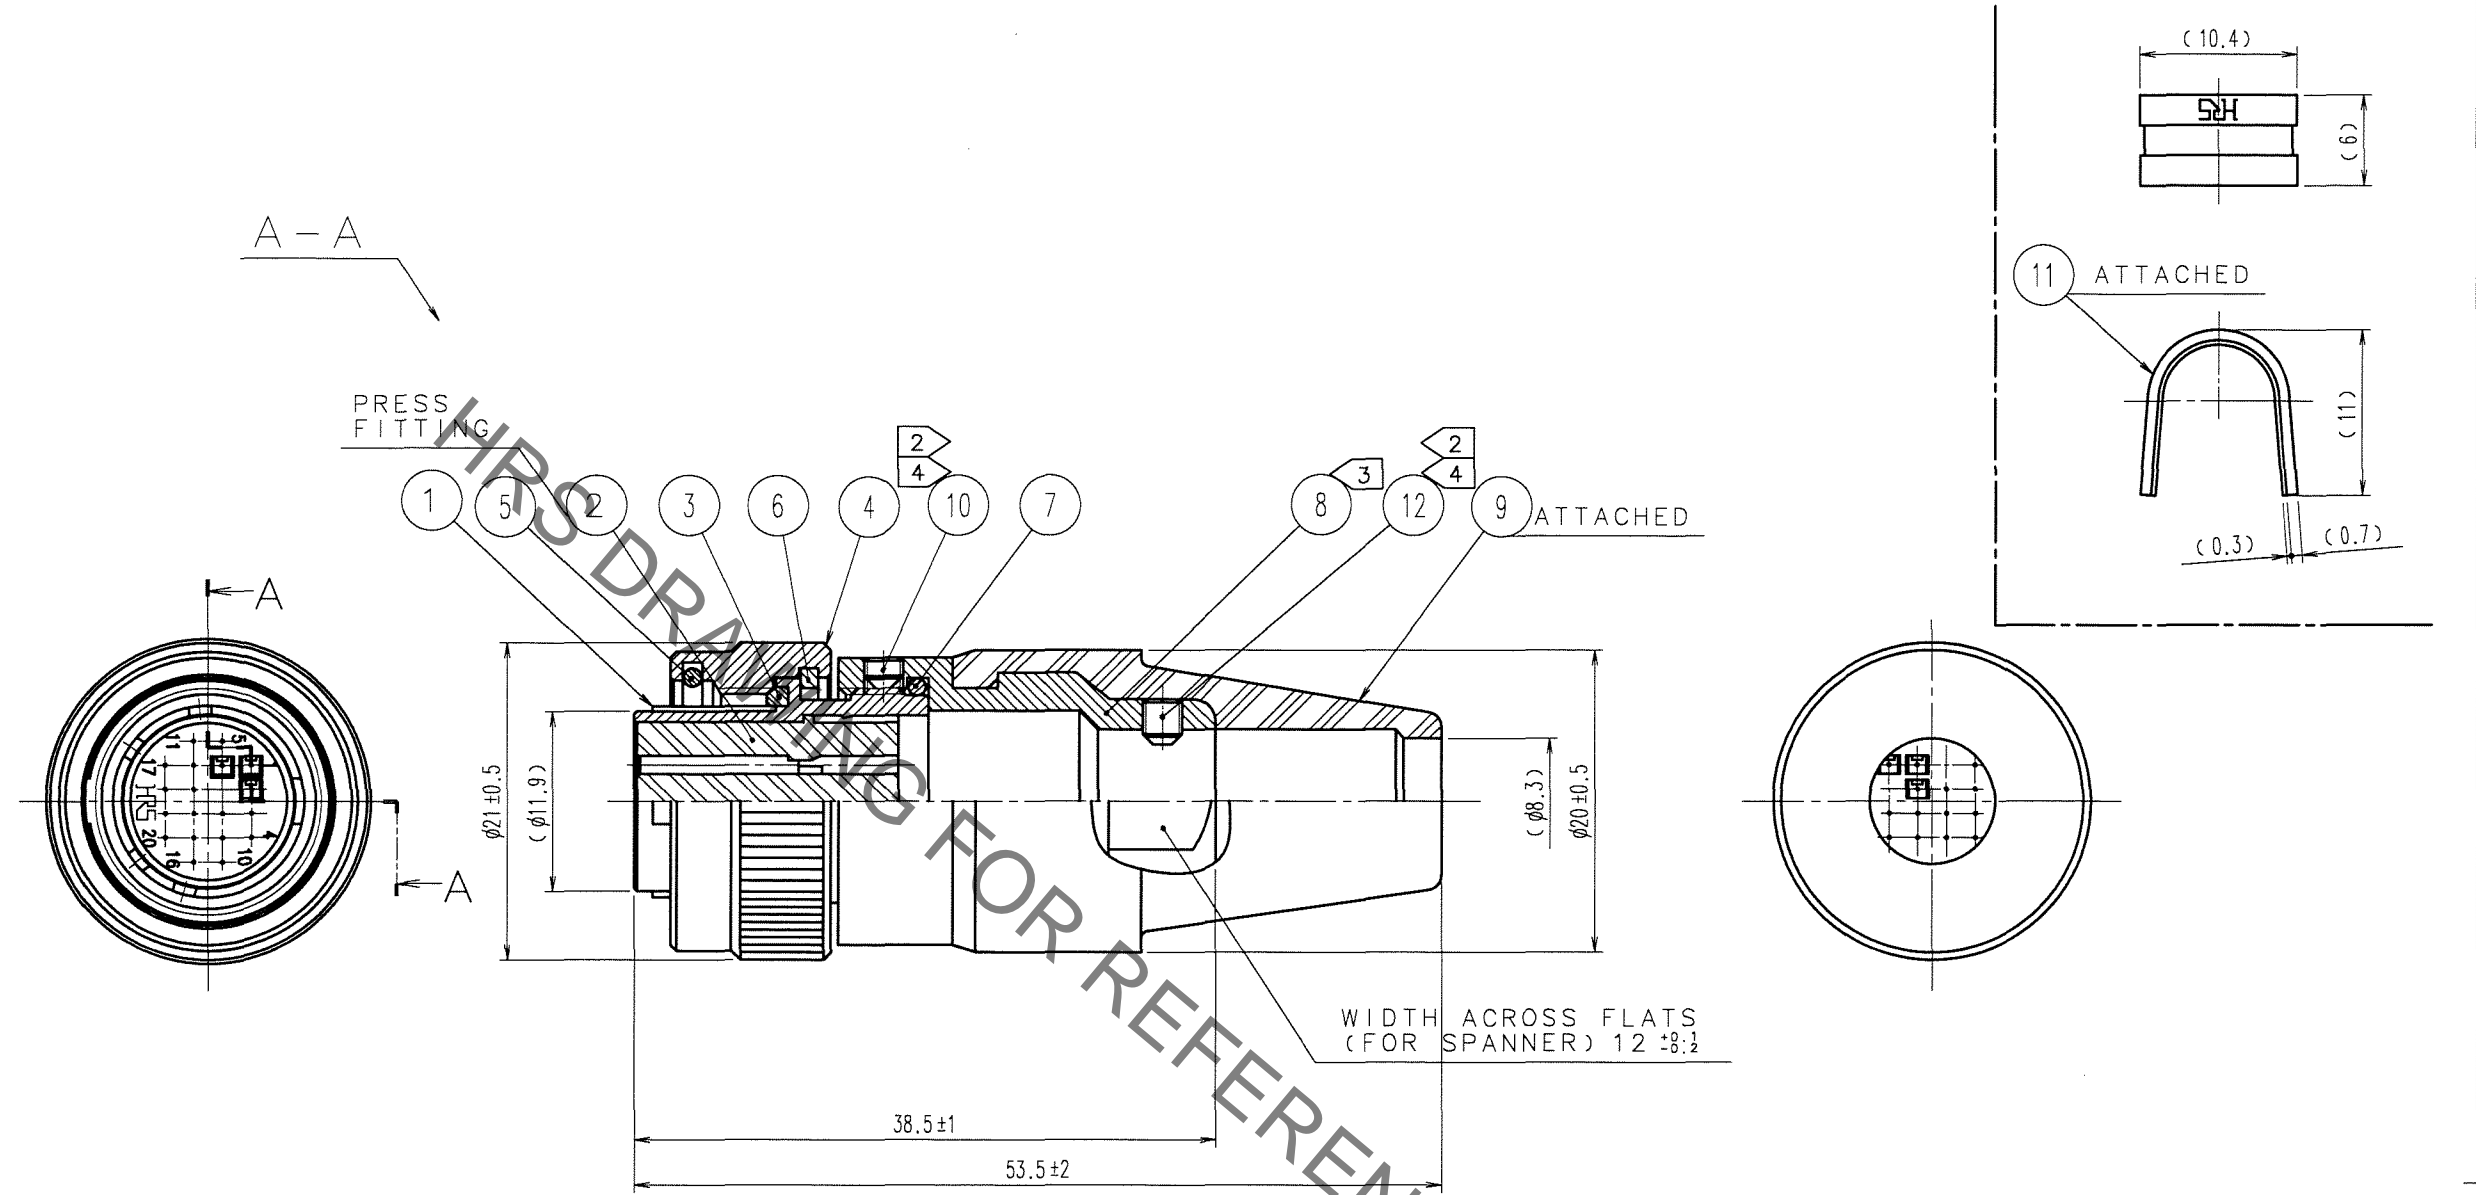

NOTE: 1 APPLICABLE CRIMPING CONTACT : HR22-SC-222(CL122-0008-8)  
(APPLICABLE WIRE : AWG#24~28, OUTER DIMENSION OF JACKET: φ 1.15MAX)  
APPLICABLE CONTACT EXTRACTION TOOL : RP6-SC-TP(CL150-0039-0)

2 ACROSS FLATS OF HEXAGON SOCKET OF REF.NO. ⑩, ⑫ : 1.27.

3 THE RECOMMENDED CLAMP TORQUE OF REF.NO. ⑧ : 2 N·m.  
LOCTITE 271 , LOCTITE OR EQUIVALENT IS RECOMMENDED TO PREVENT REF.NO. ⑧ FROM LOOSENING.

4 THE RECOMMENDED CLAMP TORQUE OF REF.NO. ⑩, ⑫ : 0.3 TO 0.4 N·m.

5 ROTATION EXAMPLES OF REF.NO. ① AND ⑧ ARE SHOWN.

6	PHOSPHOR BRONZE	NICKEL PLATING	12	STEEL	NICKEL PLATING M2.6x0.45x3
5	STEEL	ZINC CHROMATED	11	BRASS	
4	BRASS	NICKEL PLATING	10	STEEL	NICKEL PLATING M2.6x0.45x2
3	SIR	(BLACK)	9	NBR	(BLACK)
2	PBT	(BLACK) UL94V-0	8	BRASS	NICKEL PLATING
1	ZINC ALLOY	NICKEL PLATING	7	SIR	(BLACK)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	<i>J. Komatsu</i>	<i>J. Komatsu</i>	<i>E. Kunii</i>	<i>M. Sato</i>	
	06.03.17	06.03.17	06.03.18	06.03.20	

 SCALE 2 : 1 UNITS mm	DRAWING NO. EDC3-043648-73 <b>HR</b> HIROSE ELECTRIC CO., LTD.	PART NO. HR22-12TPD-20SC(73) CODE NO. CL122-0010-0-73	1/1
-----------------------------------	--	--	-----

TO  
R

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Circular Connector](#) category:*

*Click to view products by [Hirose](#) manufacturer:*

Other Similar products are found below :

[5M2530B10P](#) [600259N006](#) [600273N007](#) [6134-336-13149](#) [6134-337-11149](#) [6134-337-2390](#) [6134-341-17149](#) [6280-4SG-516](#) [6280-7SG-3DC](#)  
[6290](#) [6291A](#) [66200A-10](#) [680-SMG](#) [681-PMG](#) [CXS3102A14S2P](#) [CXS3102A181S](#) [7251-6SG-300](#) [7271-6SG-300](#) [7282-3PG-300-CH3](#) [75-](#)  
[474014-05S](#) [75-474618-01S](#) [75-474618-04S](#) [799539-000](#) [MI8-SE](#) [805-005-07NF11-19PC](#) [805-005-07NF15-7PA](#) [8280-4PG-516](#) [8280-7PG-](#)  
[519](#) [8282-5PG-519](#) [836783-1](#) [MP-4102-25P-C](#) [862256-1](#) [864019-2](#) [866857-1](#) [867865-1](#) [PT01SP-14-18P](#) [PT08P-14-5S](#) [PTSF06SE-14-12S](#)  
[120-1833-000](#) [QCM019PC2DC012B](#) [1-2069279-1](#) [121583-0217](#) [121667-0020](#) [129591AU](#) [1000B BULK](#) [RD10A16-19-P6CS051/1](#)  
[RD10A20-31-P8CS051/1](#) [RD16A14-12-S6CS051/2](#) [1301240290](#) [1301240347](#) [1301860202](#)