


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

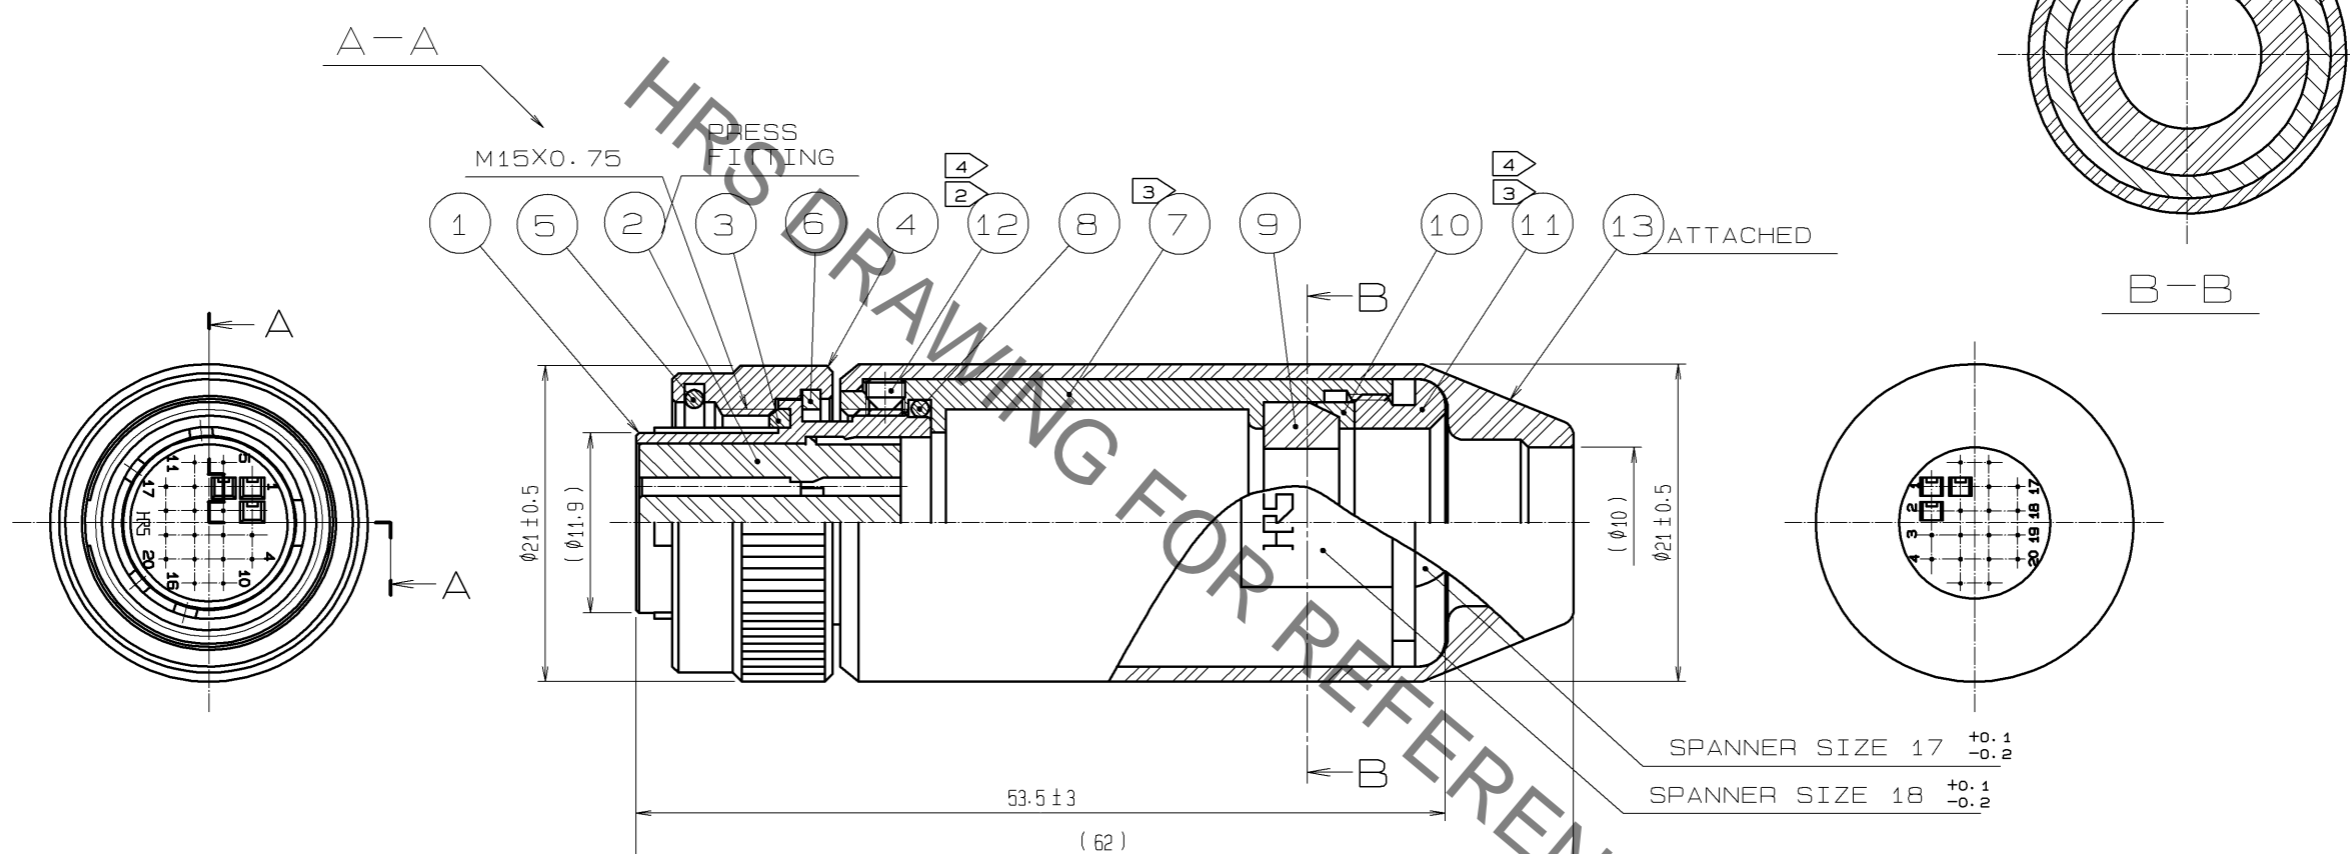

- NOTES
- 1 APPLICABLE CRIMPING CONTACT:HR22-SC-222(CL122-0008-8)
(APPLICABLE WIRE:AWG#24 TO 28, OUTER DIMENSION OF JACKET:φ1.15MAX.)
APPLICABLE CONTACT EXTRACTION TOOL:RP6-SC-TP(CL150-0039-0)
 - 2 ACROSS FLATS OF HEXAGON SOCKET OF REF.NO.⑫ :1.27.
THE RECOMMENDED CLAMP TORQUE OF REF.NO.⑫ :0.3 TO 0.4N·m.
 - 3 THE RECOMMENDED CLAMP TORQUE OF REF.NO.⑦ AND NO.⑪ :2N·m.
 - 4 LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF.NO.① AND NO.⑫ FROM LOOSENING.
 - 5 ROTATION EXAMPLES OF REF.NO.①, ⑦ AND ⑪ ARE SHOWN.
 - 6 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE.
PLEASE CONFIRM BEFORE THE USE.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
7	BRASS	NICKEL PLATING			
6	PHOSPHOR BRONZE	NICKEL PLATING	13	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
5	STEEL	NICKEL PLATING	12	STEEL	NICKEL PLATING M2.6X0.45X2
4	BRASS	NICKEL PLATING	11	BRASS	NICKEL PLATING
3	SILICONE RUBBER	(BLACK)	10	BRASS	NICKEL PLATING
2	POLYBUTYLENE TEREPHTHALATE	(BLACK) UL94V-0	9	SILICONE RUBBER	(BLACK)
1	ZINC ALLOY	NICKEL PLATING	8	SILICONE RUBBER	(BLACK)

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
APPROVED : MO. SATOH			07.01.23	DRAWING NO. EDC3-042799-73		
CHECKED : EJ. KUNII			07.01.23	PART NO. HR22-12WTPA-20SC(73)		
DESIGNED : HS. KAWASHIMA			07.01.23	CODE NO. CL122-0004-7-73		
DRAWN : MK. SATO			07.01.16			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Circular Connector](#) category:

Click to view products by [Hirose](#) manufacturer:

Other Similar products are found below :

[5M2530B10P](#) [600259N006](#) [600273N007](#) [6134-336-13149](#) [6134-337-11149](#) [6134-337-2390](#) [6134-341-17149](#) [6280-4SG-516](#) [6280-7SG-3DC](#)
[6290](#) [6291A](#) [66200A-10](#) [680-SMG](#) [681-PMG](#) [CXS3102A14S2P](#) [CXS3102A181S](#) [7251-6SG-300](#) [7271-6SG-300](#) [7282-3PG-300-CH3](#) [75-](#)
[474014-05S](#) [75-474618-01S](#) [75-474618-04P](#) [75-474618-04S](#) [799539-000](#) [MI8-SE](#) [805-005-07NF11-19PC](#) [805-005-07NF15-7PA](#) [8280-4PG-](#)
[516](#) [8280-7PG-519](#) [8282-5PG-519](#) [836783-1](#) [MP-4102-25P-C](#) [862256-1](#) [864019-2](#) [866857-1](#) [867865-1](#) [PT01SP-14-18P](#) [PT08P-14-5S](#)
[PTSF06SE-14-12S](#) [120-1833-000](#) [QCM019PC2DC012B](#) [1-2069279-1](#) [121583-0217](#) [121667-0020](#) [129591AU](#) [1000B BULK](#) [RD10A16-19-](#)
[P6CS051/1](#) [RD10A20-31-P8CS051/1](#) [RD16A14-12-S6CS051/2](#) [1301240290](#) [1301240347](#)