
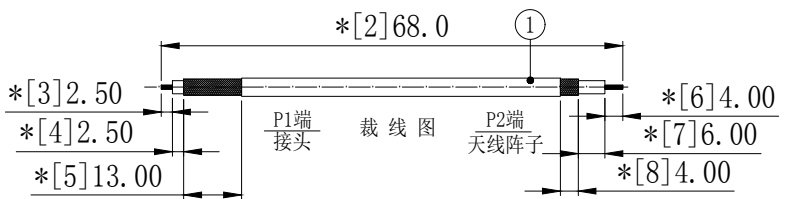


REVISION	DESCRIPTION	DATE	DRAFTER
A0	首次发行	21.01.04	S. He
A1	变更铜管和电感	21.01.26	S. He
A2	N头螺牙深4.1mm改2.1mm	21.05.07	XIU HE
A3	取消套热缩管	21.06.18	S. He

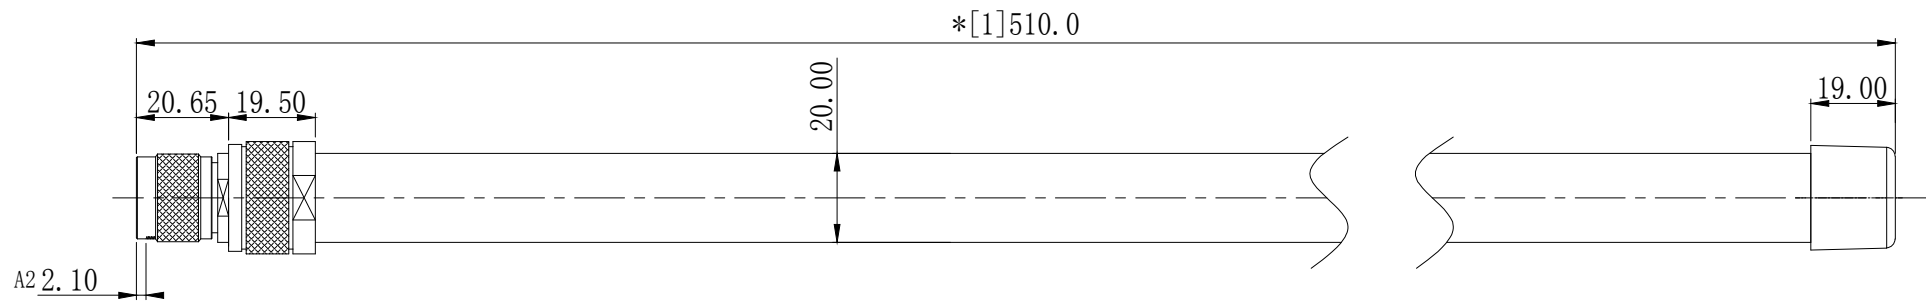

△	12	2YG117	铜管:L28.0*OD6.0mm, 两端铜塞	2	--
	11	2YT095	弹簧, 黄铜, 总长L288.5mm, 表面除油	1	--
	10	2YT093	弹簧, 黄铜, 总长L89.5mm, 表面除油	1	--
△	9	2YG120	铜管:L38.0*OD7.0*T0.2mm	1	--
△	8	2YP132	22NH电感, 尺寸: 0402	1	--
	7	2YP130	PCB, 单面板, L50.0*W9.0*T1.0正面黑油阻焊	1	--
	6	2MH077	海绵+单面背胶, L50*W30.0*T5.0mm, 黑色	4	--
	5	2SBKG5300	玻璃钢黑色POM胶帽, OD:23.5*L19mm	1	--
	4	2MH076	哑黑色玻璃钢管, OD20*L480mm, 内孔16.3	1	--
	3	2LC16P601	铜车管, OD25.0*L19.5mm, 黄铜镀镍	1	--
	2	2LC16PF901	N 公头母针, 主体+母针+防水圈, 黄铜镀镍	1	--
	1	2C5M14219BU1-68	蓝色RG141 半柔同轴线	1	依裁线图裁线
	No.	PART NUMBER	PART NAME & DESCRIPTION	Q' TY	REMARKS

技术要求:

- 1 电气特性: 特性阻抗:50Ω; 频率范围:1.88-1.93GHz VSWR<1.8; Gain:7dBi, 接头铆压。
- 2 尺寸检验: [*]为FAI检测项目; *为重点检测项目; ■为CPK管制项目。
- 3 外观检验: 检验方法: 目视全检。
- 4 包装规范: 1PCS/气泡袋, 纸箱规格L:750*W:220*H:50mm。
- 5 环保要求: 产品及其使用之物料皆需要符合RoHS要求。

GENERAL TOLERANCE:
LINEAR:

X	±2.00
X.X	±1.00
X.XX	±0.20
X.XXX	±0.01
ANGLE:	
X°	±4.00°
X.X°	±3.00°
X.XX°	±2.00°
X.XXX°	±1.00°

HJ-Tech 东莞市皇捷通讯科技有限公司

FILE NAME: 产品图 TITLE: 玻璃钢天线
1.88-1.93GHz 玻璃钢天线 7dBi天线,
OD20*L510mm

ENG/DATE: SQW/20.12.11

CHE/DATE: P/N: 3E0702BK-001-1880mhz-1930mhz

APP/DATE: UNIT: mm SCALE: REVISION: AO SHEET: 1/1

COMPLIANCE WITH THE REQUIREMENT: ■RoHS; □HF; □SONY SS-00259; □OTHERS
*NO USING ESTRICED AND BANNED SUBSTANCE

H431

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [HJ Technology](#) manufacturer:

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W6102B0100](#) [SPDA17RP918](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [108-00016-050](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1049B090](#) [TRABT1560](#) [A75-001](#) [W3118A](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [0600-00060](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [C37](#) [MAF94051](#) [FRX380](#) [MA9-5N](#) [B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [PSQ24495-91RSM](#) [MIKROE-2393](#) [DA5-32RADOME](#) [5200227](#) [GPSCPMM00](#) [W1049B030](#) [SPDA17RP918](#) [GPSCP00](#) [AN 303](#) [ANTDOM-05-01-WPM](#) [EXW30BNX](#) [OSCAR1A/5M/SMAM/S/S/31](#) [ALPHA4A/1M/SMAM/S/S/26](#) [OSCAR1A/10M/SMAM/S/S/31](#) [OSCAR40/5M/LL/SMAM/S/S/33](#) [OSCAR40/10M/LL/SMAM/S/S/33](#)